

Reduce cost, footprint and arc-flash hazard



Today's power distribution components are expected to provide reliable performance and reduced footprint without breaking the budget. Eaton's breaker integrated transformer (BIT) meets these needs by integrating a traditionally separate molded case circuit breaker (MCCB) (primary, secondary or both simultaneously) and a low-voltage dry-type distribution transformer package—arriving factory assembled and fully tested to help you reduce the footprint and overall cost of your electrical distribution system.

Features and benefits

Reduced project costs

- Replace the need for separate power distribution components with a fully enclosed MCCB integrated into Eaton's proven low-voltage dry-type distribution transformer technology
- Eliminate the need for extra panels, equipment, floor space and associated installation labor

Minimized footprint

- Take advantage of space savings with an integrated design that can save up to 30% compared to traditional, separately installed solutions
- Reduce installation footprint with 2-inch transformer-to-wall clearance

Simplified installation

- Meet NEC® 450.10A with a factory-installed ground bar
- Large cable entry area and wiring space for ease of installation
- Easy conveyance with 4-inch bottom-to-floor clearance

Enhanced power system flexibility

- Easily configure to specific application needs with a wide range of primary and secondary breaker choices
- Use Eaton's transformer Flex Center to meet special customer needs, including enclosure type, safety requirements, monitoring devices and more
- Reduce hazard of arc flash
- Arcflash Reduction Maintenance System™ compatible on 400 A and above applications

Compare the installation time savings—18% less


The table below shows the time saved by incorporating an Eaton BIT vs. a three-component system that uses a separate breaker, transformer and loadcenter.

Estimates in hours ①

Installation	45 kVA	
	Three-component system	Eaton BIT
Breaker layout	4	0
Breaker and fuse mount	3	0
Transformer layout, remove knockout, etc.	24	24
Loadcenter layout, mount and connect source	6	6
Total hours	37	30
Percent of time saved with Eaton's BIT	18% savings	

① Time estimates are typical and will vary by geographical area.

Reduce space (up to 30%) and cost with BIT transformers

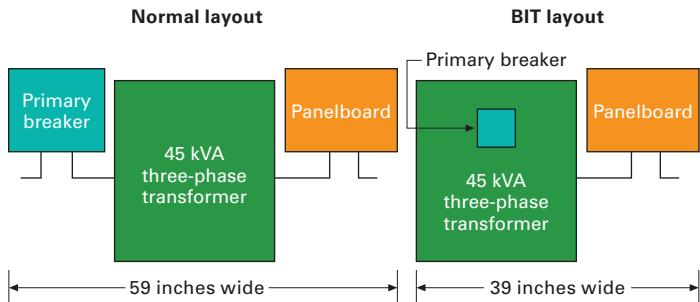

Example of BIT with primary breaker shown; other configurations include secondary breaker, primary and secondary breakers, or two secondary breakers.


Customized to meet your needs

To help with unique breaker integrated transformer needs that cannot be met with standard offerings, Eaton's transformer Flex Center provides the ability to engineer or modify solutions to solve your most critical application challenges—with full access to our expert team of engineers.

Options include, but are not limited to:

- Tailor-made configurations and dimensions
- Harmonic mitigation transformers
- K-Factor rated transformers
- Custom testing for compliance with industry and regional standards
- NEMA® Type 3R with the addition of weathershields
- Stainless steel (304 or 316) enclosures, NEMA Type 1 or 3R construction
- Infrared windows to ease diagnostics
- Easy-access hinged doors to simplify maintenance and testing
- Custom paint colors
- Custom designs to meet special requirements for efficiency, sound, voltage, kVA ratings, impedance, altitude and temperature rise needs

Voltage, kVA ratings, catalog numbering system

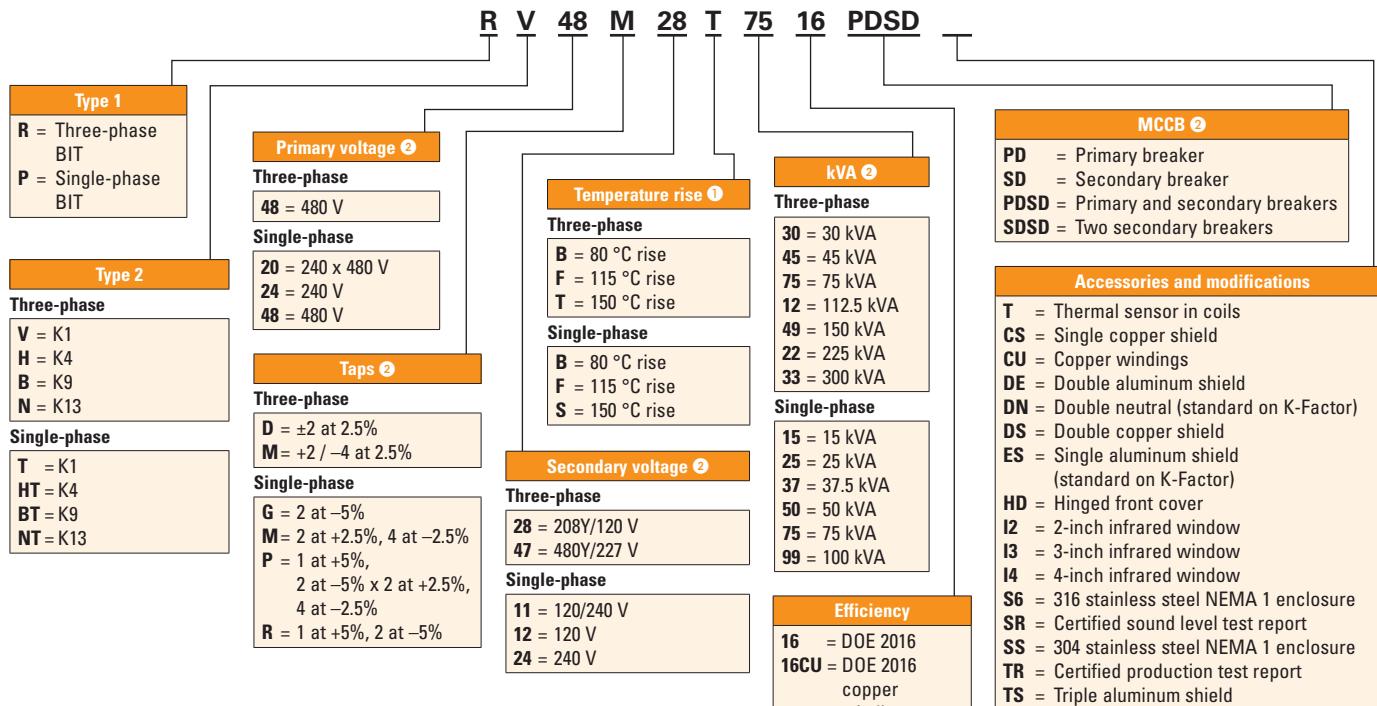

① 220 °C insulation.

② For custom configurations, contact the Flex Center at DTDTflex@eaton.com.

Technical specifications

Single-phase—Type DS-3 60 Hz DOE 2016 energy-efficient

kVA	Temperature rise °C	Frame	Wiring diagram	Weight lb (kg)	Circuit breaker		Catalog number
					Primary	Secondary	
480 volts to 120/240 volts primary breaker—aluminum windings							
15	150	FR842ASD	84215BP	131 (59)	PDG22F0040TFFJ	—	PT48M11S1516PD
25	150	FR842ASD	84225BP	199 (90)	PDG22F0060TFFJ	—	PT48M11S2516PD
37.5	150	FR843ASD	84337BP	245 (111)	PDG22F0100TFFJ	—	PT48M11S3716PD
50	150	FR843ASD	84350BP	313 (142)	PDG22F0125TFFJ	—	PT48M11S5016PD
75	150	FR844ASD	84475BP	460 (209)	PDG22F0200TFFJ	—	PT48M11S7516PD
100	150	FR844ASD	84499BP	548 (249)	PDG32F0250TFAJ	—	PT48M11S9916PD
240 x 480 volts to 120/240 volts secondary breaker—aluminum windings							
15	150	FR842ASD	84215CS	131 (59)	—	PDG22F0080TFFJ	PT20P11S1516SD
25	150	FR842ASD	84225CS	199 (90)	—	PDG22F0125TFFJ	PT20P11S2516SD
37.5	150	FR843ASD	84337CS	245 (111)	—	PDG22F0200TFFJ	PT20P11S3716SD
50	150	FR843ASD	84350CS	313 (142)	—	PDG32F0250TFAJ	PT20P11S5016SD
75	150	FR844ASD	84475CS	460 (209)	—	PDG32F0400TFAJ	PT20P11S7516SD
100	150	FR844ASD	84499CS	548 (249)	—	PDG32F0500TFAJ	PT20P11S9916SD
480 volts to 120/240 volts primary breaker—copper windings							
15	150	FR842ASD	84215BP	172 (78)	PDG22F0040TFFJ	—	PT48M11S1516CUPD
25	150	FR842ASD	84225BP	217 (98)	PDG22F0060TFFJ	—	PT48M11S2516CUPD
37.5	150	FR843ASD	84337BP	244 (111)	PDG22F0100TFFJ	—	PT48M11S3716CUPD
50	150	FR843ASD	84350BP	365 (166)	PDG22F0125TFFJ	—	PT48M11S5016CUPD
75	150	FR844ASD	84475BP	576 (261)	PDG22F0200TFFJ	—	PT48M11S7516CUPD
100	150	FR844ASD	84499BP	548 (249)	PDG32F0250TFAJ	—	PT48M11S9916CUPD
240 x 480 volts to 120/240 volts secondary breaker—copper windings							
15	150	FR842ASD	84215CS	172 (78)	—	PDG22F0080TFFJ	PT20P11S1516CUSD
25	150	FR842ASD	84225CS	217 (98)	—	PDG22F0125TFFJ	PT20P11S2516CUSD
37.5	150	FR843ASD	84337CS	244 (111)	—	PDG22F0200TFFJ	PT20P11S3716CUSD
50	150	FR843ASD	84350CS	365 (166)	—	PDG32F0250TFAJ	PT20P11S5016CUSD
75	150	FR844ASD	84475CS	576 (261)	—	PDG32F0400TFAJ	PT20P11S7516CUSD
100	150	FR844ASD	84499CS	548 (249)	—	PDG32F0500TFAJ	PT20P11S9916CUSD

Note: For custom configurations including primary and secondary breakers installed simultaneously, contact the DTDT Flex Center at DTDTflex@eaton.com.

Single-phase breaker information

Circuit breaker	Nominal trip unit (amperes)	kAIC at 480 Vac	Standard lug capacities			Frame
			Per phase	Minimum wire size	Maximum wire size	
PDG22F0040TFFJ	40	25	(1) #14	(1) 1/0	PDG2X2T100	842SD
PDG22F0060TFFJ	60	25	(1) #14	(1) 1/0	PDG2X2T100	842SD
PDG22F0080TFFJ	80	25	(1) #14	(1) 1/0	PDG2X2T100	843SD
PDG22F0100TFFJ	100	25	(1) #14	(1) 1/0	PDG2X2T100	843SD
PDG22F0125TFFJ	125	25	(1) #4	(1) 4/0	PDG2X2TA225	844SD
PDG22F0150TFFJ	150	25	(1) #4	(1) 4/0	PDG2X2TA225	844SD
PDG22F0200TFFJ	200	25	(1) #4	(1) 4/0	PDG2X2TA225	844SD
PDG32F0250TFAJ	250	25	(1) 250 kcmil	(1) 500 kcmil	PDG3X2TA350	844SD
PDG32F0400TFAJ	400	25	(2) 3/0	(2) 250 kcmil	PDG3X2TA400	844SD
PDG32F0500TFAJ	500	25	(2) #2	(2) 500 kcmil	PDG3X2TA630	844SD
PDG52K0800E2NN	800	50	N/A	N/A	Not included	
PDG52K1200E2NN	1200	50	N/A	N/A	Not included	

Single-phase dimensions in inches (mm)

Frame	① kVA	Height (H)	Width (W)	Depth (D)
842SD	15	43.09 (1094)	23.02 (585)	17.40 (442)
842SD	25	43.09 (1094)	23.02 (585)	17.40 (442)
843SD	37.5	48.16 (1223)	26.97 (685)	24.38 (619)
843SD	50	48.16 (1223)	26.97 (685)	24.38 (619)
844SD	75	68.35 (1736)	37.63 (956)	27.12 (689)
844SD	100	68.35 (1736)	37.63 (956)	27.12 (689)

① Suffix SD changes to DD when either one primary breaker and one secondary breaker, or two secondary breakers are configured.

