



Customer information packet

EM2275

5HP, 1160RPM, 3PH, 60HZ, 254U, 0748M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	254U
Frame Material	Iron
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	CSA CSA EEV UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	15.800 A @ 208.0 V 7.300 A @ 460.0 V 14.600 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part detail

Revision	F
Type	AC
Mech. spec.	07H287
Base	
Status	PRD/A
Elec. spec.	07WGX823
Layout	07LYH287
Eff. date	08-26-2021
CD Diagram	CD0005
Poles	06
Leads	9#14
Proprietary	False
Created date	02-23-2015

Heater Indicator	No Heater
High Voltage Full Load Amps	7.3 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0748M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	20.82 IN
Power Factor	72
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1160 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP1259L										
CAT.NO.	EM2275									
SPEC.	07H287X823G2									
HP	5									
VOLTS	230/460									
AMP	14.6/7.3									
RPM	1160									
FRAME	254U		HZ	60		PH	3			
SER.F.	1.15	CODE	K	DES	A	CL	F			
NEMA-NOM-EFF	90.2	PF	72							
RATING	40C AMB-CONT									
CC	010A		USABLE AT 208V					15.8		
DE	6309		ODE	6307						
ENCL	TEFC	SN								

Parts list

Part number	Description	Quantity
SA294216	SA 07H287X823G2	1.000 ea
RA280298	RA 07H287X823G2	1.000 ea
37FN3002C01	EXFN, PLASTIC, 6.00 OD, 1.155 ID	1.000 ea
HW3201A01	1/2-13 EYEBOLT	1.000 ea
09CB3002SP	CB W/1.38 LEAD HOLE FOR 37, 39, 307 & 30	1.000 ea
09GS1000	GASKET-CONDUIT BOX, 1/16 THICK LEXIDE	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
59XW2520G07	.25-20X.44,HEX SER WSHR,TAPTITE 2,GREEN	1.000 ea
WD1000B16	T&B CX70TN OR L70P TERMINAL LUG	1.000 ea
37PE1101A03	FR/PU ENDPLATE, MACH	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A08	W3118-035 WVY WSHR (WB)	1.000 ea
07EP1116A01	ENDPLATE, MACH	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea
07FH4007SP	PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
09CB3501SP	CONDUIT BOX LID FOR 09CB3001 & 09CB3002	1.000 ea
09GS1013SP	GS FOR 09CB3501, 12CB1500 & 12CB1503 LID	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
HW2501F24	KEY, 5/16 SQ X 2.750	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
HA3104A25	THRUBOLT .31-18 X 14.75	4.000 ea
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.036 ga
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119N)	1.000 ea
NP1259L	ALUM SUPER-E UL CSA-EEV CC NEMA PREMIUM	1.000 ea
07PA1011	PKG GRP, 07 CAST IRON PK1181	1.000 ea

MN416A01

TAG-INSTAL-MAINT no wire (2100bx)4/22

1.000 ea

AC Induction Motor Performance Data

Record # 23676

Typical performance - not guaranteed values

Winding: 07WGT399-R001		Type: 0756M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	5	Full Load Torque	22.64 LB-FT		
Volts	460	Start Configuration	direct on line		
Full Load Amps	8	Breakdown Torque	99.32 LB-FT		
R.P.M.	1160	Pull-up Torque	60.42 LB-FT		
Hz	60	Locked-rotor Torque	72.58 LB-FT		
NEMA Design Code	B	Starting Current	66.86 A		
Service Factor (S.F.)	1	No-load Current	4.87 A		
NEMA Nom. Eff.	89.5	Line-line Res. @ 25°C	1.33 Ω		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	49°C		
		Locked-rotor Power Factor	22		
		Rotor inertia	1.39 LB-FT ²		

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	28	45	58	66	71	74
Efficiency	83.1	88.8	90.2	90.4	89.8	89
Speed	1192	1185	1178	1171	1162	1153
Line amperes	5.13	5.79	6.72	7.95	9.22	10.57


ABB Motors and Mechanical Inc.

WINDING # 07WGT399


Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1160 RPM 460 V 0756M


TORQUES (LB-FT): PO=99.32 PU=60.42 LR=72.58 LRA=66.86

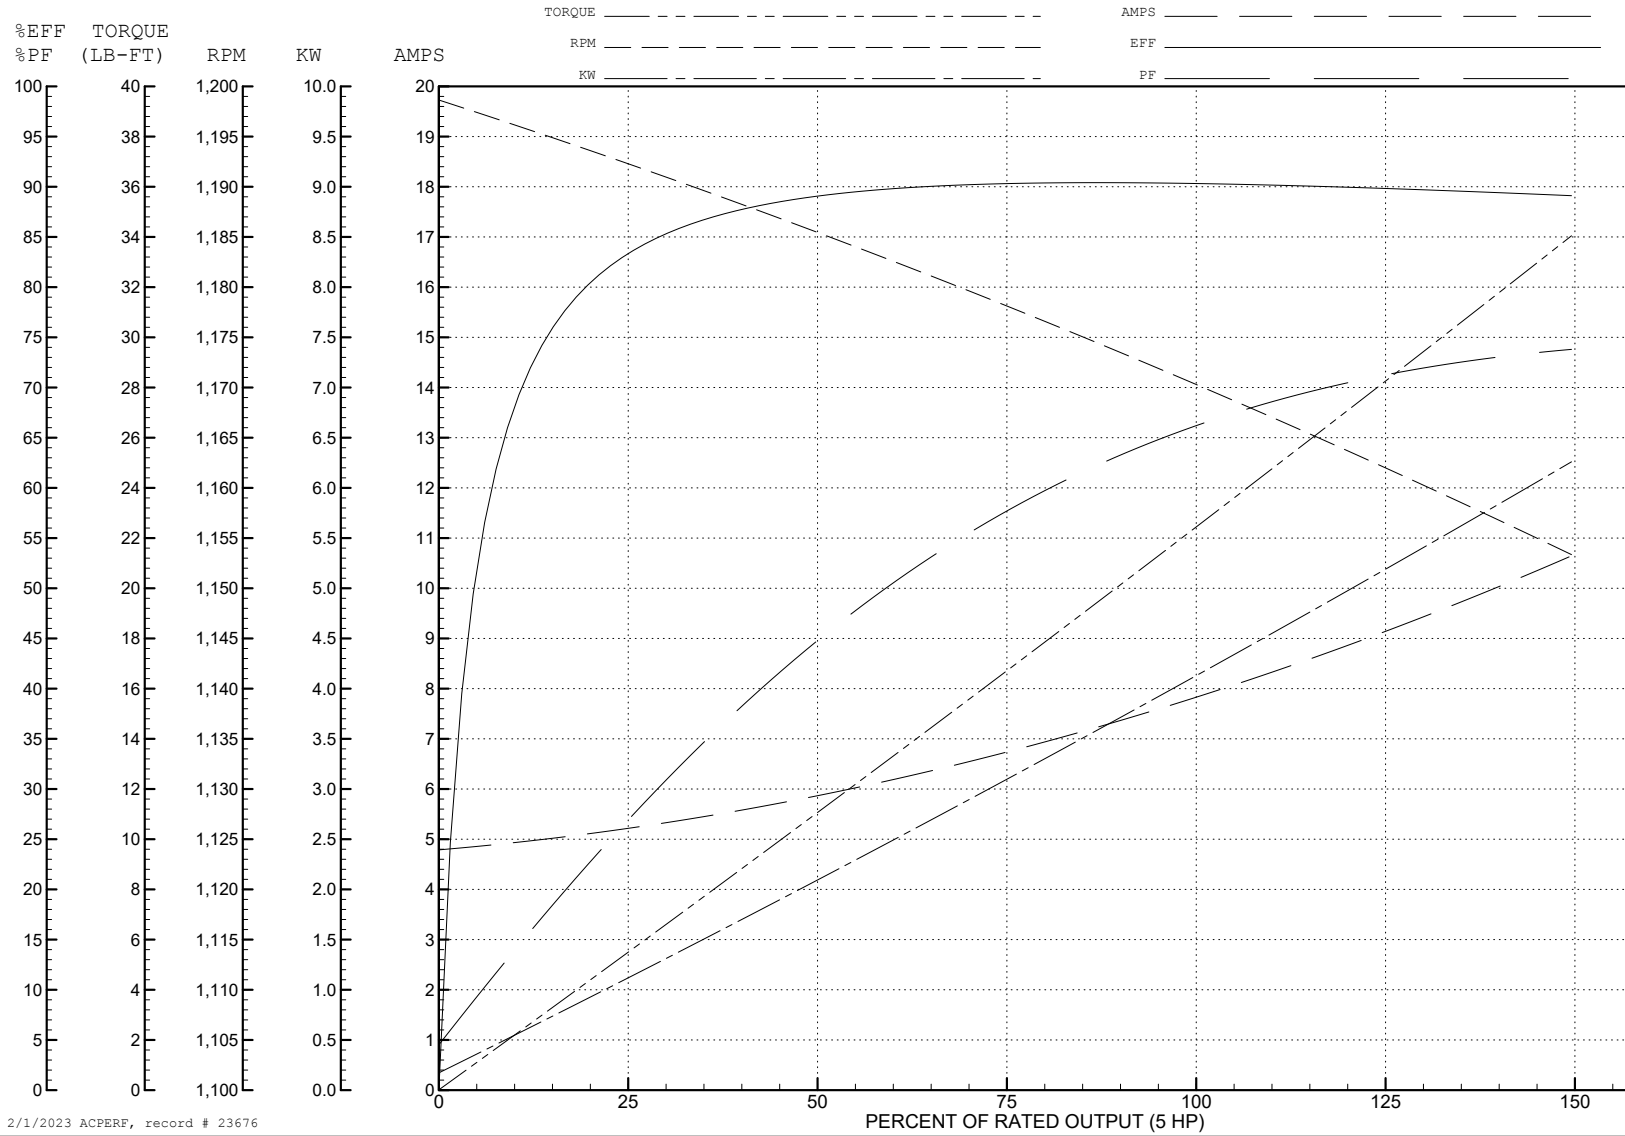

2/1/2023 ACPERF, record # 23676

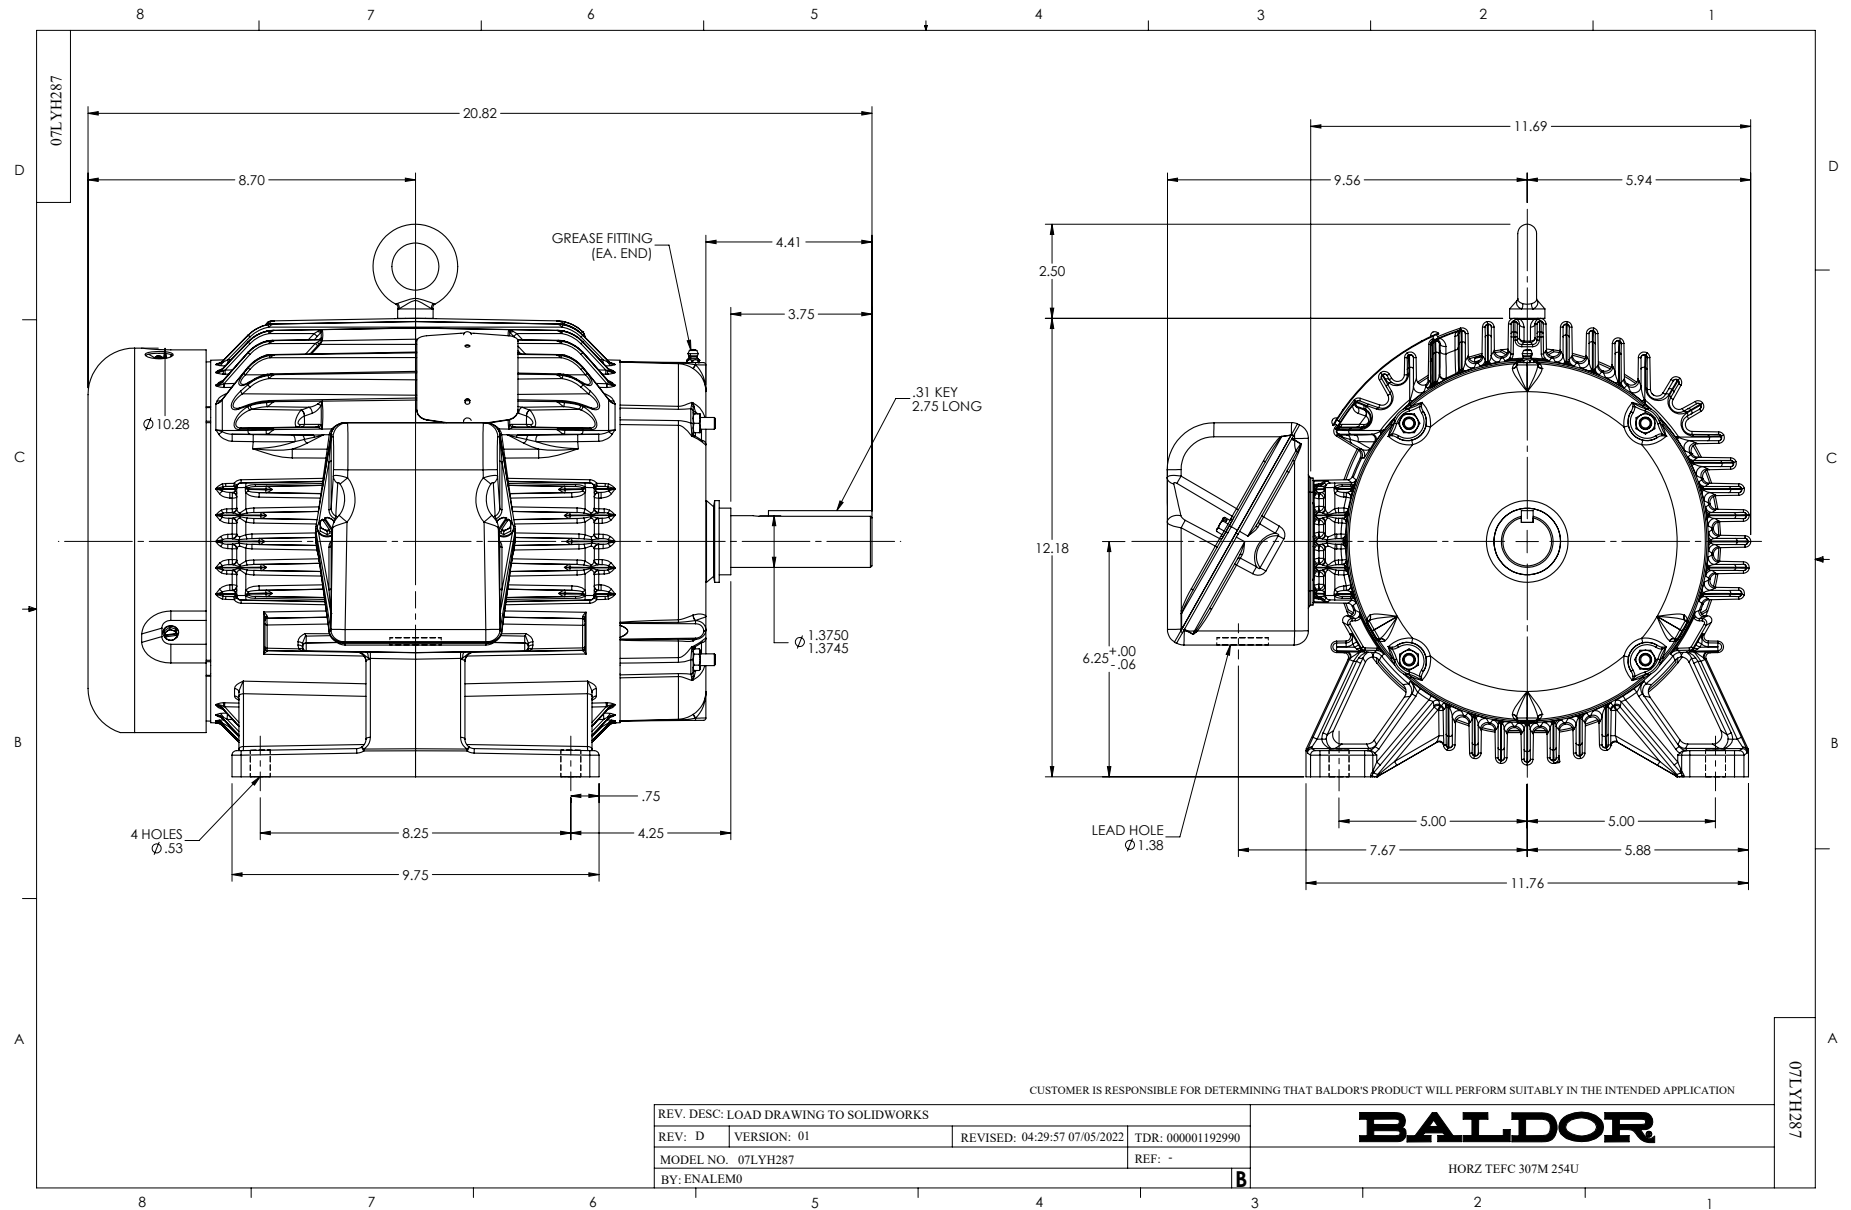

CD0005

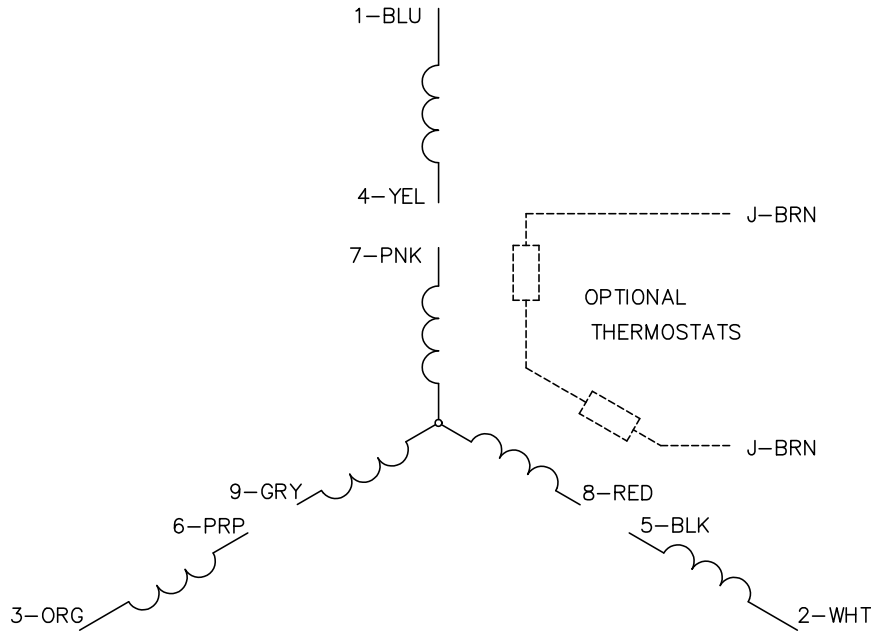


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS