

BALDOR • RELIANCE

Customer information packet

EM2538T-8

40HP, 3530RPM, 3PH, 60HZ, 286TS, 4046M, OPSB, F

Specifications

Enclosure	OPSB
Frame	286TS
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CSA UR NEMA PREMIUM CSA EEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	105.000 A @ 200.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	105.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part detail

Revision	M
Type	AC
Mech. spec.	40G51
Base	
Status	PRD/A
Elec. spec.	40WGX239
Layout	40LYG051
Eff. date	04-15-2019
CD Diagram	CD0695
Poles	02
Leads	6#4
Proprietary	False
Created date	05-14-2012

KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 4 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4046M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	22.44 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Part Winding
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554L

CAT.NO.	EM2538T-8	P/N		ENCL	OPSB
SPEC.	40G051X239	CC	010A	FRAME	286TS
HP	40	CLASS	F	HZ	60
RPM	3530	PH	3	DES	B
VOLTS	200	CODE	G	ODE BRG	6309
AMPS	105	USABLE AT 208V			
RATING	40C AMB-CONT	NEMA-NOM-EFF	92.4	GREASE	POLYREX EM
PF	89	SER.F.	1.15	VPWM INVERTER READY	
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.			

Parts list

Part number	Description	Quantity
SA244596	SA 40G051X239	1.000 ea
RA231479	RA 40G051X239	1.000 ea
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME ZINC	2.000 ea
HA6017	CAST ADAPTER, 40,42 KOBX	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	2.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
19XW3118G08	.31-18X.50,HEX WSHR HD,TAPTITE 2,GREEN	1.000 ea
10CB3000SP	KOBX, CAST W/2.00 LEAD HOLE	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	4.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 ea
40EP3200A02	STD FREP OPEN 309 BRG	1.000 ea
HW5100A11	W3917-042 WVY WSHR (WB)	1.000 ea
40EP3200B05	STD PUEP OPEN 311 BRG	1.000 ea
XY3816A12	3/8-16 FINISHED NUT	8.000 ea
10CB3500SP	CONDUIT BOX LID, CAST	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
HW2501G17	KEY, 3/8 SQ X 1.875	1.000 ea
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2200bx) 4/22	1.000 ea
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 ea
HW4500A20	1/8NPT SL PIPE PLUG	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.070 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	4.000 ea
40AD2002B01	LEXAN BAFFLE 40 FR OPEN	1.000 ea

40AD2002B01	LEXAN BAFFLE 40 FR OPEN	1.000 ea
HA3154A03	STUD, 3/8-16 X 17.75	4.000 ea
LB1119N	WARNING LABEL	1.000 ea
LC0695	CONNECTION LABEL	1.000 ea
NP3554L	SS SUPER-E UL CSA-EEV PREM CC	1.000 ea
40PA1000	PACKAGING GROUP	1.000 ea

Accessories

Part number	Description	Multiplier
40-1400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 38392

Typical performance - not guaranteed values

Winding: 40WGX239-R001		Type: 4046M	Enclosure: OPSB		
Nameplate Data			200 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)	40	Full Load Torque	59.6 LB-FT		
Volts	200	Start Configuration	direct on line		
Full Load Amps	105	Breakdown Torque	210 LB-FT		
R.P.M.	3530	Pull-up Torque	75.8 LB-FT		
Hz	60 Phase	3	Locked-rotor Torque	104 LB-FT	
NEMA Design Code	B	KVA Code	G	Starting Current	658 A
Service Factor (S.F.)	1.15	No-load Current	27.6 A		
NEMA Nom. Eff.	92.4	Power Factor	89	Line-line Res. @ 25°C	0.0332 Ω
Rating - Duty	40C	AMB-CONT	Temp. Rise @ Rated Load		35°C
S.F. Amps			Temp. Rise @ S.F. Load		43°C
			Locked-rotor Power Factor	24	
			Rotor inertia	1.97 LB-FT ²	

Load Characteristics 200 V, 60 Hz, 40 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	64	81	88	89	90	90	90
Efficiency	90.6	93.4	93.4	92.7	91.8	90.7	92.2
Speed	3581	3566	3548	3529	3506	3483	3515
Line amperes	37.8	57	79.4	105	130	159	120


ABB Motors and Mechanical Inc.

WINDING # 40WGx239


Typical performance - not guaranteed values.

40 HP 3 PH 60 HZ 3530 RPM 200 V 4046M


TORQUES (LB-FT): PO=210 PU=75.8 LR=104 LRA=658

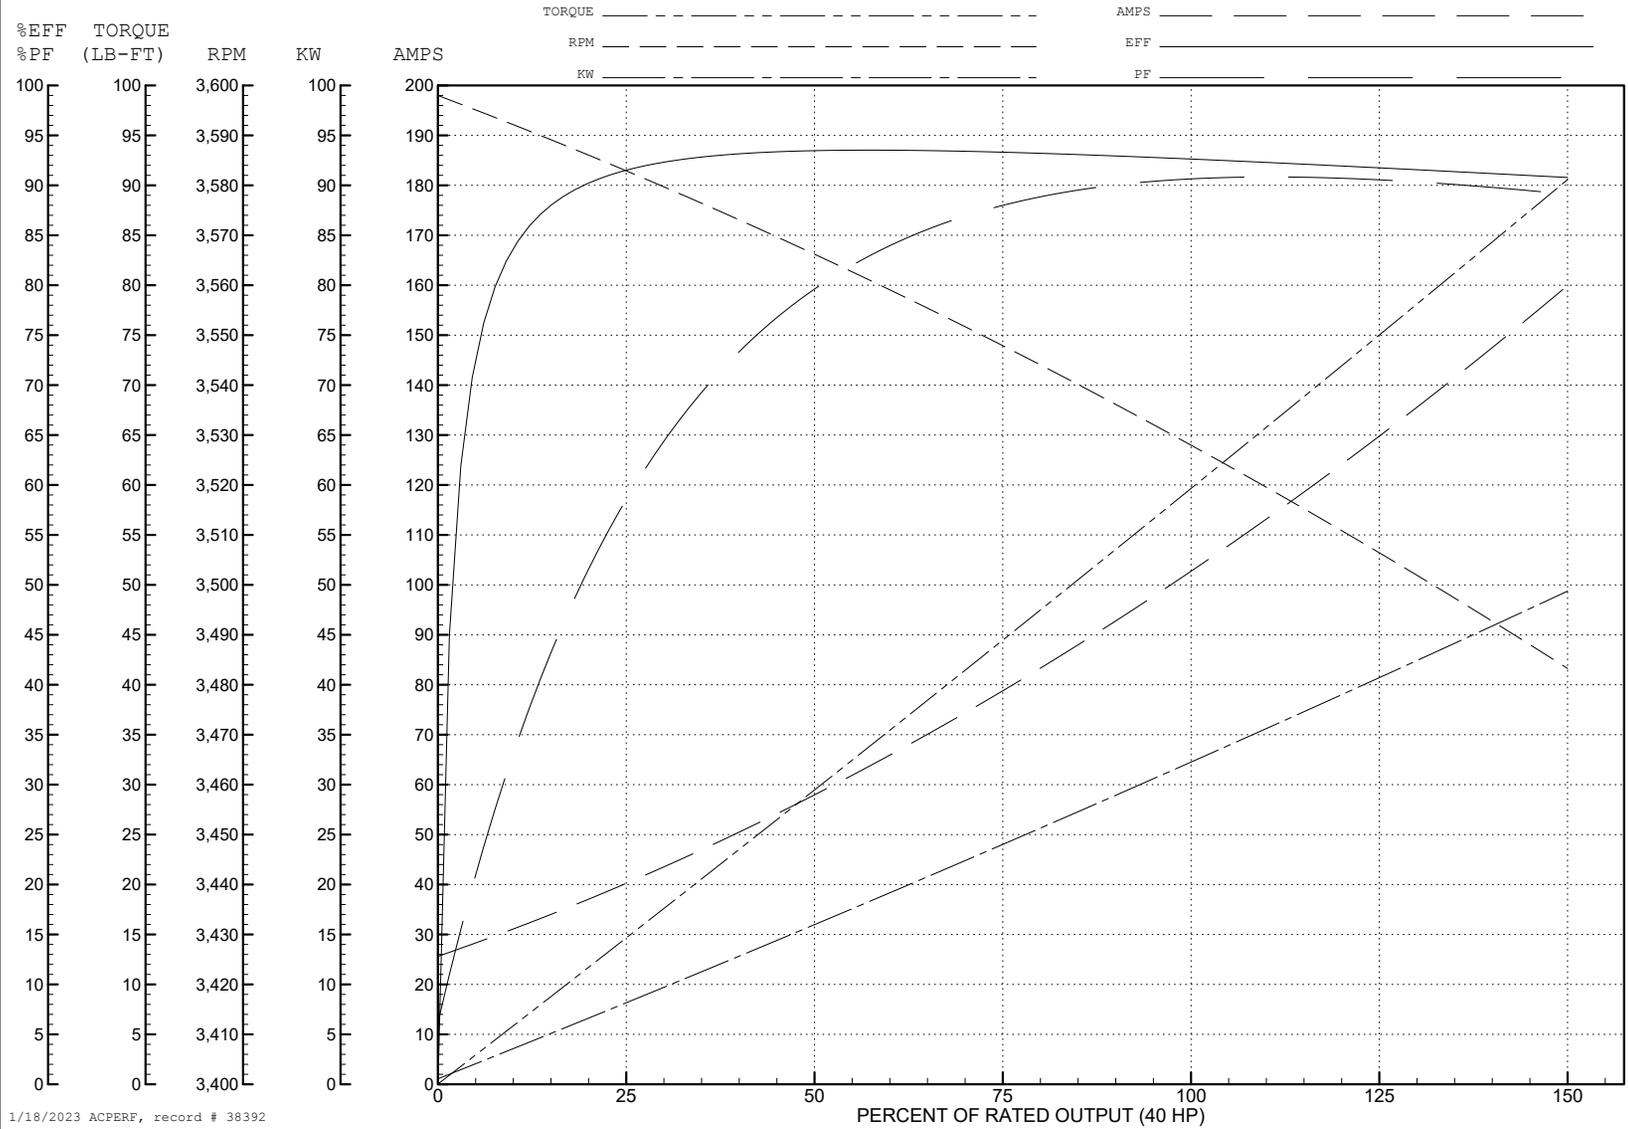


1/18/2023 ACPERF, record # 38392

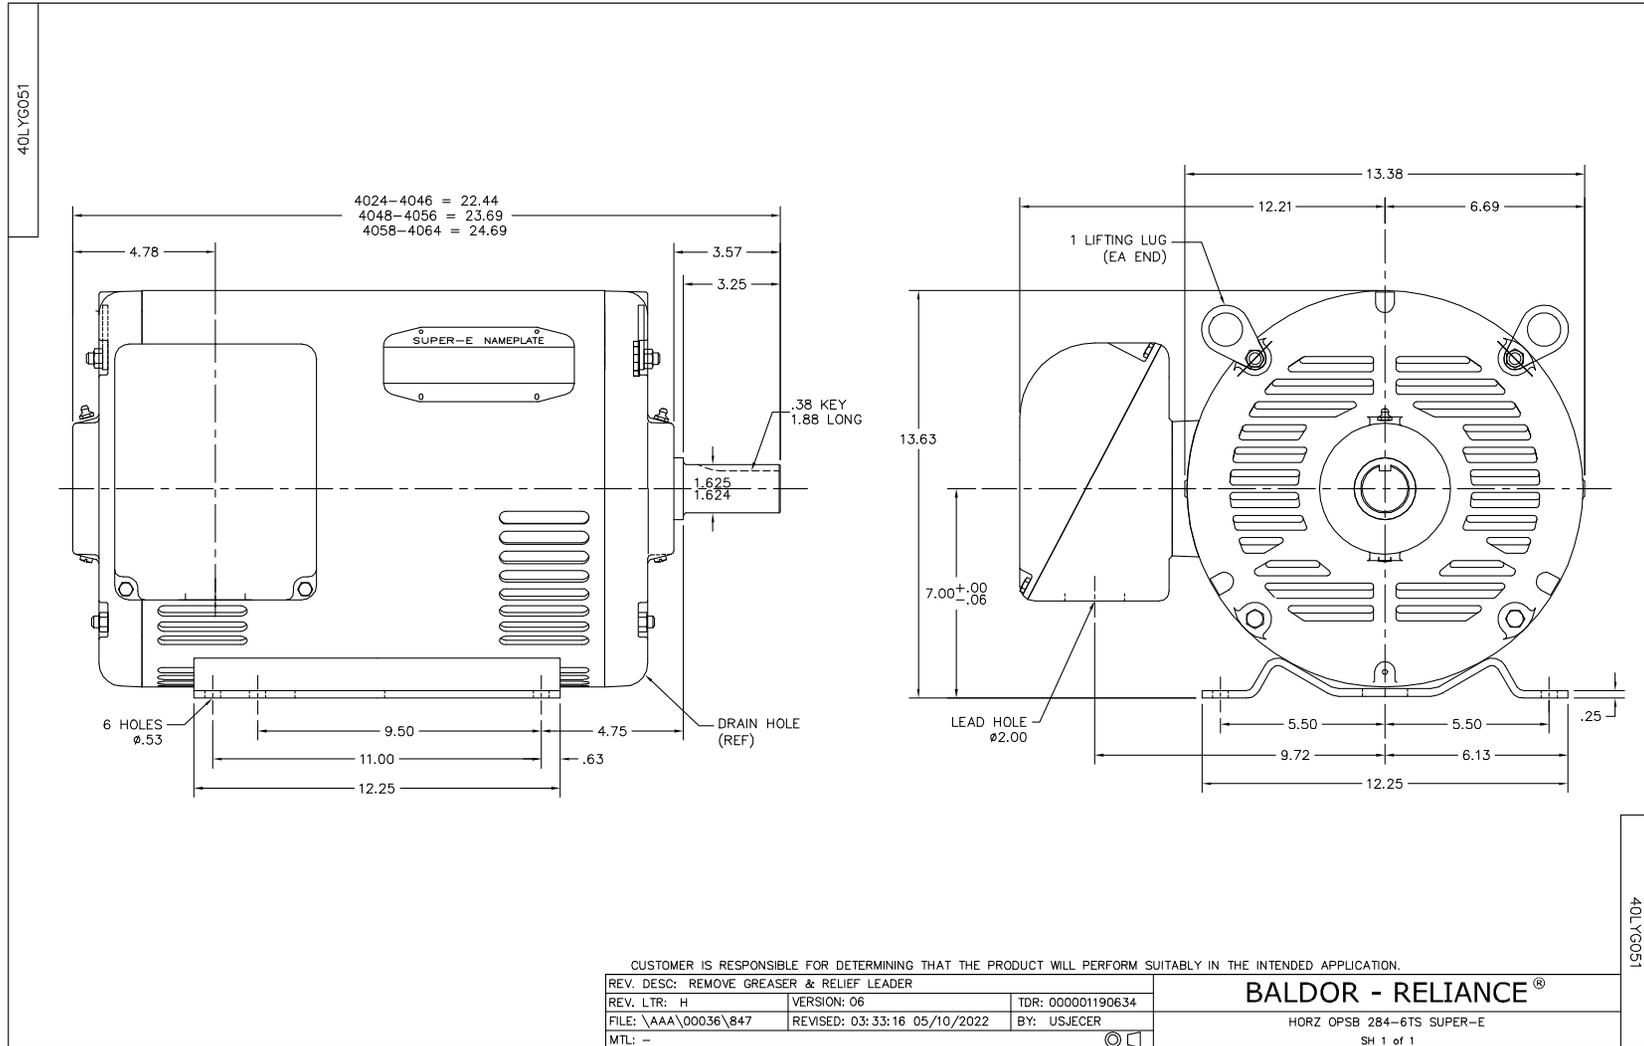



CD0695

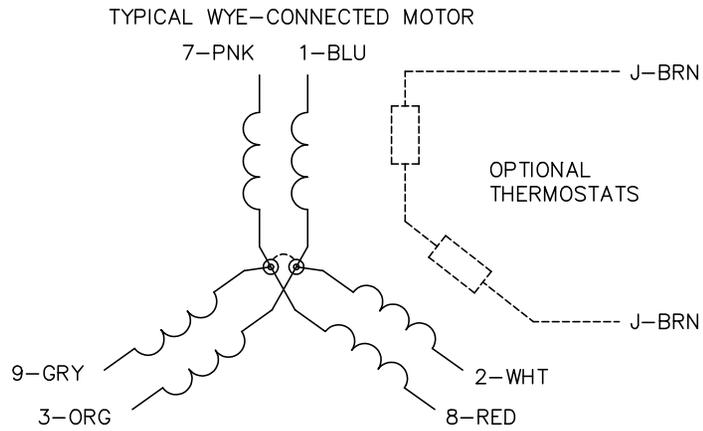

START CONNECTION



RUN CONNECTION

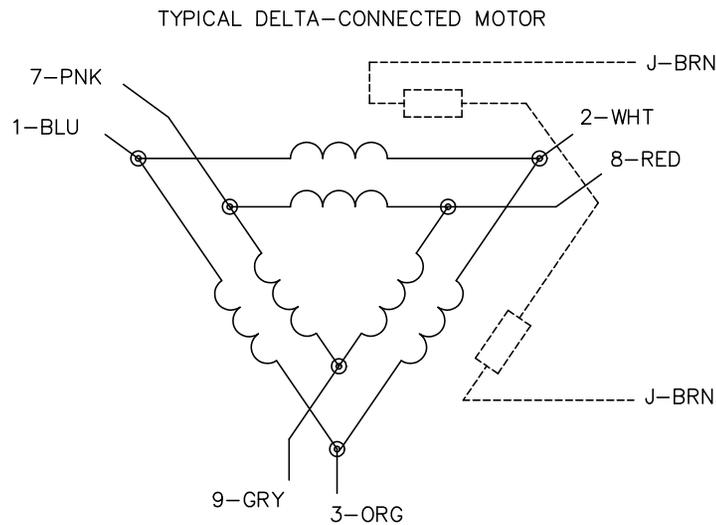

NOTES:

1. MOTOR MAY BE WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0695

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: C	BY: JLP	REVISED: 01/21/99 3:19	TDR: 0171435
S69000		FILE: AAA00005151	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, PART WINDING START