

STAINLESS STEEL CLEAR COATED FLEXIBLE CONDUIT

Features:


- The addition of the PVC coated jacket extruded over a 316 stainless steel core, allows for greater resistance to a wide range of corrosion, oils, greases and contaminants
- The clear coating allows for visibility of the stainless core in the corrosive environment
- Interlock (double buckle) style
- Extremely flexible and durable, with smooth interior ease of installation and wire pull-through
- Approx. temperature rating of 0°F to 275°F (PVC Coating)
- Approved for damp locations when used with Calbrite Flex Connectors
- Manufactured in 25' coils

Certifications and Compliances:

- NEMA 4X approved

Applications:

Flexible stainless steel conduit can be used for protecting electronic and electrical wires and cable. Suitable for corrosive environments, including pumps, motors, HVAC systems, machine tools, electrical housings and cabinetry. Good absorption of motion and vibration.

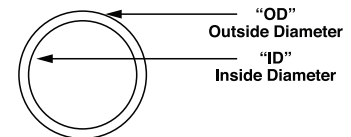

Double Buckle

Part Number	Trade Size (in)	Outside Diameter (in)	Inside Diameter (in)	Bend Radius (in)	Weight per 25' Coil (lb)
S60500CTCC	½	0.840	0.650	4½	6.25
S60700CTCC	¾	1.050	0.840	6	9.25
S61000CTCC	1	1.300	1.050	10	10.50
S61200CTCC	1¼	1.700	1.400	11	15.00
S61500CTCC	1½	1.900	1.620	12	17.00
S62000CTCC	2	2.400	2.000	14	23.00

All dimensions are for informational purposes only *Tolerances +/- 5%

