


Dimensional Drawing

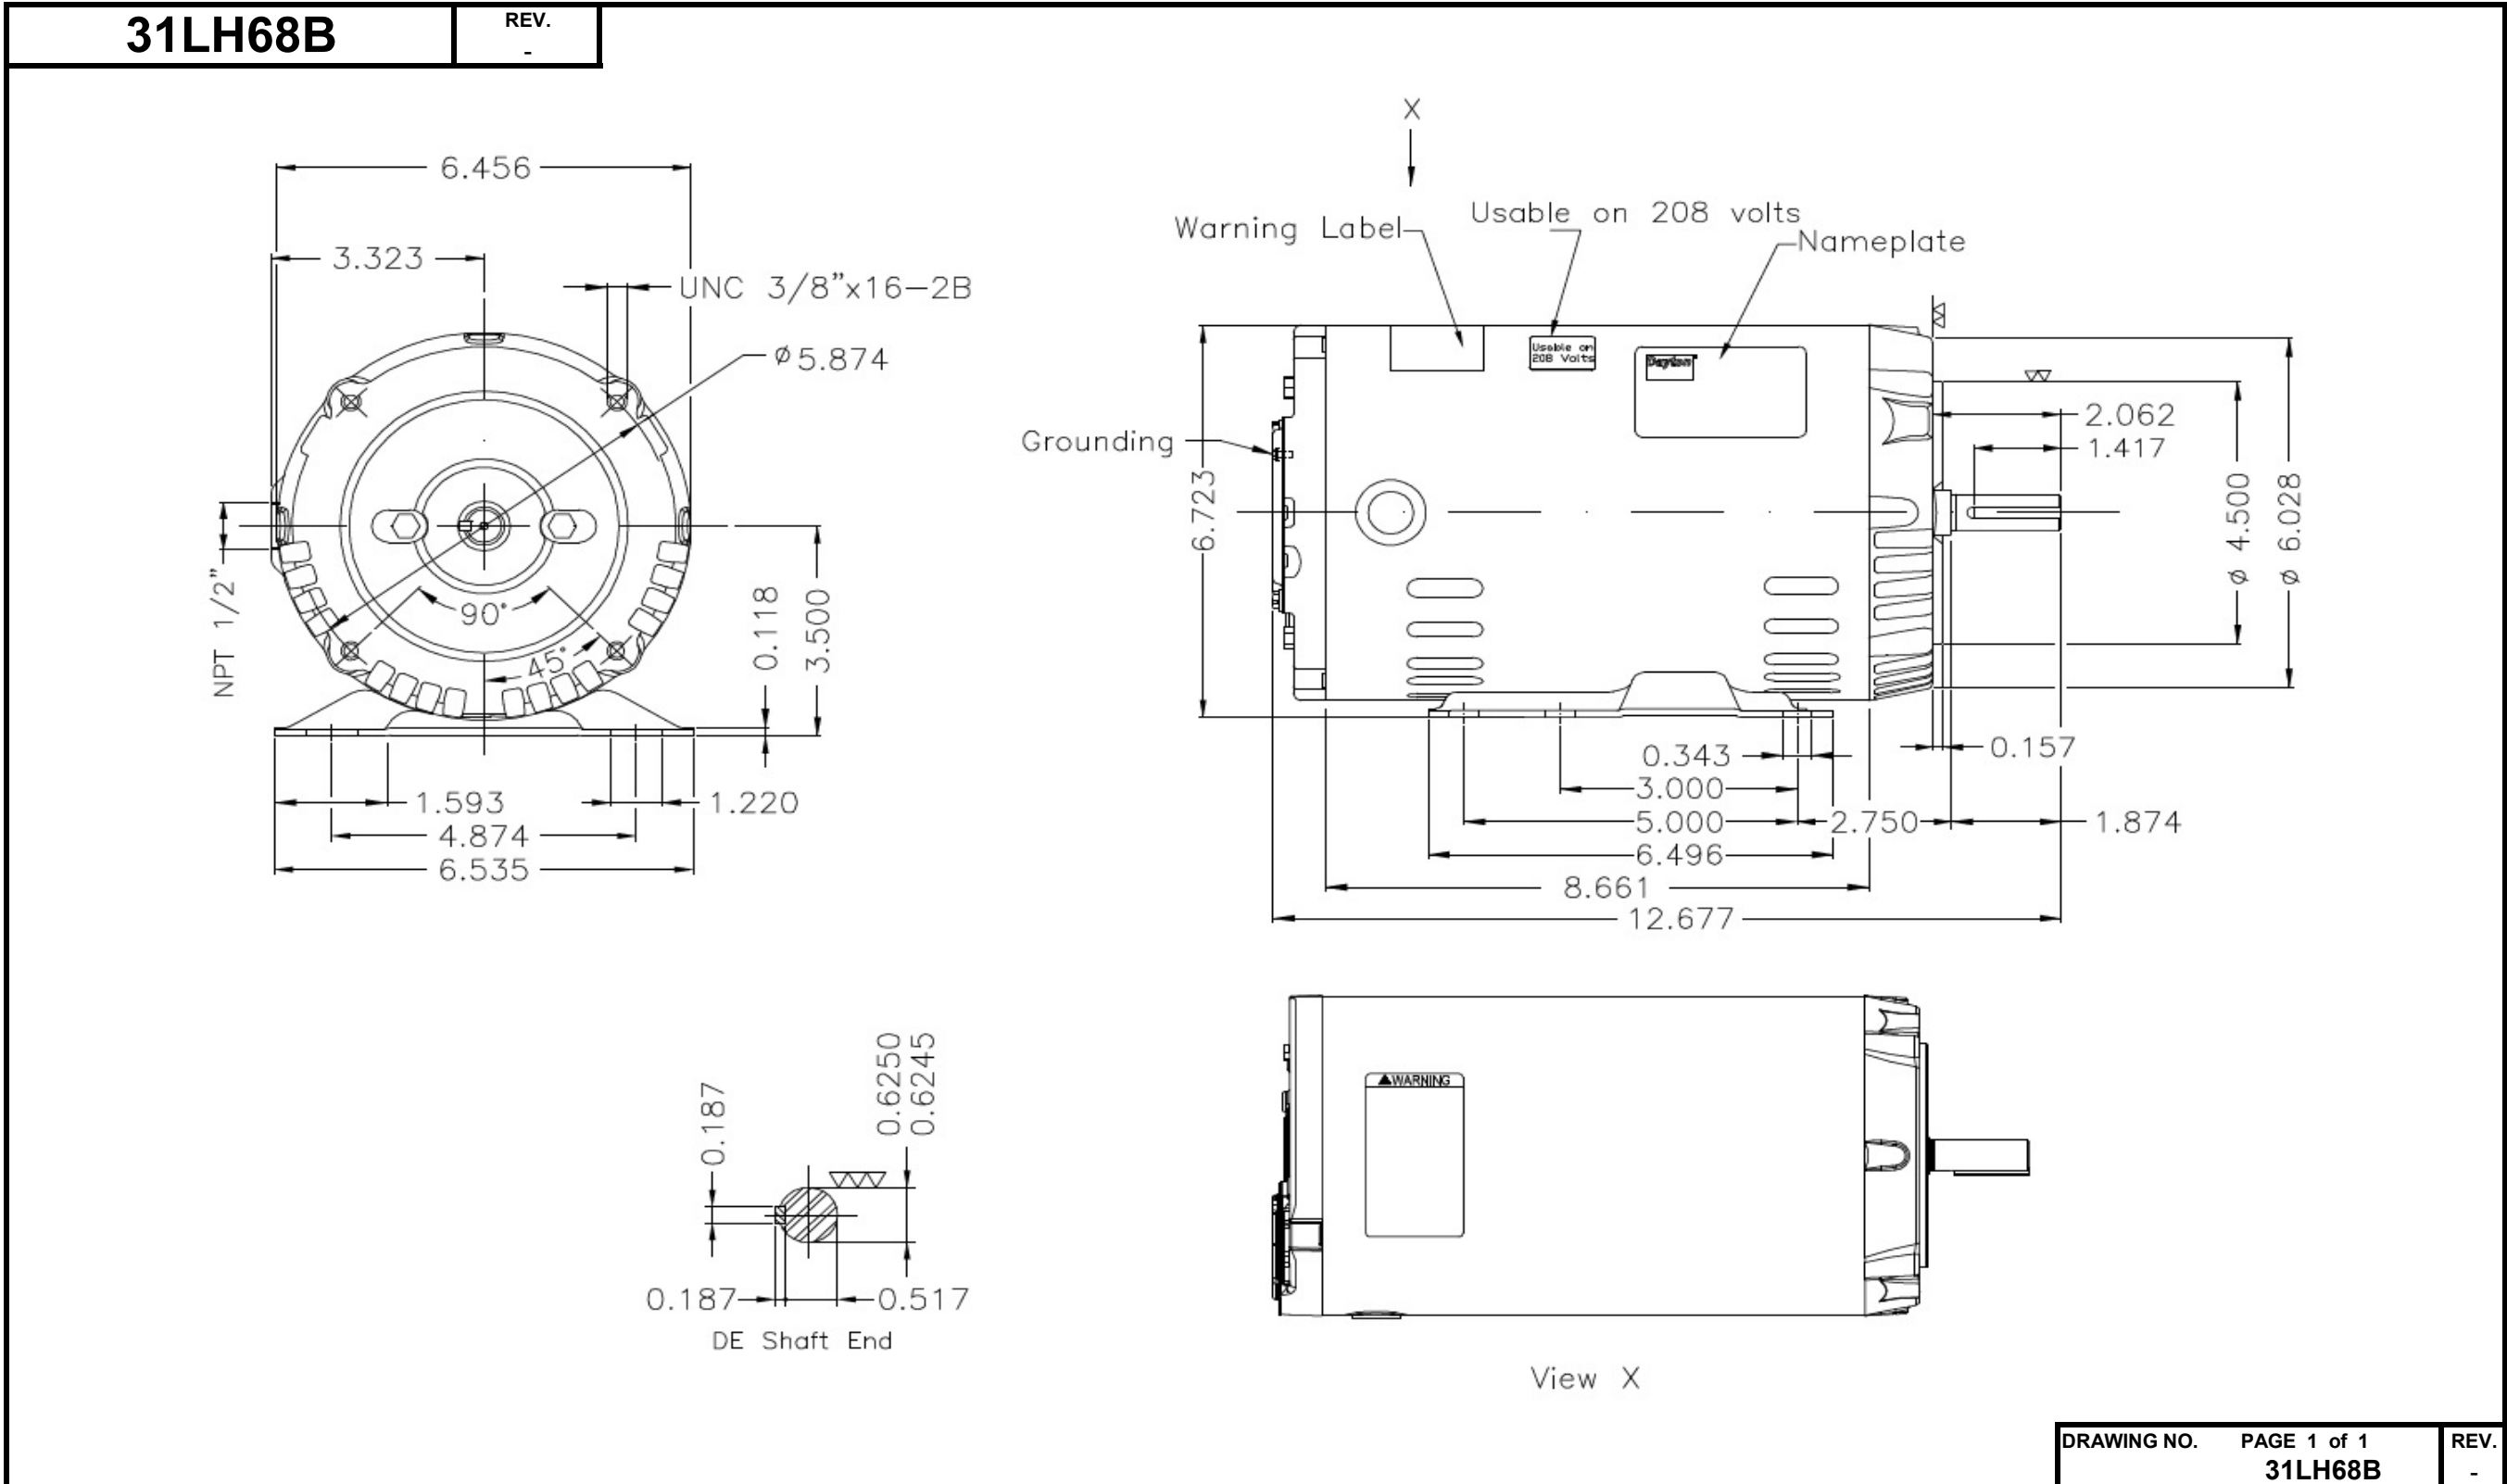

DRAWING NO.	PAGE 1 of 1	REV.
	31LH68B	-

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer

Product line : W01 - ODP - Premium Efficiency

Frame	: 56HC	Locked rotor time	: 14 s (hot) 25 s (cold)
Output	: 1.5 HP (1.1 kW)	Temperature rise ⁴	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l
Rated current	: 4.20/2.10 A	Cooling method	: IC01 - ODP
L. R. Amperes	: 37.0/18.5 A	Mounting	: F-1
LRC (p.u.)	: 8.8 Code L	Direct of rotation ¹	: Both
No load current	: 2.60/1.30 A	Noise level ²	: 52.0 dB(A)
Rated speed	: 1760 rpm	Starting method	: Direct On Line
Slip	: 2.22 %	Approx. weight ³	: 16.7 kg
Rated torque	: 6.07 Nm	Design	: B
Locked rotor torque	: 290 %		
Pull up torque	: 245 %		
Breakdown torque	: 350 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0055 kgm ²		

Output	Start	50%	75%	100%	Load type: -
Efficiency (%)	-	84.0	85.5	86.5	Load torque: -
Power factor	0.66	0.53	0.66	0.76	Load inertia (J=GD ² /4): -

	Drive end	Non drive end
Bearing type	6204-ZZ	6202-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Notes:

- * Dayton # 31LH68B
- * Connection YY/Y - Document 10003174687

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Tests	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancels the previous one, which must be eliminated.

- (1) When viewed from the drive end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At the rated point.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Summary of changes		Performed	Checked	Date
Performed by	mrsanchez			181288/2016-A	
Checked by	marian			Page	Revision
Date	07/02/2018			1/2	1


LOAD PERFORMANCE CURVE



Three Phase Induction Motor - Squirrel Cage

Customer

Product line : W01 - ODP - Premium Efficiency

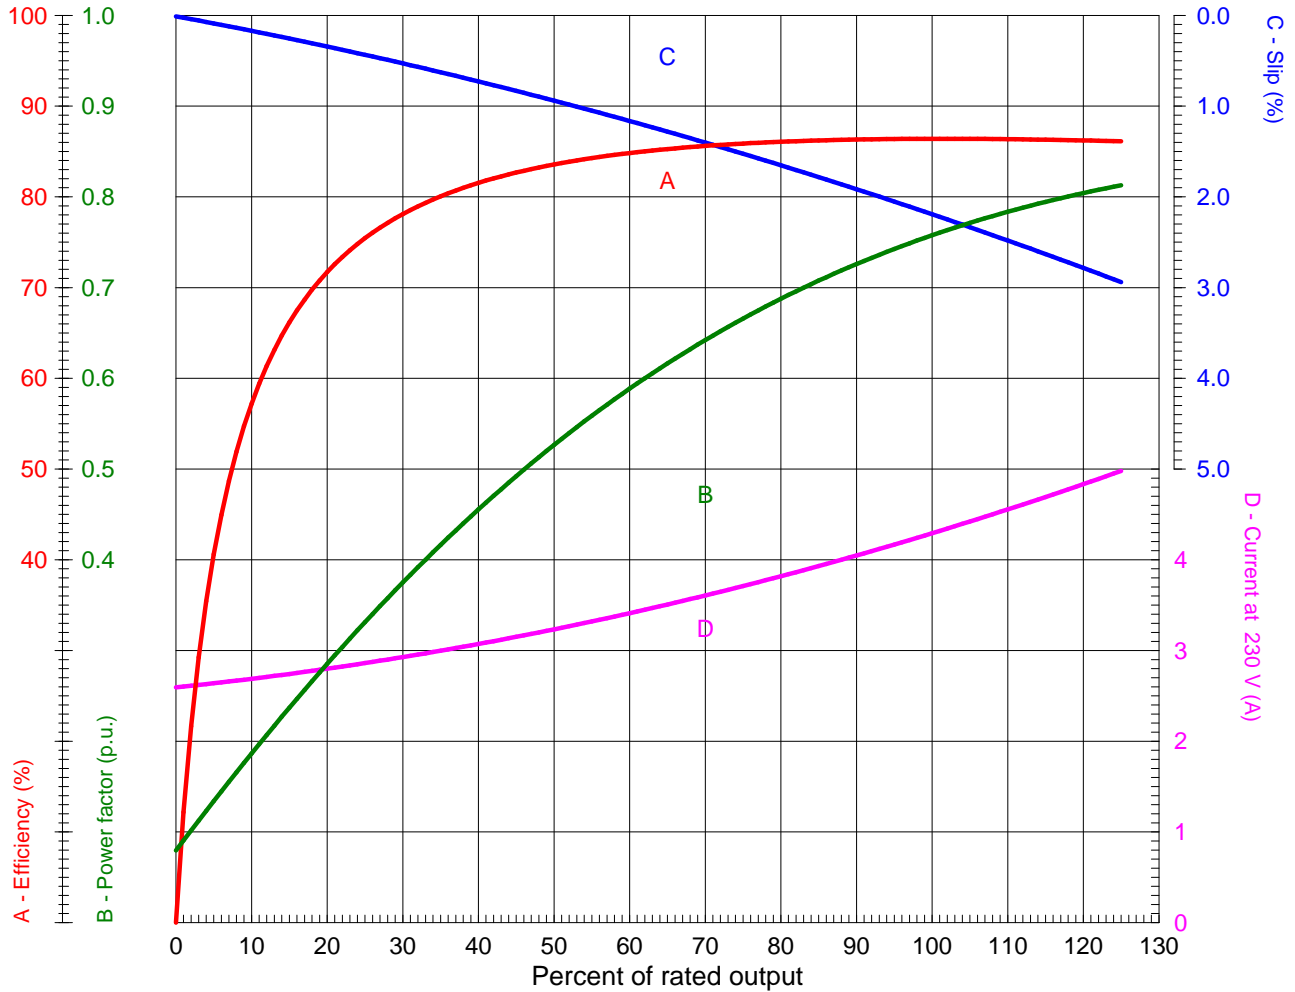

Performance : 1.5 HP (1.1 kW) 230/460 V 60 Hz 4P 56HC

Rated current	: 4.20/2.10 A	Moment of inertia (J)	: 0.0055 kgm ²
LRC (p.u.)	: 8.8 Code L	Duty cycle	: Cont.(S1)
Rated torque	: 6.07 Nm	Insulation class	: F
Locked rotor torque	: 290 %	Service factor	: 1.15
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1760 rpm	Design	: B

Rev.	Summary of changes	Performed	Checked	Date
Performed by	mrsanchez			181288/2016-A1
Checked by	marian			Page Revision
Date	07/02/2018			1/1 1


TORQUE AND CURRENT X SPEED CURVE



Three Phase Induction Motor - Squirrel Cage

Customer

Product line : W01 - ODP - Premium Efficiency

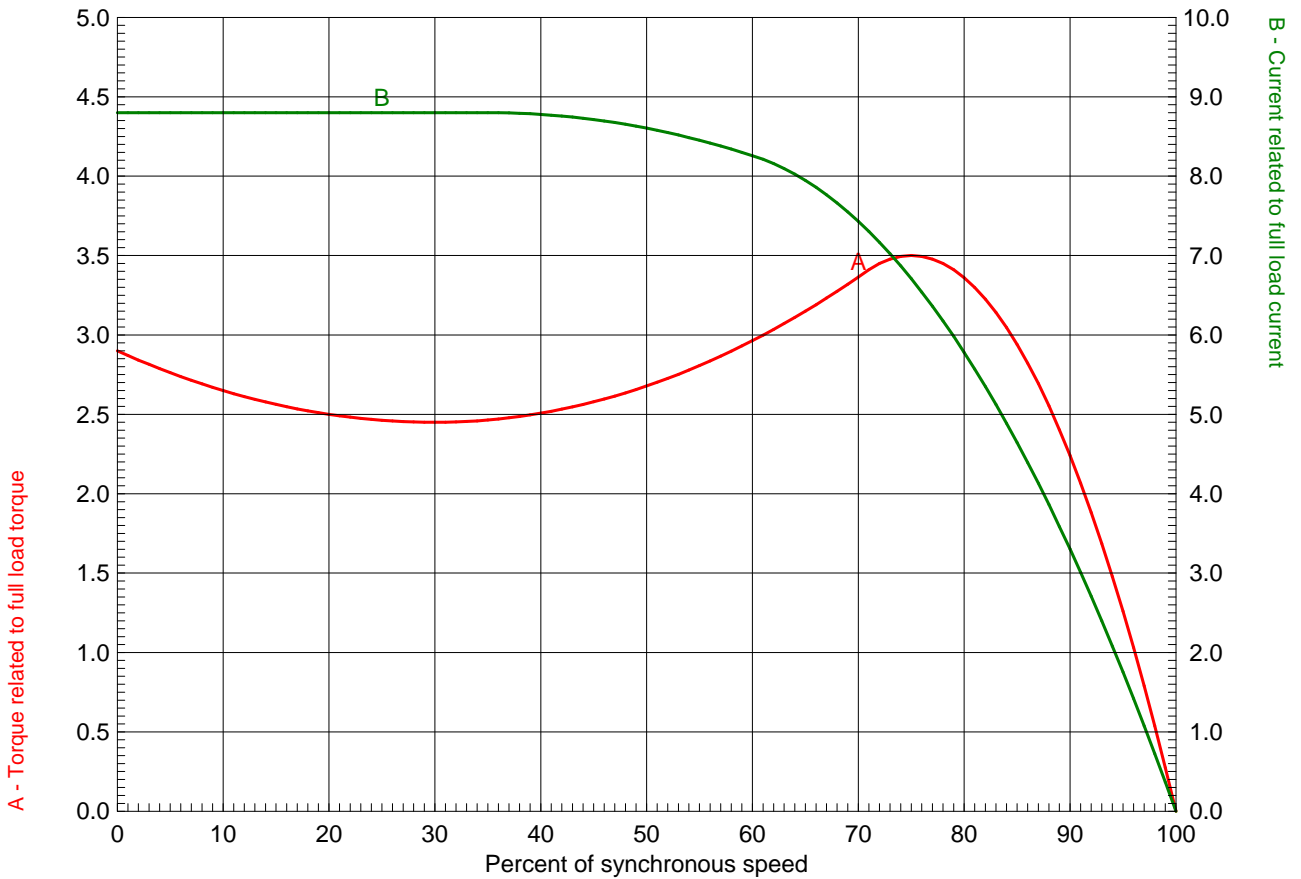

Performance : 1.5 HP (1.1 kW) 230/460 V 60 Hz 4P 56HC

Rated current : 4.20/2.10 A	Moment of inertia (J) : 0.0055 kgm ²
LRC (p.u.) : 8.8 Code L	Duty cycle : Cont.(S1)
Rated torque : 6.07 Nm	Insulation class : F
Locked rotor torque : 290 %	Service factor : 1.15
Breakdown torque : 350 %	Temperature rise : 80 K
Rated speed : 1760 rpm	Design : B

Locked rotor time 100% : 14 s (hot) 25 s (cold)
 Load inertia (J=GD²/4) : 0.0055 kgm²


Rev.	Summary of changes	Performed	Checked	Date
Performed by	mrsanchez			181288/2016-A1
Checked by	marian			Page Revision
Date	07/02/2018			1/1 1

Wiring Diagram




31LH68B


REV.
0

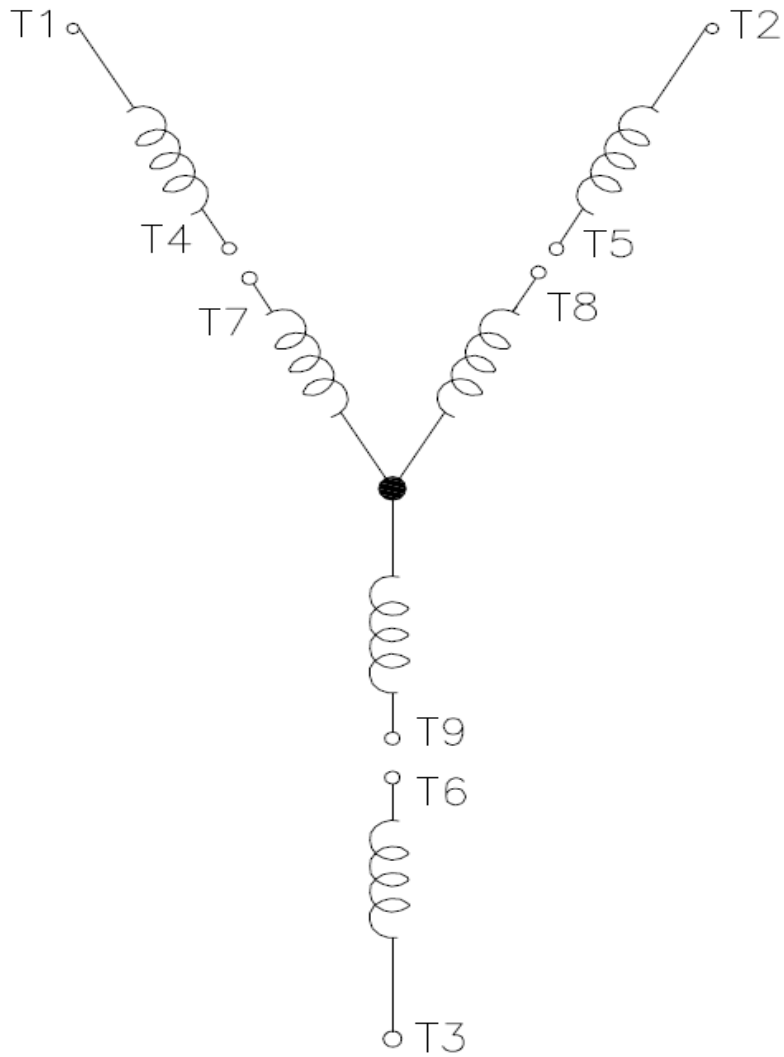

High Voltage (Y)

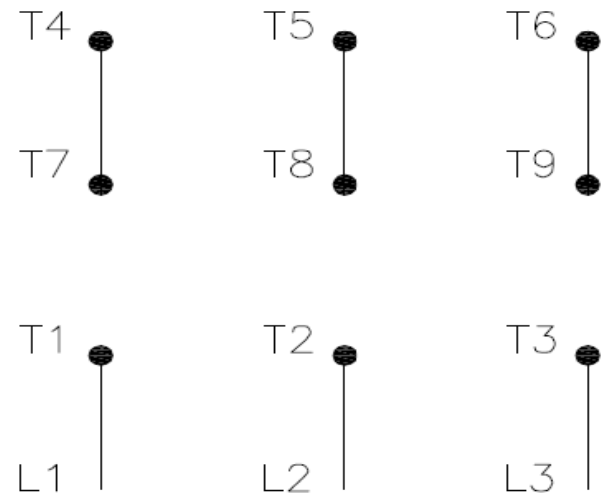

Low Voltage (YY)

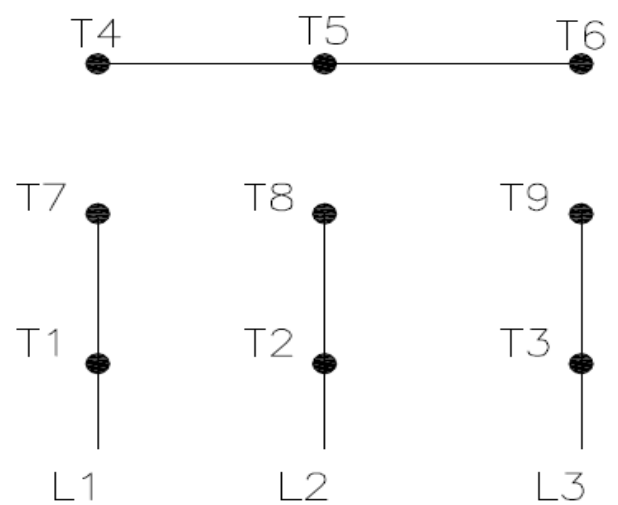

- T1 — Blue
- T2 — White
- T3 — Orange
- T4 — Yellow
- T5 — Black
- T6 — Gray
- T7 — Pink
- T8 — Red
- T9 — Brick Red

Interchange any two line wires to reverse rotation.

DRAWING NO.	PAGE 1 of 1	REV.
31LH68B		0

16MAR18

Dayton

MADE IN MEXICO

NEMA
Premium

MODEL NO.

UL US

CE


SA US

31LH68B

TO0IC0X0X0000300646

MAT: 13827830

PH 3	HP (kW)1.5(1.1)
HZ 60	V 230/460
RPM 1760	A 4.20/2.10
FR 56HC	DES B
IP 21	ENCL ODP
AMB 40 °C	CODE L
SF 1.15	INS F ΔT 80 K
SFA 4.8/2.4 A	PF 0.76
DUTY CONT	
AVG F.L. EFF.	86.5%

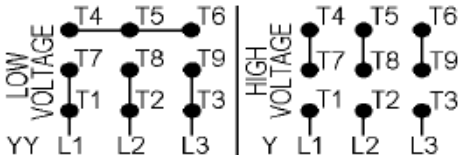

T1-BLU T2-WHT T3-ORG T4-YEL T5-BLK

T6-GRY T7-PNK T8-RED T9-BRK RED

INTERCHANGE ANY TWO LINE WIRES TO REVERSE ROTATION

ALT. RATING: 190-220/380-415V 50Hz
1.5HP 4.94-4.51/2.47-2.39 A 1445 RPM S.F.1.15

S/N:

Mfd. for Dayton Electric Mfg. Co., Lake Forest, IL 60045 USA