

McGill™ Momentary Contact Pushbutton Switches

NEC/CEC:
Listed for Ordinary Locations

Applications

- Single pole, high amperage – suitable for back panel applications.

Features

- Rugged switch mechanism ensures long life.
- Screw terminal.
- Mounting hardware consists of nickel plated hex nut and knurled nut.

Standard Materials

- Base: phenolic +150 °C (+302 °F)
- Bushing: nickel plated brass
- Push button: black plastic cap

NEC/CEC Certifications and Compliances

- UL Recognized Component
- UL File Number: E335442
- UL Standard: 1054, Guide WORY2
- CSA File Number: 249055
- CSA Standard: C22.2 No. 55
- RoHS Compliant




REELS AND SWITCHES: ORDINARY LOCATION SWITCHES

APPLETON OZ/GEDNEY

Circuitry			Poles	Ratings	Terminal Type	Catalog Number
A	B	C				
OFF	—	(ON)	SPST	15 Amp, 125 Vac 10 Amp, 250 Vac	Screw	100N

Dimensions in Millimeters (Inches)

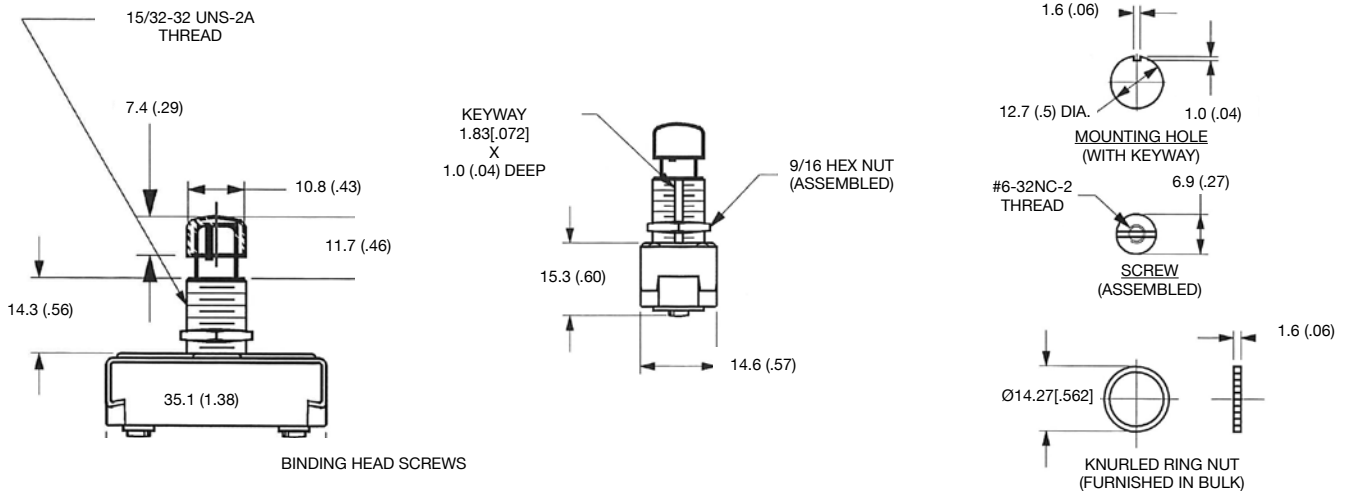

() Momentary.