


Product data sheet

Specifications

SQUARE D

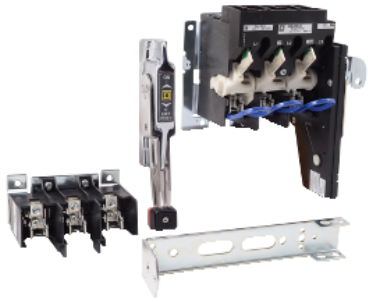

Operating mechanism, flange mounted, variable depth, 30A, 600 V, no fuse, switch mechanism, 6 inch handle, NEMA 4X

9422ATCN302

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 686.30 USD

Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Non-fusible disconnect switch

Complementary

Mounting Type	Flange rod variable depth
Current Rating	30 A
Horsepower Rating	7.5 hp 200 V AC 7.5 hp 230 V AC 15 hp 460 V AC 20 hp 575 V AC 5 hp 250 V DC
Handle Type	6 in handle included NEMA 4/4X enclosures Stainless Steel

Environment

Certifications	UL Recognized CSA
----------------	----------------------

Ordering and shipping details

Category	21732 - 9422
Discount Schedule	CP1
GTIN	00785901326526
Nbr. of units in pkg.	1
Package weight(Lbs)	13.96 lb(US) (6.331 kg)
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.00 in (5.08 cm)
Package 1 width	4.00 in (10.16 cm)

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Package 1 Length	9.00 in (22.86 cm)
------------------	--------------------

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
---------------------------	---

REACH Regulation	REACH Declaration
------------------	-----------------------------------

EU RoHS Directive	Compliant EU RoHS Declaration
-------------------	--

Mercury free	Yes
--------------	-----

RoHS exemption information	Yes
----------------------------	---------------------

China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
-----------------------	--

PVC free	Yes
----------	-----

Contractual warranty

Warranty	18 months
----------	-----------
