


Product data sheet

Specifications

SQUARE D

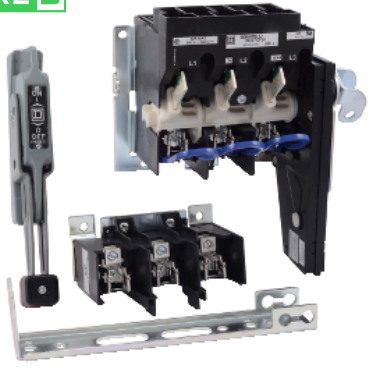

Operating mechanism, flange mounted, variable depth, 30A, 600 V, fuseholder, switch mechanism, 6 inch handle, NEMA 4

9422ATDF601

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 1,054.05 USD

Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

Complementary

Mounting Type	Flange rod variable depth
Current Rating	60 A
Horsepower Rating	15 hp 200 V AC 15 hp 230 V AC 30 hp 460 V AC 50 hp 575 V AC 10 hp 250 V DC
Fuse Rating	60 A 250 V 30 A 600 V
Handle Type	6 in handle included NEMA 1/3/3R/4 enclosures sheet steel
Fuse Type	H K J R

Environment

Certifications	UL Recognized CSA
----------------	----------------------

Ordering and shipping details

Category	21732 - 9422
Discount Schedule	CP1
GTIN	785901872184
Nbr. of units in pkg.	1
Package weight(Lbs)	14.56 lb(US) (6.606 kg)
Returnability	No
Country of origin	MX

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.00 in (5.08 cm)
Package 1 width	4.00 in (10.16 cm)
Package 1 Length	9.00 in (22.86 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------