


Square D™ QO™ and Homeline™ Load Centers and Enclosures

Catalog

1100CT0501
05/2023

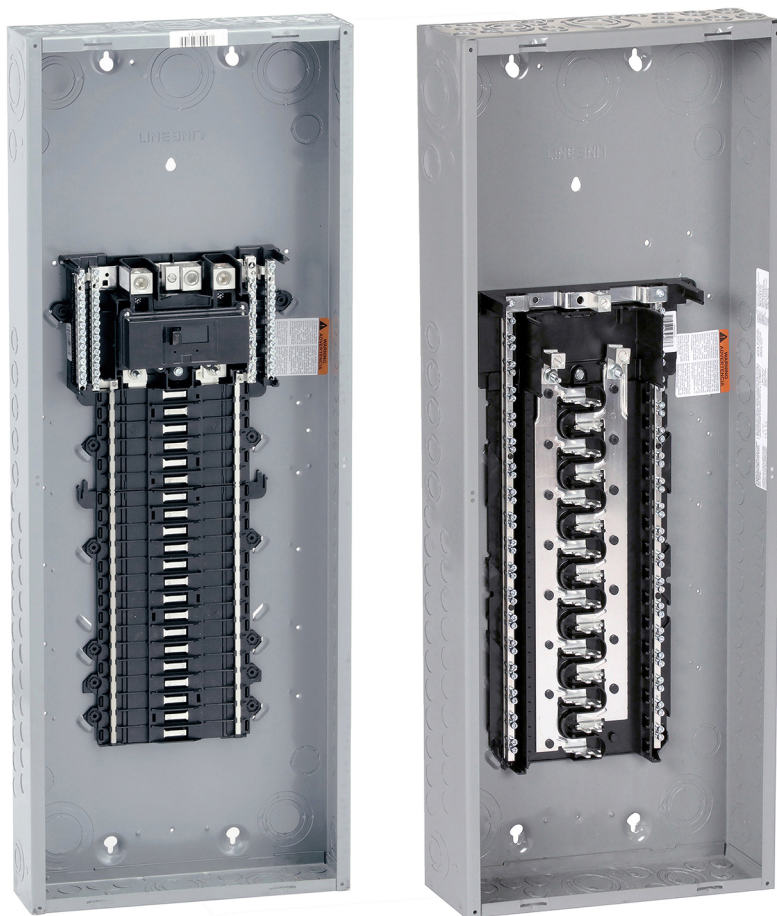

Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

Table of Contents

QO Load Centers	5
QO Product Description	5
Introduction to QO Load Centers	5
Catalog Number Guide — QO Load Centers	6
General Information	7
QO Indoor and Outdoor Load Centers	9
Indoor Enclosures (NEMA Type 1)	10
Outdoor Enclosures (NEMA Type 3R)	11
Fixed Mains vs. Convertible Mains — Single Phase	12
Fixed Mains vs. Convertible Mains — Three Phase	17
QO Plug-on Neutral Load Centers	19
QO Standard Load Centers	27
QO Label Samples	33
QO Wiring Diagrams	35
QO Value Packs, Mounting Bases and Covers	38
Plug-on Neutral Load Center Value Packs	39
QO Mounting Bases — UL Recognized Components	41
QO Load Center Covers	43
Homeline Load Centers	45
Homeline Product Description	45
Introduction to Homeline Load Centers	45
Catalog Number Guide — Homeline Load Centers	46
General Information	47
Homeline Indoor and Outdoor Load Centers	48
Indoor Enclosures (NEMA Type 1)	49
Outdoor Enclosures (NEMA Type 3R)	50
Fixed Mains vs. Convertible Mains — Single Phase	51
Technical Information	53
Homeline Label Samples	60
Homeline Wiring Diagrams	61
Homeline Value Packs and Covers	62
Plug-on Neutral Load Center Value Packs	63
Homeline Load Center Covers	66
QO/Homeline Load Centers	67
QO vs. Homeline Load Centers	67
QO/Homeline Enclosure Dimensions and Knockout Information	67
QO/Homeline Bolt-On Hubs	71
QO/Homeline Accessories	72
QO/Homeline Surge Protective Devices (SPD)	78
Enclosed Devices	81
Product Description	82
Enclosures	83
Indoor Enclosures	83
Rainproof Enclosures	83
Service Entrance Devices	84
Non-Service Entrance Devices	85

QO Load Centers

QO Product Description


Introduction to QO Load Centers

QO Load Centers are built on the Square D reputation for reliability, innovation, and leadership in circuit protection.

QO Load Centers from Square D are Underwriters Laboratories® (UL®) Listed panelboards. They are designed to meet residential, commercial, and industrial requirements to help protect electrical systems, equipment, and people.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead compounds, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

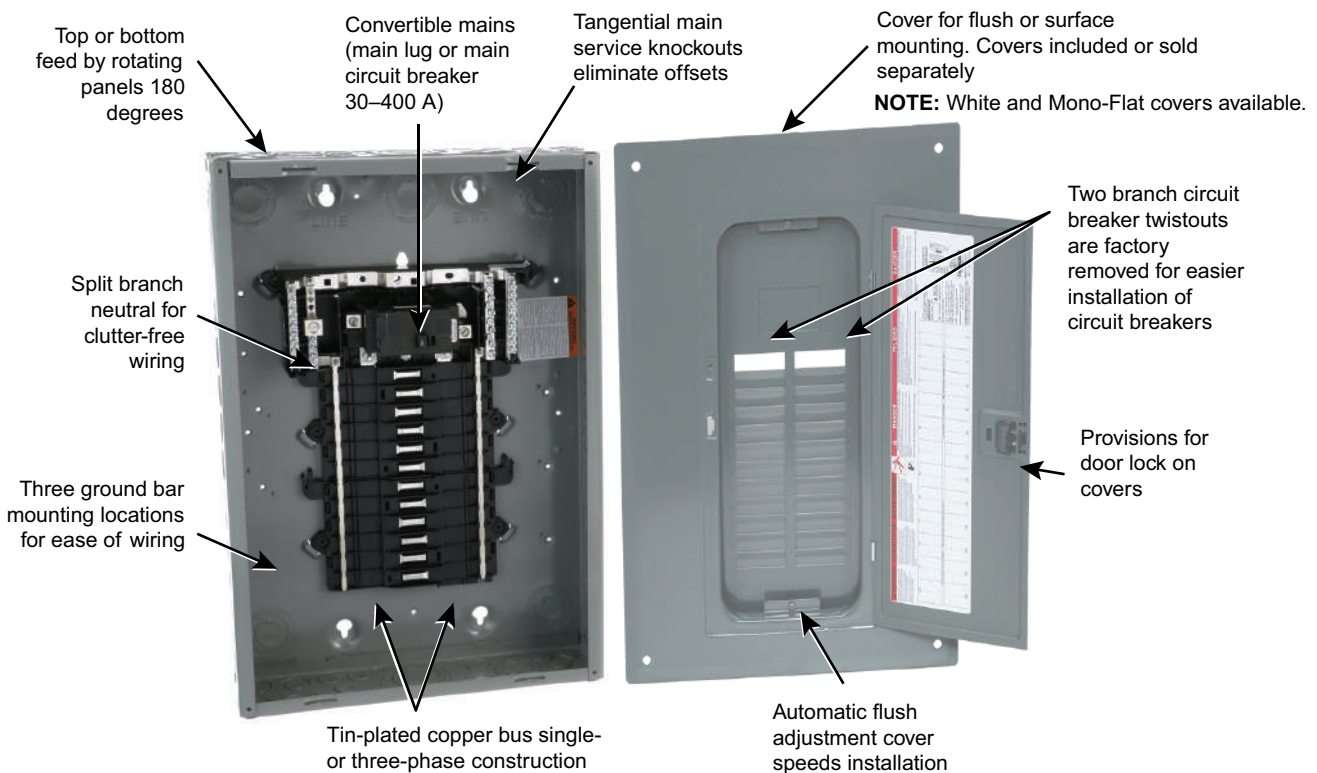

Other Features:

- **QO 3/4-inch format:** this space-saving feature saves wire.
- **Backed out neutral screws:** save labor and installation time.
- **Convertible Mains:** allows fast field conversion between main circuit breaker and main lugs to meet changing job requirements.
- **Standard 22 kA / 10 kA AIR SCCR:** standard short-circuit series rating for all main circuit breaker Load Centers provides increased application capability. Main circuit breaker 22 kA / Main lugs or branch circuit breakers 10–65 kA.
- **3-phase:** QO three-phase main circuit breaker panels can be field upgraded to provide up to 100,000 A series connected short circuit current ratings (SCCR).
- **Interior:** single, captive interior mounting screw retained by the interior. Interior mounts can be removed during rough-in for pain or theft protection.
- **Screws:** combination slot / square-drive neutral, ground and cover screw accommodate both standard flat blade screw drivers and square-head drivers.

Catalog Number Guide — QO Load Centers

Figure 1 - QO Load Centers Catalog Number Guide



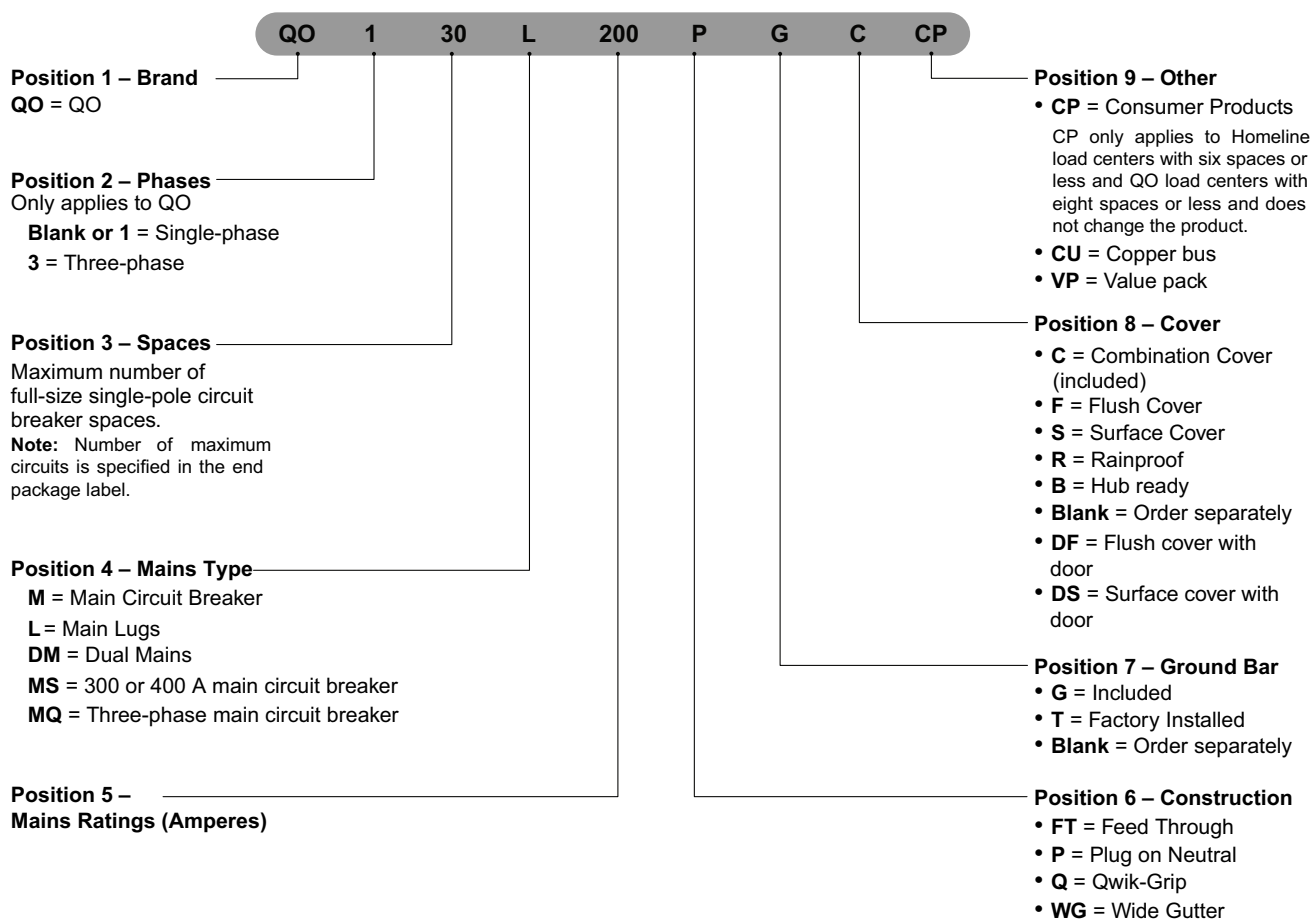


Figure 2 - QO Circuit Breakers Catalog Number Guide

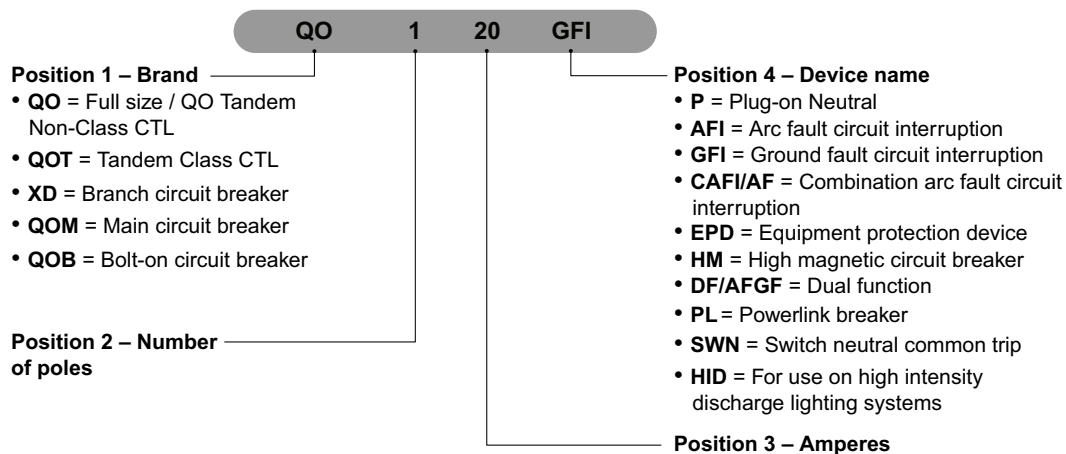

General Information

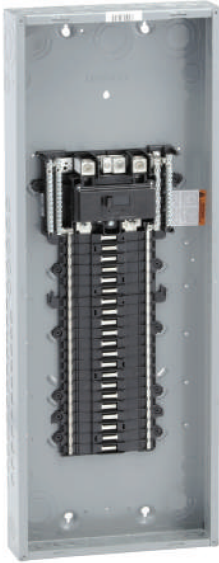

QO142M200P



QO330L200G

Type

Circuit breaker load centers for use on electrical systems are UL Listed under File E-6294 (panelboards) and meet Federal Specifications W-P-115c, Type 1, Class 2 for use in government housing. Select from QO, QOT (non-CTL), QO-PL, QO-GFI (UL Class A ground fault protection), QO-AFI (arc fault circuit interrupter), QO-CAFI (combination arc fault interrupter), or QO-EPD (30 mA equipment ground fault protection) branch circuit breakers.

Neutral Assemblies

Branch neutral terminals suitable for one #14–4 AWG copper or one #12–4 AWG aluminum wire

Two or three #14-1/0 AWG copper or #12–1/0 AWG aluminum terminals provided on 12–42 circuits, 100–225 A load centers

Suitable lugs provided on the neutrals for termination of the grounding conductor

All unused neutral terminals may be used to terminate bare or green equipment grounding conductors when the load center is used as service equipment:

- one #14–4 AWG copper
- one #12–4 AWG aluminum
- two or three #14–10 AWG copper
- two or three #12–10 AWG aluminum

Ratings

Single-Phase

Main lugs: 30–400 A

Main circuit breaker: 100–400 A three-phase

Main lugs: 60–225 A

Main circuit breaker: 100–225 A

UL Listed

- File E-6294 (panelboards)
- UL 67 standard enhances safety in electrical distribution panels suitable for use as service equipment
- Suitable for use with 75°C copper or aluminum main conductors

Class CTL

UL Listed Class CTL load centers meets the 2020 National Electrical Code® (NEC®) article for lighting and appliance branch circuit panelboards.

NOTE: Only applicable on non-plug on neutral load centers.

Service

120 Vac, 1Ø2W

120/240 Vac, 1Ø3W

240 Vac, 1Ø3W

208Y/120 Vac, 3Ø4W

240/120 Vac delta, 3Ø4W

240 Vac corner grounded delta, 3Ø3W

48 Vdc maximum (1Øconvertible main lug 12–42 circuit only)

Line Lugs

All lugs suitable for 75°C copper or aluminum wires.

Main lugs and main circuit breaker load centers have wire binding screw torque values on the wiring diagrams and circuit breaker labels.

Phasing

Load centers have distributed phase bussing.

Most branch circuit breakers can be mounted in any position.

Table 1 - Branch Circuit Breakers




10,000 AIR	
QO	1-pole, 10–70 A 2-pole, 10–200 A 3-pole, 10–100 A
QOT (Tandems Non-CTL)	1-pole, 15–20 A
QO-EPD	1-pole, 15–30 A 2-pole, 15–60 A
QO-GFI	1-pole, 15–30 A 2-pole, 15–60 A
QO-AFI	1-pole, 15–20 A
QO-CAFI	1-pole, 15–20 A
QO-HID	1-pole, 15–50 A 2-pole, 15–50 A 3-pole, 15–30 A
QO-PL QO-PLILC	1-pole, 10–20 A, 30 A 2-pole, 10–60 A 3-pole, 15–60 A
QO-SWN	2-pole, 10–50 A 3-pole, 10–50 A
22,000 AIR	
QO-VHGFI	1-pole, 15–30 A
QO-VH	1-pole, 15–30 A 2-pole, 15–200 A 3-pole, 15–100 A
QOB-VH	2-pole, 150 A ¹ 3-pole, 110–150 A ¹
42,000 AIR	
QOH	2-pole, 40–125 A
65,000 AIR	
QH	1-pole, 15–30 A 2-pole, 15–30 A 3-pole, 15–30 A

1. For use with 300 A and 400 A load centers only. Requires PK3CA mounting kit, ordered separately.

QO Indoor and Outdoor Load Centers

NEMA Type 1 — Indoor

NEMA 1 enclosures are typically used for protecting controls and terminations from objects and personnel. This style of enclosure, while offering a latching door, does not have a gasketed sealing surface. NEMA 1 enclosures are used in applications where sealing out dust, oil, and water is not required.

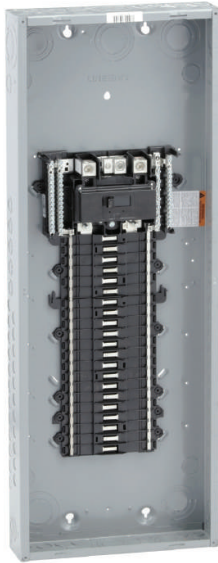

NEMA Type 3R — Rainproof

NEMA 3R enclosures are typically used in outdoor applications for wiring and junction boxes. This style of enclosure provides protection against falling rain, sleet, snow, and external ice formation. In an indoor application, they protect against dripping water. This style of enclosure does not have a gasketed sealing surface. Some models have hasps for padlocking.



Indoor Enclosures (NEMA Type 1)



QO Plug-on Neutral

QO plug-on neutral load centers offer time-savings for plug-on neutral combination arc fault (CAFI) and dual function circuit breaker installation. Our innovative, split neutrals are designed to save you time and wire, allowing plug-on neutral circuit breakers to connect directly to the neutral bar without the pigtail.



Qwik-Grip wire management system available

Save time and simplify your work by eliminating knockouts, installing wire connectors and blindly pulling wire into the load center.



Material, Finish and Knockouts

Our enclosures are from sheet steel with knockouts at top, bottom, back and sides. Finish consists of gray baked enamel electrodeposited over cleaned, phosphatized steel. Most 100–225 A indoor enclosures are 14.25 in. (362 mm) wide and 300–400 A indoor enclosures are 20 in. (508 mm) wide. QO enclosures can be rotated to allow top or bottom feed. QO load center interiors have shielded tin plated copper bus bars to ensure superior performance and durability.



Flush and Surface Covers

Indoor QO covers with latch are available in surface or flush mount and are included with our load centers or purchased separately. Doors to cover circuit breaker handles, except on 2–4, 4–8 and 6–12 circuit models. Triple lead cover screws for fast cover installation.



Automatic Flush Adjustment

QO flush covers feature a floating, spring-mounted trim providing automatic adjustment. This ensures proper alignment without manual adjustment and speeds up the final installation.



Filler Plates

Snap-in style filler plates are accessories purchased separately available to cover unused spaces. HOMFP and QOFP filler plates available for branch circuit breaker spaces in all of our covers. QOM1FP filler plates available for 100–125 A convertible load center covers. QOM2FP filler plates available for 150–225 A convertible load center covers.



Different Colors and Styles

QO covers are available in gray and white colors. Mono-Flat covers, a high-end alternative with aesthetically pleasing design and low profile surface with concealed mounting screws and door hinges are available as an alternative to our standard covers.

Outdoor Enclosures (NEMA Type 3R)




QO Plug-on Neutral

QO plug-on neutral load centers offer time-savings for plug-on neutral combination arc fault (CAFI) and dual function circuit breaker installation. Our innovative, split neutrals are designed to save you time and wire, allowing plug-on neutral circuit breakers to connect directly to the neutral bar without the pigtail.



Material, finish and knockouts

Galvanized steel enclosure includes interior trim and door with a gray baked enamel electrodeposited over cleaned, phosphatized steel. QO load center interiors have tin plated copper bus bars.



Stainless steel latch

A stainless steel door latch on the enclosure provides closure and maximum durability.



Wiring access without door removal

Convertible main panels are side-hinge door devices, providing full wiring access without door removal.



Bolt-on hubs

NEMA Type 3R devices have provisions for interchangeable bolt-on hub. Square D type rain-tight bolted hubs provide fast and convenient top feed conduit connection. Hubs are available for 0.75 in. (19 mm) to 4 in. (102 mm) conduit size. No gasket is required with hubs from 0.75 in. (19 mm) to 2.50 in. (64 mm) when used on NEMA Type 3R load centers.

Fixed Mains vs. Convertible Mains — Single Phase

Table 2 - Single-Phase — QO Load Centers, Fixed Mains 30–125 A



Indoor NEMA 1	Rainproof NEMA 3R
Fixed Mains (30–125 A)	
	
Standards	
UL 67 Listed <ul style="list-style-type: none"> • File E-6294 • Suitable for use as service equipment in select models • 75°C wire rating 	
Short Circuit Current Rating	
UL short circuit rating depends on lowest interrupting rating of circuit breaker installed.	
Interior	
<ul style="list-style-type: none"> • Tin plated aluminum bus • Tin plated copper bus is an available option on 6–12 and 8–16 circuit load centers • Tin plated copper bus is standard on 4–8 circuit load centers 	
Mains	
<ul style="list-style-type: none"> • Factory-installed main lugs • Top mains positioning only • Top or bottom feed • A backfed main circuit breaker can be field installed in 4–8, 6–12, and 8–16 load centers using PK2MBretaining kit 	
Covers	
Combination flush and surface cover	Cover included
Main Lug Kits	
Not applicable	
Main Circuit Breaker Kits	
Not applicable	
Field-Installable Main Circuit Breaker	
Not Applicable	

Table 3 - Single-Phase — QO Load Centers, Convertible Mains 100–225 A



Convertible Mains (100–225 A)		
		
Standards		
UL 67 Listed <ul style="list-style-type: none"> • File E-6294 • Suitable for use as service equipment • 75°C wire rating 		
Short Circuit Current Rating		
<ul style="list-style-type: none"> • Main lugs: up to 65,000 AIR (depends on lowest interrupting rating of branch circuit breakers installed) • Main circuit breaker: 22,000 AIR standard • 22,000 AIR main circuit breaker kits 		
Interior		
<ul style="list-style-type: none"> • Shielded, one-piece tin plated copper bus • Removable interior with single, captive mounting screw • Split branch neutral with up to 50% more terminations than required • Multiple mounting locations for equipment grounding bar kits: left, right, and bottom • Main lugs Load Centers have equipment grounding bar kits included (not factory-installed) 		
Mains		
Factory-installed main lugs convertible to main circuit breaker		
Load Center Amperage	Main Circuit Breaker Kit (A)	
125	50–125	
150	100–150	
200	100–200	
225	100–225	
Factory-installed main circuit breaker convertible to main lugs		
Main Circuit Breaker	Main Lug Kit	Load Center (A)
100	125	100
125	125	125
150	225	150
200	225	200
225	225	225
Covers		
<ul style="list-style-type: none"> • Available in surface or flush mount and are included or purchased separately. • Flush covers have spring loaded interior trim for automatic flush adjustment. • Easy to open latch 		Cover included
Main Lug Kits		
<ul style="list-style-type: none"> • Field-installable in main circuit breaker or main lugs load centers • QOL125kit for use in 100–125 A load centers • QOL225kit for use in 150–225 A load centers 		
Main Circuit Breaker Kits		
<ul style="list-style-type: none"> • Field-installable in main lugs or main circuit breaker load centers • 50–225 A main circuit breaker kit is 22,000 AIR series rated with 10,000 AIR branch circuit breakers 		

Table 3 - Single-Phase — QO Load Centers, Convertible Mains 100–225 A (Continued)

Convertible Mains (100–225 A)				
Field-Installable Main Circuit Breaker				
Main Circuit Breaker Rating ²	Load Center Mains Rating	22,000 AIR Main Circuit Breaker	Lug Wire Size AWG/kcmil Al or Cu ³	Lug Torque (lb-in. / N•m)
QOM1 Frame Size				
50	100–125 A	QOM50VH	#6–2/0	50 lb-in. (6 N•m)
60	100–125 A	QOM60VH		
70	100–125 A	QOM70VH		
80	100–125 A	QOM80VH		
90	100–125 A	QOM90VH		
100	100–125 A	QOM100VH		
110	125 A	QOM110VH		
125	125 A	QOM125VH		
QOM2 Frame Size ^{4, 5}				
100	150–225 A	QOM2100VH	#4–250 Cu #4–300 Al	250 lb-in. (28 N•m)
125	150–225 A	QOM2125VH		
150	150–225 A	QOM2150VH		
175	200–225 A	QOM2175VH		
200	200–225 A	QOM2200VH		
225	225 A	QOM2225VH		

2. Do not exceed the load center mains rating.
 3. Wire range listed for QOM circuit breaker kits is the wire range of that circuit breaker. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in the load center tables.
 4. Add suffix 1021 for shunt trip.
 5. Add suffix 8041 for control wire taps.

Single-Phase — QO Load Centers, Fixed Mains 300–400 A

Standards

UL Listed

- File E-6294
- Suitable for use as service equipment
- 75°C wire rating

Short circuit current rating

- Main lugs: up to 65,000 AIR
- Main circuit breaker: 42,000 AIR fully rated

Interior

- Available in single-phase construction
- Interiors accept QO and QOB-VH 110–150 A maximum circuit breakers (QOB-VH circuit breakers require connector kit PK3CA)
- Tin plated aluminum bus
- Available in single-phase construction
- Tin plated copper connector fingers
- Neutral assemblies positioned opposite the mains compartment

Mains

- Factory-installed main lugs and main circuit breaker
- Multiple wire terminals for phases and neutral
- Top or bottom mains positioning

Covers

Flush and surface covers sold separately

Enclosures

- 20 in. (508 mm) wide galvanized steel
- Embossed 0.25 in. (6 mm) standoffs
- End walls, one blank and one with knockouts, are standard; both are removable and interchangeable
- Embossed keyholes centered at both ends and in visual positioning
- Multiple grounding bar mounting locations
- Wire management braces



QONQ30LS400
(interior)



NC50NQVF



MH50

Single-Phase – QO Load Centers, Special Purpose



QO124L125PGC



QO24L60NRNM



QO1612M125FTRB



QO1DM10050TRBR



QO130L125PWG

Special Purposes – Recreational vehicle and manufactured housing load centers

- UL Listed (File E-6294)
- Single-phase, 2- and 3-wire
- Covers included with load centers

Load centers with covers

- Combination flush/surface cover included with load centers
- Equipment grounding bar included on main lug load centers
- Top or bottom feed on incoming service by rotating complete load center 180 degrees
- Convertible main load centers

Non-metallic load center

- UL Listed and suitable for use as service equipment
- Side-hinge door device
- 10,000 AIR rating
- Single-phase, 2- and 3-wire
- Factory-installed grounding bar
- Cover included with load center
- Knockouts in bottom endwall, side and back

Generator panel manual transfer

- Connects utility and standby power to installed branch circuits
- Includes two factory-installed two-pole main circuit breakers tied together with a mechanical interlock.
- 30 A and 60 A main circuit breaker versions
- Supply up to eight branch circuits using tandem circuit breakers
- Available indoor enclosure only
- Cover with door included

Riser panels

- Offset interior provides ample wire gutter space for high rise applications.
- Factory-installed main lugs (125 A), convertible to main circuit breaker with standard QOC cover and optional Mono-Flat cover.
- Factory-installed main lugs (200 A), convertible to main circuit breaker when used with QOC cover only.
- Indoor only, available in 12 to 40 circuits
- Optional Mono-Flat cover available for both 125 A and 200 A panels (sold separately).

Fixed Mains vs. Convertible Mains — Three Phase

Table 4 - Three-Phase — QO Load Centers, Fixed Mains (60–225 A)

Indoor NEMA 1	Rainproof NEMA 3R
Standards	
UL Listed <ul style="list-style-type: none"> • File E-6294 • Suitable for use as service equipment • 75°C wire rating 	
Short Circuit Current Rating	
<ul style="list-style-type: none"> • Main lugs: up to 65,000 AIR (depends on lowest interrupting rating of branch circuit breakers installed) • Main circuit breaker up to 100 A: 22,000 AIR standard 	
Interior	
<ul style="list-style-type: none"> • Shielded, on-piece tin plated copper bus on 100–225 A • Removable interior with single, captive mounting screw on 100–225 A (indoor only) • Main lugs load centers have equipment grounding bar kits included (not factory-installed) 	
Mains	
<ul style="list-style-type: none"> • Factory-installed main lugs • Main neutral terminal located next to the phase terminals on 125–225 A main circuit breaker devices • Top or bottom feed 	
Covers	
<ul style="list-style-type: none"> • Flush and surface covers sold separately • Flush covers have spring-loaded interior trim for automatic flush adjustment • Easy to open door latch 	Cover included
Branch Neutral Termination	
<ul style="list-style-type: none"> • Suitable for copper or aluminum wire • Terminals suitable for #14–#4 AWG copper or one #12–#4 AWG aluminum wire • Positioned on both sides of the mains compartment • Slot/square drive wire binding screws • Three (3) #14–1/0 AWG copper or #12–#6 AWG aluminum terminations standard on 12–42 circuits, 100–225 A load centers 	
Main Circuit Breaker Kits	
Not applicable	


Table 5 - Three-Phase — QO Load Centers, Convertible Mains (100–225 A)

Indoor NEMA 1		Rainproof NEMA 3R	
Standards			
UL Listed <ul style="list-style-type: none"> • File E-6294 • Suitable for use as service equipment • 75°C wire rating 			
Short Circuit Current Rating			
<ul style="list-style-type: none"> • Main lugs: up to 65,000 AIR (depends on lowest interrupting rating of branch circuit breakers installed) • Main circuit breaker up to 100 A: 22,000 AIR standard • Main circuit breaker 125–225 A: 25,000 AIR standard; optional for field installation up to 65,000 AIR for 70–225 A main circuit breakers 			
Interior			
<ul style="list-style-type: none"> • Shielded, one-piece tin plated copper bus on 100–225 A • Removable interior with single, captive mounting screw on 100–225 A (indoor only) • Main lugs load centers have equipment grounding bar kits included (not factory-installed) 			
Mains			
<ul style="list-style-type: none"> • Factory-installed main circuit breaker • Main neutral terminal located next to the phase terminals on 125–225 A main circuit breaker devices • Top or bottom feed • Fully convertible from main circuit breaker to main lugs (100–225 A) 			
Covers			
<ul style="list-style-type: none"> • Flush and surface covers sold separately • Flush covers have spring-loaded interior trim for automatic flush adjustment • Easy to open door latch 	Cover included		
Branch Neutral Termination			
<ul style="list-style-type: none"> • Suitable for copper or aluminum wire • Terminals suitable for #14–#4 AWG copper or one #12–#4 AWG aluminum wire • Positioned on both sides of the mains compartment • Slot / square drive wire binding screws • Three (3) #14–1/0 AWG copper or #12–#6 AWG aluminum terminations standard on 12–42 circuits, 100–225 A load centers 			
Main Circuit Breaker Kits			
<ul style="list-style-type: none"> • Field-installable in main circuit breaker load centers • 100–225 A main circuit breakers are series rated up to 100,000 AIR (see table below) with 10,000 AIR branch circuit breakers in 30 circuit or larger main circuit breaker load centers with optional QJL main circuit breaker • Electrical accessories are not available on QDL, QGL, or QJL circuit breakers • 30–42 circuit, 125–225 A main circuit breaker load centers include integral QDL circuit breakers. Optional QGL and QJL circuit breakers available as shown: 			
Amperage	25,000 AIR	65,000 AIR Main Circuit Breaker	100,000 AIR ⁶
70	QDL32070	QGL32070	QJL32070
80	QDL32080	QGL32080	QJL32080
90	QDL32090	QGL32090	QJL32090
100	QDL32100	QGL32100	QJL32100
110	QDL32110	QGL32110	QJL32110
125	QDL32125	QGL32125	QJL32125
150	QDL32150	QGL32150	QJL32150
175	QDL32175	QGL32175	QJL32175
200	QDL32200	QGL32200	QJL32200
225	QDL32225	QGL32225	QJL32225

6. When these 3–pole circuit breakers are used as the main circuit breaker of a three-phase load center, the maximum AIR rating is 65,000 at 240 Vac and 100,000 at 208 Vac.

QO Plug-on Neutral Load Centers

Indoor, QO Convertible Mains (125–225 A), 1Ø — Main Lugs



QO120L125PG



QO130L200PG



QO154L225PG

Table 6 - Plug-on Neutral Load Center Main Lugs, Convertible Mains (1Ø3W–120/240 Vac Indoor—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ⁷	Max. Tandem Circuit Breakers	Load Center box and Interior	Load Center Covers (Order Separately)		Al	Cu	Equipment Ground Bar Kit (Factory-Included)	Box No. ⁸	
					Flush/Surface	Mono-Flat					
Convertible Mains — Factory-installed Main Circuit Breaker, 65 kA Short Circuit Current Rating — Copper Bus QOM1 Main Frame Size — Convertible to Main Circuit Breaker											
125 A	12	24	12	QO112L125PH	QOC16UF ⁹ , QOC16US	—	6–2/0	PKGTALP1		6	
	16	24	8	QO116L125PG	QOC24UF ⁹ , QOC24US	—				7	
	20	24	4	QO120L125PG	QOC20U100F ⁹ QOC20U100S	—				6	
	24	34	10	QO124L125PG	QOC24UF ⁹ , QOC24US	—				7	
	30	34	4	QO130L125PG	QOC30U125C	—				9	
	32	38	6	QO132L125PG	QOC32UF ⁹	—				8	
Convertible Mains — Factory-installed Main Circuit Breaker 65 kA Short Circuit Current Rating — Copper Bus QOM2 Main Frame Size — Convertible to Main Circuit Breaker											
200 A	12	24	12	QO112L200PG	QOC30UF ⁹ , QOC30US	QOCMF30UC ⁹	4–300	4–250	PKGTALP1	9	
	24	36		QO124L200PG	QOC30UF ⁹ , QOC30US	QOCMF30UC ⁹					
	30	40		10	QO130L200PG	QOC30UF ⁹ , QOC30US					QOCMF30UC ⁹
	40	60		20	QO140L200PG	QOC40UF ⁹ , QOC40US					—
225 A	42	52	10	QO142L225PG	QOC42UF ⁹ , QOC42US	QOCMF42UC ⁹	4–300	PKGTALP2		11	
	54	72	18	QO154L225PG	QOC54UF ⁹	QOCMF54UC ⁹				12	

7. Maximum single pole branch circuits utilizing QO and/or QOT circuit breaker.


8. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

9. Available in gray and white colors. For white equivalencies add the “W” suffix to the reference or see QO Load Center Covers, page 43.

Indoor, QO Convertible Mains (100–225 A), 1Ø — Main Circuit Breaker



QO124M100P



QO142M200P

Table 7 - Plug-on Neutral Load Center Main Breaker, Convertible Mains (1Ø3W–120/240 Vac Indoor—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits	Max. Tandem Circuit Breakers	Load Center box and Interior	Load Center Covers (Order Separately)		Al	Cu	Equipment Ground Bar Kit (Factory-Included)	Box No. ¹⁰
					Flush/Surface	Mono-Flat				
Convertible Mains — Factory-installed Main Lugs — 22 kA Short Circuit Current Rating										
Convertible to Main Lugs or Lower Amperage Main Circuit Breaker										
100 A	12	24	12	QO112M100P	QOC12UF, QOC12US	—	6–2/0	6–1	PK9GTA	5
	16		8	QO116M100P	QOC20U100F ¹¹ , QOC200U100S	—				6
	20		4	QO120M100P	QOC20U100F ¹¹ , QOC200U100S	—				
	24	34	10	QO124M100P	QOC24UF ¹¹ , QOC24US	—	6–2/0	PK15GTA	7	
	32	38	6	QO132M100P	QOC32UF ¹¹	—			8	
125 A	24	34	10	QO124M125P	QOC24UF ¹¹ , QOC24US	—	6–2/0	PK15GTA	7	
	32	38	6	QO132M125P	QOC32UF ¹¹	—			8	
Convertible Mains — Factory-Installed Main Lugs — 22 kA Short Circuit Current Rating										
Convertible to Main Lugs (see below) or Lower Amperage Main Circuit Breaker										
QOM2 Main Circuit Breaker Frame Size — Copper Bus										
150 A	20	30	10	QO120M150P	QOC30UF ¹¹ , QOC30US	QOCMF30UC ¹¹	4–300	4–250	PK15GTA	9
	24	36	12	QO124M150P	QOC30UF ¹¹ , QOC30US					
	30	40	10	QO130M150P	QOC30UF ¹¹ , QOC30US					
	32	40	8	QO132M150P	QOC40UF ¹¹ , QOC40US	—			PK18GTA	10

10. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

11. Available in gray and white colors. For white equivalencies add the "W" suffix to the reference or see QO Load Center Covers, page 43.

Table 7 - Plug-on Neutral Load Center Main Breaker, Convertible Mains(1Ø3W–120/240 Vac Indoor—UL Listed) (Continued)

Mains Rating	Spaces	Max. Single Pole Circuits	Max. Tandem Circuit Breakers	Load Center box and Interior	Load Center Covers (Order Separately)		Al	Cu	Equipment Ground Bar Kit (Factory-Included)	Box No. ¹²
					Flush/Surface	Mono-Flat				
200 A	20	30	10	QO120M200P	QOC30UF ¹³ , QOC30US	QOCMF30UC ¹³	4–300	4–250	PK15GTA	9
	24	36	12	QO124M200P	QOC30UF ¹³ , QOC30US					
	30	40	10	QO130M200P	QOC30UF ¹³ , QOC30US					
	40	60	20	QO140M200P	QOC40UF ¹³ , QOC40US	—	4–300	4–300	PK23GTA	10
	42	52	10	QO142M200P	QOC42UF ¹³ , QOC42US	QOCMF42UC ¹³				11
	54	72	18	QO154M200P	QOC54UF ¹³	QOCMF54UC ¹³				12
		60	72	12	QO160M200PC ¹⁴	QOC60UF/S Included	—	4–300	PK27GTA	24
225 A	40	60	20	QO140M225P	QOC42UF ¹³ , QOC42US	QOCMF42UC ¹³	4–300	PK23GTA	11	
	42	52	10	QO142M225P						

NOTE: 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT (20 A MAX. NON-CTL) and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

12. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

13. Available in gray and white colors. For white equivalencies add the “W” suffix to the reference or see QO Load Center Covers, page 43.

14. For Certification to IEC 60439–1 contact the local Square D sales office; otherwise panels are NOT CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current when QOXD... branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO... VS branch circuit breakers are used).

Indoor, QO Convertible Mains (125–225 A) with Qwik-Grip™, 1Ø



Table 8 - QO Plug-On Neutral Load Centers with Qwik-Grip (1Ø3W-120/240 Vac Indoor—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits	Max. Tandem Circuit Breakers	Load Center box and Interior	Load Center Covers (Order Separately)		Al	Cu	Equipment Ground Bar Kit (Factory-Included)	Box No. ¹⁵
					Flush/Surface	Mono-Flat				
Convertible Mains — Factory-Installed Main Lugs, 65 kA Short Circuit Current Rating — Copper Bus, QOM1 Main Frame Size, Convertible to Main Circuit Breaker										
125 A	24	34	10	QO124L125PQG	QOC24UF ¹⁶ , QOC24US	—	6-2/0	PKGTALP1 Included		7Q
	30	34	4	QO130L125PQG	QOC30U125C	—				9Q
Convertible Mains Factory — Installed Main Lugs, 65 kA Short Circuit Current Rating — Copper Bus, QOM2 Main Frame Size, Convertible to Main Circuit Breaker										
200 A	30	40	10	QO130L200PQG	QOC30UF ¹⁶ , QOC30US	QOCMF30UC ¹⁶	4-250	PKGTALP1 Included		9Q
225 A	42	52	10	QO142L225PQG	QOC42UF ¹⁶ , QOC42US	—	4-300	PKGTALP2 Included		11Q
	54	72	18	QO154L225PQG	QOC54UF ¹⁶	QOCMF54UC ¹⁶				12Q
Convertible Mains-Factory — Installed main Lugs, 65 kA Short Circuit Current Rating — Copper Bus, QOM2 Main Frame Size, Convertible to Main Circuit Breaker										
200 A	30	40	10	QO130M200PQ	QOC30UF ¹⁶ , QOC30US	QOCMF30UC ¹⁶	4-250	PK18GTA (Order separately)		9Q
	42	52	10	QO142M200PQ	QOC42UF ¹⁶ , QOC42US	—	4-300	PK23GTA (Order separately)		11Q
	54	72	18	QO154M200PQ	QOC54UF ¹⁶	QOCMF54UC ¹⁶				12Q

15. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

16. Available in gray and white colors. For white equivalencies add the "W" suffix to the reference or see QO Load Center Covers, page 43

Indoor, QO Convertible Mains (125–225 A) with Included Cover 1Ø



Table 9 - QO Load Centers with Included Cover (1Ø3W–120/240 Vac Indoor—UL Listed)

Mains Rating	Short Circuit Current Rating	Spaces	Max. Single Pole Circuits ¹⁷	Max. Tandem Circuit Breakers	Load Center Box, Interior, and Cover	Al	Cu	Equipment Ground Bar Kit (Order Separately)	Box No.
125 A	65 kA	12	24	12	QO112L125PGC	6–2/0		PKGTALP1 Included	6
		20		4	QO120L125PGC				7
		24	10	QO124L125PGC					
Convertible Mains — Factory-Installed Main Lugs¹⁸									
200 A	65 kA	30	40	10	QO130L200PGC	4–300		PKGTALP1 Included	9
225 A		42	52	10	QO142L225PGC				11
		54	72	18	QO154L225PGC				12
Convertible Mains — Factory-Installed Main Circuit Breaker — QOM1 Main Frame Size — Convertible to Main Lugs¹⁹									
100 A	22 kA	12	24	12	QO112M100PC	6–2/0	6–1	PK9GTA	5
		16		8	QO116M100PC				6
		20		4	QO120M100PC				
		24	34	10	QO124M100PC	6–2/0	PK15GTA, LK100AN	7	
Convertible Mains — Factory-Installed Main Circuit Breaker — QOM2 Main Frame Size — 10 Convertible to Main Lug¹⁹									
150 A	22 kA	30	40	10	QO130M150PC	4–300	4–250	PK18GTA, LK100AN, PK23GTA, LK100AN	9
		42	52		QO142M150PC	4–300		PK18GTA, LK100AN	11
200 A	22 kA	30	40	10	QO130M200PC	4–300	4–250	PK23GTA	9
		40	60	20	QO140M200PC				10
		42	52	10	QO142M200PC	4–300	PK23GTA, LK100AN	11	
		54	72	18	QO154M200PC			12	

17. Maximum single pole branch circuits utilizing QO and/or QOT (20 A MAX. NON-CTL) circuit breakers.
 18. UL Listed 5000 A short circuit current rating for corner grounded Delta systems (Use QO-H circuit breakers only).
 19. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

Rainproof, QO Convertible Mains (100–225 A), 1Ø — Main Lugs and Main Breaker

Table 10 - Plug-on Neutral Load Center Main Lugs, Convertible Mains (1Ø3W–120/240 Vac Rainproof — UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ²⁰	Max. Tandem Circuit Breakers	Load Center box and Interior	Al	Cu	Equipment Ground Bar Kit (Factory-Included)	Box No. ²¹
Convertible Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating ^{22, 23, 24} QOM1 Main Circuit Breaker Frame Size, Convertible to Main Circuit Breaker — Equipment Ground Bar Included								
125 A	12	24	12	QO112L125PGRB	6–2/0		PKGTALP1	3R
	16		8	QO116L125PGRB				4R
	24	34	10	QO124L125PGRB				
Convertible Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating ^{23, 24} QOM2 Main Circuit Breaker Frame Size, Convertible to Main Circuit Breaker — Equipment Ground Bar Included								
200 A	12	24	12	QO112L200PGRB	4–300	4–250	PKGTALP1	5R
	30	40	10	QO130L200PGRB				6R
	40	60	20	QO140L200PGRB			PKGTAL2	7R
225 A	42	52	10	QO142L225PGRB	4–300		PKGTALP2	8R

Table 11 - Plug-on Neutral Load Center Main Breaker, Convertible Mains (1Ø3W–120/240 Vac Rainproof — UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits	Max. Tandem Circuit Breakers	Load Center Box and Interior	Al	Cu	Equipment Ground Bar Kit (Order Separately)	Box No. ²¹
Convertible Mains — Factory-Installed Main Lugs — 22 kA Short Circuit Current Rating Convertible to Main Lugs ²⁵ QOM1 Main Circuit Breaker Frame Size — Copper Bus								
100 A	12	24	12	QO112M100PRB	6–2/0		PK9GTA	3R
	16		8	QO116M100PRB				4R
	20		4	QO120M100PRB				
	24	34	10	QO124M100PRB			PK15GTA	4R
125 A	24	34	10	QO124M125PRB				
Convertible Mains — Factory-Installed Main Lugs — 22 kA Short Circuit Rating Convertible to Main Lugs ²⁶ QOM2 Main Circuit Breaker Frame Size — Copper Bus								
150 A	20	30	10	QO120M150PRB	4–300	4–250	PK15GTA	5R
	30	40		QO130M150PRB				6R
200 A	20	30	10	QO120M200PRB				PK23GTA
	30	40		QO130M200PRB			6R	
	40	60	20	QO140M200PRB	7R			
225 A	42	52	10	QO142M200PRB	4–300		PK18GTA	8R
	42	52	10	QO142M225PRB	4–300			

20. Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
 21. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.
 22. UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.
 23. UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
 24. Side hinge door device; allow 1–1/4 in. on left side for door to open.
 25. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10 k AIR branch circuit breakers to permit their application on systems up to 22 kA.
 26. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10k AIR branch circuit breakers to permit their application on systems up to 22 kA.

Backup Power Solutions, (30–200 A), 1Ø



QO48M60DSGP

QO1DM10050TRBR

QO1DM10030TRBR

Table 12 - Backup Power Solutions (1Ø3W–120/240 Vac Backup Power — UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ²⁷	Max. Tandem Circuit Breakers	Load Center Box and Interior	Equipment Ground Bar Kit (Order Separately)	Al	Cu	Box No. ²⁸
Generator Panels — Manual Transfer for Sub-Feed Applications NEMA 1 (Indoor) Factory-Installed Main Circuit Breakers with Mechanical Interlock — 10 kA Short Circuit Current Rating								
30 A	4	8	4	QO48M30DSGP	PK7GTA	8–1		4
60 A				QO48M60DSGP				
Generator Panels — Manual Transfer with Generator Power Inlet Plug for Sub-Feed Application NEMA 3R (Outdoor) Factory-Installed Main Circuit Breakers with Mechanical Interlock — 10 kA Short Circuit Current Rating								
100 A	4	8	4	QO1DM10020TRBR	Factory-Installed	—	8–2	17R
				QO1DM10030TRBR		—		
				QO1DM10050TRBR		—		

QO Riser Panels (125–200 A), 1Ø

Table 13 - QO Riser Panels (1Ø3W–120/240 Vac Special Applications — UL Listed)

Mains Rating	Spaces	Max. 1P Circuits ²⁹	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. ²⁸
					Flush	Mono-Flat		Al	Cu	
Convertible Mains — Factory-Installed Main Lugs, 65 kA Short Circuit Current Rating Convertible to QOM1 22 kA Short Circuit Current Rating Main Circuit Breaker when used with QOC cover below — Copper Bus										
125 A	12	24	12	QO112L125PWG	QOC20UFWG ³⁰	NQC20FWG ³⁰	PK15GTA	6–2/0		14
	20		4	QO120L125PWG						
Convertible Mains — Factory-Installed Main Lugs, 65 kA Short Circuit Current Rating Convertible to QOM2 22 kA Short Circuit Current Rating Main Circuit Breaker (See Indoor, QO Convertible Mains (125–225 A), 1Ø — Main Lugs, page 19) when used with QOC cover below — Copper Bus										
200 A	30	40	10	QO130L200PWG	QOC30UFWG ³⁰	NQC30FWG ³⁰	PK23GTA	4–300	4–250	23

27. Maximum single pole branch circuits utilizing QO and/or QOT (20 A MAX. NON-CTL.) circuit breakers.

28. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

29. Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

30. Available in gray and white colors. For white equivalencies add the “W” suffix to the reference or see QO Load Center Covers, page 43.

Table 13 - QO Riser Panels (1Ø3W–120/240 Vac Special Applications — UL Listed (Continued))

Mains Rating	Spaces	Max. 1P Circuits ³¹	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. ³²
					Flush	Mono-Flat		Al	Cu	
Convertible Mains — Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible to Main Lugs (See Indoor, QO Convertible Mains (125–225 A), 1Ø — Main Lugs, page 19) or Lower Amperage QOM2 Main Circuit Breaker (See Indoor, QO Convertible Mains (100–225 A), 1Ø — Main Circuit Breaker, page 20) when used with QOC cover below — Copper Bus										
200 A	24	36	12	QO124M200PWG125 ³³	QOC30UFWG ³⁴	NQC30FWG ³⁴	PK23GTA	4–300	4–250	23

Panelboard-style Covers for Riser Panels

Mono-Flat™ Front available for riser panels as an alternative standard load center cover listed above. Provides a low-profile, aesthetically pleasing solution for high-traffic areas in upscale multi-family applications. Deadfront included. Lock kit not provided. Cover NQC30FWG CANNOT be used when panel has been converted to a main circuit breaker panel. ³⁵

Mains Rating of Load Center	Cat. No.
125 A	NQC20FWG
200 A	NQC30FWG

Table 14 - Auxiliary Gutter

Cat. No.	Cover	Conduit Riser Size	Width	Height	Depth
UL Listed for use with standard 1Ø and 3Ø load centers for riser applications ³⁶.					
SDAG26	Flush	1–3/4, 2, 2–1/2 ³⁷ or 3	13.5	26.12	3.75

Table 15 - Tap Kits for Use with Auxiliary Gutter

Cat. No.	Use with Auxiliary Gutter Cat. No.	Riser Wire		Tap Off Wire	
		Lug Type	Al/Cu Wire Size	Lug Type	Al/Cu Wire Size
SDGT30020	SDAG26	Mechanical (Included)	(2) 6 AWG-300 kcmil	Mechanical (Included)	(1) 6–2/0 AWG
SDGT300300					(2) 6 AWG-300 kcmil
SDGT300C10C		Anderson VCEL030516H1 (Not Included)	(2) 4 AWG-300 kcmil	Anderson VCEL02114S1 (Not Included)	(1) 8–1/0 AWG
SDGT300C300C				Anderson VCEL030516H1 (Not Included)	(2) 4 AWG-300 kcmil
QOGL20 Grounding Terminals		Mechanical (Included)	(2) 6–2/0 AWGI	—	—

31. Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

32. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

33. Comes with 125 A main circuit breaker factory installed.

34. Available in gray and white colors. For white equivalencies add the “W” suffix to the reference or see QO Load Center Covers, page 43.

35. Order catalog number PK4FL for field-installed lock kit.

36. One tap kit required for each riser wire.

37. When used with B300 bolt-on hubs.

QO Standard Load Centers

Indoor, QO Fixed Mains (30–125 A), 1Ø — Main Lugs and Main Breaker

QO Standard Load Center Main Lugs and Main Breaker, Fixed Mains (1Ø3W–120/240 Vac Special Applications — UL Listed)

Table 16 - Low Amperage Fixed Main Lugs Indoor Load Centers (accepts only QO Plug-on Circuit Breakers — not compatible with QO Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuit ³⁸	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover with Door		Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No.
					Flush	Surface	Al	Cu		
Fixed mains — Factory-Installed Main Lugs — 10 kA Short Circuit Current Rating³⁹										
30 A	2	2	0	QO20L30S ^{40, 41}	Cover Included — Without Door		12–10	14–10	PK3GTA1	1
70 A		4	2	QO24L70F/S ^{42, 43}			12–10	14–10	PK4GTA	2
100 A	6	12	6	QO612L100F/S ^{42, 44}	Cover Included — With Door		8–1/0	PK7GTA	4	
				QO612L100DF/S ^{42, 44}						
	8	16	8	QO816L100F/S ^{42, 44}	Cover Included — Without Door					
				QO816LL100DF/S ^{42, 44}						
	6	12	6	QO612L100DFCU/SCU ^{42, 44, 45}	Cover Included — With Door					
8				16			8	QO816L100DFCU/SCU ^{42, 44, 45}		
125 A	4	8	4	QO148L125GF/S ^{42, 46}	Cover Included — Without Door	12–10	14–2/0	PK7GTA ⁴⁷	21	

Table 17 - Low Amperage Fixed Mains Indoor Load Centers with Factory Installed Ground Bar (Accepts only QO Plug-On Circuit Breaker — not compatible with QO Plug-on Neutral Circuit Breakers)

Mains Rating	Short Circuit Current Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center, Box, Interior, and Cover	Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No.
							Al	Cu	
Manufactured Hourings: 1Ø2W 120 Vac — Main Lugs Only — CSA Certified									
30 A ⁴¹	10 kA	2	2	0	QO2L30TTS ⁴⁰	Factory-Installed	12–10	14–10	1
50 A			4	2	QO24L50TTS ⁴³		—	14–6	2
1Ø2W 120 Vac — Main Circuit Breaker — CSA Certified									
30 A	10 kA	3	5	2	QO35FM30TTF/S	Factory-Installed	48		3
1Ø2W 120 Vac — Main Circuit Breaker — CSA Certified									
70 A	10 kA	2	4	2	QO24L70TS ⁴³	Factory-Installed	12–3	14–4	2

38. Maximum single pole branch circuits utilizing QO and/or QOT circuit breaker.
 39. UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
 40. Will not accept QO-EPD or Qwik-Gard QO-GFI or QO-AFI circuit breakers.
 41. Mains rated 25 A when Al wire is used.
 42. Order F for flush device or S for surface device.
 43. Use 10 AWG maximum size wire for GFI and AFI circuit breakers.
 44. 70 A Max. branch circuit breaker and 100 A max. back fed main circuit breaker.
 45. CU indicates copper bus.
 46. Copper bus.
 47. Factory-included
 48. Main circuit breaker is field-installed standard QO single pole circuit breaker.

Indoor, QO Fixed Mains (300–400 A), 1Ø — Main Lugs and Main Breaker

QO Standard Load Center Main Lugs and Main Breaker, Fixed Mains
(1Ø3W–120/240 Vac Special Applications — UL Listed)



MH50



QONQ30LS400



NC50NQVS

Table 18 - High Amperage Fixed Main Breaker and main Lugs Indoor Load Centers (Accepts Only QO Plug-On Circuit Breakers — Not compatible with QO Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box and Interior	Indoor Cover with Door (Order Separately)		Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No.
					Flush	Surface	Al	Cu		
Fixed Mains — Factory-Installed Main Circuit Breaker — 65 kA Short Circuit Current Rating										
300 A	42	42	0	QONQ42MS300 (Int) ⁴⁹ MH62 (Box) ⁵⁰	NC62NQVF	NC62NQVS	(1) 4–500 or (2) 4–3/0	PK27GTA ⁵¹ or PK15GTA6	16	
400 A				QONQ42MS400 (Int) ⁴⁹ MH62 (Box) ⁵⁰						
Fixed Mains — Factory-Installed Main Lugs — 65 kA Short Circuit Current Rating^{52, 53}										
400 A	30	30	0	QONQ30LS400 (Int) ⁴⁹ MH50 (Box) ⁵⁰	NC50NQVF	NC50NQVS	(1) 1/0–750 or (2) 1/0–300	PK27GTA ⁵¹ or PK15GTA6	15	
	42	42		QONQ42LS400 (Int) ⁴⁹ MH50 (Box) ⁵⁰						

49. Interior only, order box separately.

50. PE1A Discount Schedule.

51. PK27GTA includes a 6–2/0 AWG Al/Cu lug.

52. UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.

53. UL Listed 5000 A short circuit current rating for corner grounded Delta systems. Use QO-H circuit breakers only.

Rainproof, QO Fixed & Convert. Mains (60–200 A), 1Ø — Main Lugs and Main Breaker



QO24L60NRNM



QO816L100RB

Table 19 - QO Standard Load Center Main Lugs, Fixed Mains (1Ø3W–120/240 Vac Rainproof — UI Listed

Mains Rating	Spaces	Max. Single Pole Circuits ⁵⁴	Max. tandem Circuit Breakers	Load Center Box and Interior	Main Wire Size AWG / kcmil		Equipment Ground Bar Kit (Order Separately)	Box No.
					Al	Cu		
Non-Metallic Enclosure								
Fixed Mains — Factory-Installed Main Lugs — 10 kA Short Circuit Current Rating								
60 A	2	4	2	QO24L60NRNM	12–4	14–4	Factory-Installed	1NM
Metallic Enclosure								
Fixed Mains — Factory-Installed Main Lugs — 10 kA Short Circuit Current Rating								
40 A	2	2	0	QO2L40RB ⁵⁵	12–6	14–6	PK3GTA1	1R
70 A		4	2	QO24L70RB ⁵⁵	12–3	14–4	PK4GTA	
100 A	6	12	6	QO612L100RB ⁵⁶	8–1/0		PK7GTA	2R
				QO612L100TRB ⁵⁶			Factory-installed	
	8	16	8	QO816L100RB ⁵⁶			PK7GTA	
	6	12	6	QO612L100RBCU ^{56, 57}				
8	16	8	QO816L100RBCU ^{56, 57}					
125 A	4	8	4	QO148L125GRB ⁵⁷	12–2/0	14–2/0	PK7GTA Factory-Included	15R

Table 20 - QO Standard Load Center Main Breaker, Convertible Mains (1Ø3W–120/240 Vac Rainproof — UL Listed

Mains Rating	Spaces	Max. Single Pole Circuits ⁵⁴	Max. tandem Circuit Breakers	Load Center Box and Interior	Main Wire Size AWG / kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. ⁵⁸
					Al	Cu		
Convertible Mains — Factory-Installed Main Circuit Breaker with Feed-thru Lugs, 22 kA Short Circuit Current Rating								
Convertible to Main Lugs or Lower Amperage Main Circuit Breaker ^{59, 60} QOM1 or QOM2 Main Circuit Breaker Frame Size — Copper Bus								
125 A	6	12	6	QO1612M125FTRB ⁶¹	4–2/0		PK12GTA	3R
150 A	8	16	8		4–250		PK15GTAL	4R
200 A	8	16	8	QO1816M200FTRB ⁶¹				

54. Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.
 55. Use 10 AWG maximum size wire for GFI and AFI circuit breaker.
 56. 70 A Max. branch circuit breaker and 70 A max. back fed main circuit breaker.
 57. Copper bus.
 58. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.
 59. Side hinge door device; allow 1–1/4 in. on left side for door to open.
 60. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT, QO-GFI, QO-AFI, QO-EPD and QOPL 10 k AIR branch circuit breakers to permit their application on systems up to 22 kA
 61. QO1612M125FTRB provided with QOM1 frame main circuit breaker. QO1816M150FTRB and QO1816M200FTRB provided with QOM2 frame main circuit breaker.

Indoor and Rainproof, QO Fixed and Convertible Mains (60–225 A), 3Ø — Main Lugs and Main Breaker

Table 21 - QO Standard Load Center Main Lugs and Main Breaker (3Ø4W–208Y/120 Vac, 3Ø4W–240/120 Vac Delta, and 3Ø3W–240 Vac Delta—Indoor and Rainproof—UL Listed)

	Mains Rating	Max. Number of 1P QO circuit breakers	Load Center Box and Interior	Indoor Cover with Door (Order Separately)		Main Wire Size AQG / kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. ⁶²
			Cat. No.	Flush	Surface	Al	Cu		
Indoor	Fixed Mains — Factory-Installed Main Lugs — Copper Bus — 65 kA Short Circuit Current Rating ⁶³								
	60 A	3	QO403L60NF/S	Cover Included With Load Center (No Door)		12–6	14–6	PK4GTA	13
	125 A	12	QO312L125G ⁶⁴	QOC16UF	QOC16US	6–2/0	6–2/0	Factory- Included ⁶⁵	6
		20	QO320L125G ⁶⁴	QOC24UF	QOC24US				7
		24	QO324L125G ⁶⁴	QOC24UF	QOC24US				
	200 A	18	QO318L200G ⁶⁴	QOC30UF	QOC30US	4–250	4–250		9
		30	QO330L200G ⁶⁴	QOC30UF	QOC30US				
	225 A	42	QO342L225G ⁶⁴	QOC42UF	QOC42US	4–300	4–300		11
	Convertible Mains — Factory-Installed QDL Main Circuit Breaker — Copper Bus — 25 kA Short Circuit Current Rating ⁶⁶								
	100 A	27	QO327M100 ⁶⁷	QOC30UF	QOC30US	6–1	6–1	PK15GTA	9
	125 A	30	QO330MQ125 ^{68, 69}	QOC342MQF	QOC342MQS	4–250	4–250	PK18GTA	12
	150 A	30	QO330MQ150 ^{68, 69}	QOC342MQF	QOC342MQS			PK23GTA	
		42	QO342MQ150 ^{68, 69}	QOC342MQF	QOC342MQS				
	200 A	30	QO330MQ200 ^{68, 69}	QOC342MQF	QOC342MQS			PK18GTA	
		42	QO342MQ200 ^{68, 69}	QOC342MQF	QOC342MQS			PK23GTA	
	225 A	42	QO342MQ225 ^{68, 69}	QOC342MQF	QOC342MQS				

62. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

63. UL short circuit current rating depends on lowest interrupting of circuit breaker installed.

64. For Certification to IEC 60439–1 contact the local Square D sales office; otherwise panels are NOT CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current Rating when QOXD branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO vs. branch circuit breakers are used).

65. PKGTALP1

66. 25 kA short circuit current rating SCCR maximum with Square D Type QDL main circuit breaker, or 22 kA SCCR maximum with back-fed Type QO-VH main circuit breaker, feeding QO 10 k AIR branch circuit.

67. Includes factory-installed back fed QO3100VH main circuit breaker.

68. 65 kA Short Circuit Current Rating maximum with field-installed Square D type QGL 65 k AIR minimum main circuit breaker feeding QO and Q1 10 k AIR minimum branch circuit breakers.

69. For Certification to IEC 60439–1 contact the local Square D sales office; otherwise panels are NOT CE marked. (For use on 415Y/240 Vac 3-phase 4-wire, 3,000 Short Circuit Current Rating when QOXD... branch circuit breakers are used and 10,000 Short Circuit Current Rating when QO...VS branch circuit breakers are used).

Table 21 - QO Standard Load Center Main Lugs and Main Breaker (3Ø4W–208Y/120 Vac, 3Ø4W–240/120 Vac Delta, and 3Ø3W–240 Vac Delta—Indoor and Rainproof—UL Listed) (Continued)

Mains Rating	Max. Number of 1P QO circuit breakers	Load Center Box and Interior Cat. No.	Indoor Cover with Door (Order Separately)		Main Wire Size AQQ / kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. 70			
			Flush	Surface	Al	Cu					
Rainproof	Fixed Mains — Factory-Installed Main Lugs — Copper Bus — 65 kA Short Circuit Current Rating ^{71, 72}										
	60 A	3	QO403L60NRB	Cover Included		12–6	14–6	PK4GTA	10R		
	125 A	12	QO312L125GRB			6–2/0	6–2/0	Factory-Included ⁷³	3R		
		20	QO320L125GRB						4R		
	200 A	18	QO318L200GRB					4–250	4–250	Factory-Included ⁷⁴	6R
		30	QO330L200GRB					4–300	4–300		8R
	225 A	42	QO342L225GRB								
	Convertible Mains — Factory-Installed QDL Main Circuit Breaker — Copper Bus — 25 kA Short Circuit Current Rating ^{75, 72}										
	100 A	27	QO327M100RB ⁷⁶	Cover Included		4–2/0	4–2/0	PK15GTA	6R		
	125 A	30	QO330MQ125RB ⁷⁷					4–250	4–250	PK18GTA	14R
	150 A		QO330MQ150RB ⁷⁷								
	200 A		QO330MQ200RB ⁷⁷								
	225 A	42	QO342MQ200RB ⁷⁷							PK23GTA	
			QO342MQ225RB ⁷⁷								

70. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.
 71. UL short circuit current rating depends on lowest interrupting rating of circuit breaker installed.
 72. Side hinge door device allow 1–1/4 in. on left side for door to open.
 73. PKGTALP1
 74. PKGTALP2
 75. 25 kA short circuit current rating SSCR maximum with Square D Type QDL main circuit breaker, or 22 kA SCCR maximum with back-fed Type QO-VH main circuit breaker feeding QO 19 k AIR branch circuit.
 76. Includes factory-installed back fed QO3100VH main circuit breaker.
 77. 65 kA Short Circuit Current Rating maximum with field-installed Square D type QGL 65 k AIR minimum main circuit breaker feeding QO and Q1 10 k AIR minimum branch circuit breakers.

Mains Kits, 1Ø and 3Ø

Table 22 - 1Ø, Field-Installed Main Circuit Breaker Kits



QOM2100VH

Main Circuit Breaker Rating ⁷⁸	Convertible Load Center Mains Rating	22 k AIR ⁷⁹	Lug Wire Size ⁸⁰ AWG/kcmil	
		Main Circuit Breaker ⁸¹		
QOM1 Frame Size — Use with Convertible Main Load Centers Only				
50 A	100–125	QOM50VH	12–2/0 Al or Cu	
60 A		QOM60VH		
70 A		QOM70VH		
80 A		QOM80VH		
90 A		QOM90VH		
100 A		QOM100VH		
110 A	125	QOM110VH		
125 A		QOM125VH		
QOM2 Frame Size — Use with Convertible Main Load Centers Only				
100 A	150–225	QOM2100VH		4–300 Al or Cu
125 A		QOM2125VH		
150 A		QOM2150VH		
175 A	200–225	QOM2175VH		
200 A		QOM2200VH		
225 A		QOM2225VH		

Table 23 - 1Ø, Field-Installed Main Lugs Kits



QOL125

Main Lugs Rating ⁷⁸	Use on Convertible Load Center with Mains Rating	Cat. No.	Lug Wire Size ⁸⁰ AWG/kcmil Al or Cu
125 A	100–125 A	QOL125 ⁸²	6–2/0
		QOL125VD ⁸²	6–4/0
225 A	150–225 A	QOL225 ⁸²	6–300



QGL32080

78. Do not exceed the load center mains rating.
 79. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.
 80. Wire range listed for QOL lug kits is the wire range of that lug. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.
 81. Add suffix 1021 for 120, 208, or 240 Vac shunt trip.
 82. If main circuit breaker knockout has been removed from the load center's trim, order appropriate filler plate from Table 1.51, page 1–24.

Table 24 - 3Ø, Main Circuit Breakers

Amperage	25 k AIR	65 k AIR	100 k AIR ⁸³
Field-Installed Alternate Main Circuit Breakers for QO 3Ø Main Circuit Breaker Load Centers rated 70–225 A. Do not exceed the load center main rating.			
70 A	QDL32070	QGL32070	QJL32070
80 A	QDL32080	QGL32080	QJL32080
90 A	QDL32090	QGL32090	QJL32090
100 A	QDL32100	QGL32100	QJL32100
110 A	QDL32110	QGL32110	QJL32110
125 A	QDL32125	QGL32125	QJL32125
150 A	QDL32150	QGL32150	QJL32150
175 A	QDL32175	QGL32175	QJL32175
200 A	QDL32200	QGL32200	QJL32200
225 A	QDL32225	QGL32225	QJL32225

Table 25 - 3Ø, Main Lugs Kits

Main Lugs Amperage Rating	Cat. No.	Lug Wire Size AWG/kcmil
Field-Installed Main Lugs for Convertible 3Ø Main Circuit Breaker Load Centers		
125 A	QOL3125	6–2/0 Cu/Al
225 A	QOL3225	6–300 Cu/Al

QO Label Samples

QO Box Label Sample

<ul style="list-style-type: none"> Number of circuits maximum Enclosure catalog number Catalog number of covers; flush or surface See load center interior for the catalog number Voltage ratings Amperage rating 	<p>Wire range for lug torque data rating</p>	<p>Short circuit ratings</p>	<p>Short circuit ratings and additional or replacement circuit breakers</p>	<ul style="list-style-type: none"> UL manifest CE if required NOM if required Date code Plant code Label part number Manufacturer trademark
---	--	------------------------------	---	--

QO™ LOAD CENTER
See panelboard interior for Catalog No. Box / Caja: BX339
Cover / Cubierta: QOC342MCF or/ó QOC342MCS
Circuit max. / Max. Circuitos: 42
Type 1 (IP20) Enclosure / Gabinete Tipo 1
Use 415V/240 V~, 3Ø - 4 wire/4-wires (IEC), LL 2,000 volts 50 / 60 Hz (IEC). For 240V~ - 3 Ph-3 W system, use only breakers rated 240 V. For 240/120 V~ - 3Ph - 4W delta systems, "B" phase must be 200V~ neutral. Breaker poles connected to phase "B" must be rated 240 V~.
Main max. / Max. Linea principal -225A
See main or service disconnect rating if installed.
240 V~ Max., 3Ø, 50/60 Hz, (LL)

LUG TORQUE DATA
SEE CIRCUIT BREAKERS AND FIELD INSTALLED UNITS FOR WIRE RANGE AND TORQUE.

Lug type	Wire Range (AWG/kcmil)	Torque (Inch)
Line Neutral Lug	# 250 Cu/Al	250
Main Lug	# 250 Cu/Al	250
Alternate Main Breaker	See Main Breaker	See Main Breaker

BRANCH NEUTRAL & EQUIPMENT GROUNDING BAR

WIRE RANGE (AWG)	TORQUE (Lb-in)		BAR WITH 1 SCREW SIZE
	BAR WITH 2 SCREWS	SMALL	
1Ø - 3 Cu/Al	50	—	—
4 Cu/Al	45	—	3/8
Ø Cu/Al	45	25	3/8
Ø Cu/Al	40	10	25
1Ø-14 Cu, 1Ø-12 Al	—	10	20

EQUIPMENT GROUND COMBINATIONS

(Ø) 14 Cu	25	30	25
(Ø) 12 Cu/Al	25 <td>30 <td>25</td> </td>	30 <td>25</td>	25
(Ø) 10 Al	—	—	20

SHORT CIRCUIT CURRENT RATING

RMS Symmetrical Amperes x 1000 (S)~ Max.	Integral or Remote Main Catalog Designation or Fuse Class (Max. A)	Branch Circuit Breaker Catalog Designation (Max. A)
15 @ 240	—	QO-H
10 @ 240	—	QO-VH (125) #
22 @ 240	—	QO-VH (100)
85 @ 240	—	QO (100) *
100 @ 240	1S (200), 1E (200), J (200)	QO
25 @ 240	QO (225)	1 pole QO *
85 @ 240	QO (225)	2 poles QO (125) *
100 @ 208Y/120 @ 415V/240	QJ (225)	3 poles QO (30) *
10 (17 break) @ 415V/240	—	3 poles QO-VH (100) #
—	—	QO-XD (100)
—	—	QO-VS (63)

* 240V~ 3 Ph 3 W Grounded "B" phase. # QO includes suffixes: AFI, DF, EPD, EPE, GFI, and PL. # QO-VH includes suffixes: AFI, DF, and GFI.

See Circuit Breaker for voltage and interrupting Rating. The rating is equal to the lowest interrupting Rating of any Circuit Breaker installed. Refer to branch or main Circuit Breakers for individual ratings. Additional or Replacement Branch or Main Circuit Breaker, or Service Disconnect MUST have an interrupting Rating equal to or greater than that of the Circuit Breaker with the lowest interrupting Rating - priority included. See panelboard interior for Circuit Breaker types.

UL LISTED
ELECTRIC CABINET
BOX V-2013
IEC 60439-1

For installation, repairs or alterations, call an electrical contractor or electrician. Minimum continuous loads not to exceed 80% of the ampere rating of any over-current device installed. Los cargos máximos continuos no deben exceder el 80% de la capacidad amperaje de cualquier equipo de sobre corriente instalado.

SQUARE D™

YYWWDS 13 NHA56836

83. When these 3 P circuit breakers are used as the main circuit breaker of a 3Ø load center, the maximum AIR rating is 65 kA at 240 Vac and 100 kA at 208 Vac.


QO Wiring Diagram Sample

<ul style="list-style-type: none"> • Service Equipment marking. Unused neutral branch terminal for equipment grounding, service equipment application only. • Installation of back-fed main circuit breaker and required kit 	<p>Alternate wiring diagram for main circuit breaker or main lug</p>	<p>Square D circuit breakers that may be used in this load center</p> <p>Load center accessories</p>
--	--	--

Suitable for use with 75 °C Copper or Aluminum main conductors. See branch breakers for branch wire ratings.

- Suitable for use as Service equipment when Service Disconnect (Main Breaker) is installed.
- Suitable for use as Service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance branch circuit panelboard.
- See NEC, ANSI / NFPA 70
- When used as Service equipment, all unused neutral terminals may be used for terminating equipment ground wires.
- When used as Service equipment install service entrance barrier kit PK5B3 for integral Breakers.
- For back-fed main applications install PK5B3BF.
- Service entrance barrier does not allow the load center to be serviced energized.

1. Box bonding when required. / Conexión a la caja cuando sea necesario.
2. Service ground when required. / Tierra de acometida cuando fuese necesario.
3. Main lugs kit no. / No. de accesorio de las zapatas principales: QOL3225.
4. Lug kit when installed. / Accesorio de la zapata cuando se instala.
5. For back-fed main applications install. / Para aplicaciones de dispositivos principales de alimentación inversa instale el kit: PK5B3BF.
6. For integral main Circuit Breaker install. / Para interruptor automático integral principal instale: PK5B3.



Notes

One single pole, one plug on space. One two pole requires two plug on spaces. One three pole requires three plug on spaces.

Torque Note: When main lug connector mounting nuts are loosened or removed, retighten to 75 lb-in torque.

Torque Note: When interior mounting screw is loosened or removed, retighten to 35 lb-in torque.


Assembled in US with US & Foreign Parts

NVE50185

Load Center Accessories - Kits

- PK5B3 Service Entrance Barrier Integral Main Breaker
- PK5B3BF Service Entrance Barrier Kit
- QOL3250 Phase Surge Arrestor
- QOL3251 Phase Plug-on Subfeed Lugs *
- QOL3252 Phase Plug-on Subfeed Lugs *
- PK5270TA(L) Equipment Ground Bar
- PK5TAS Equipment Ground Bar Insulator
- LK100AN Neutral Terminal Kit
- LK150AN Neutral Terminal Kit
- QOL3225 2-50 AWG Al/Cu wire Main Lugs

* May plug on two adjacent spaces.
 ** May plug on three adjacent spaces.




Equipment Grounding Terminals

QO Wiring Diagrams

QO Load Centers — Main Lugs


Figure 3 - QO Load Centers 1Ø — Main Lugs

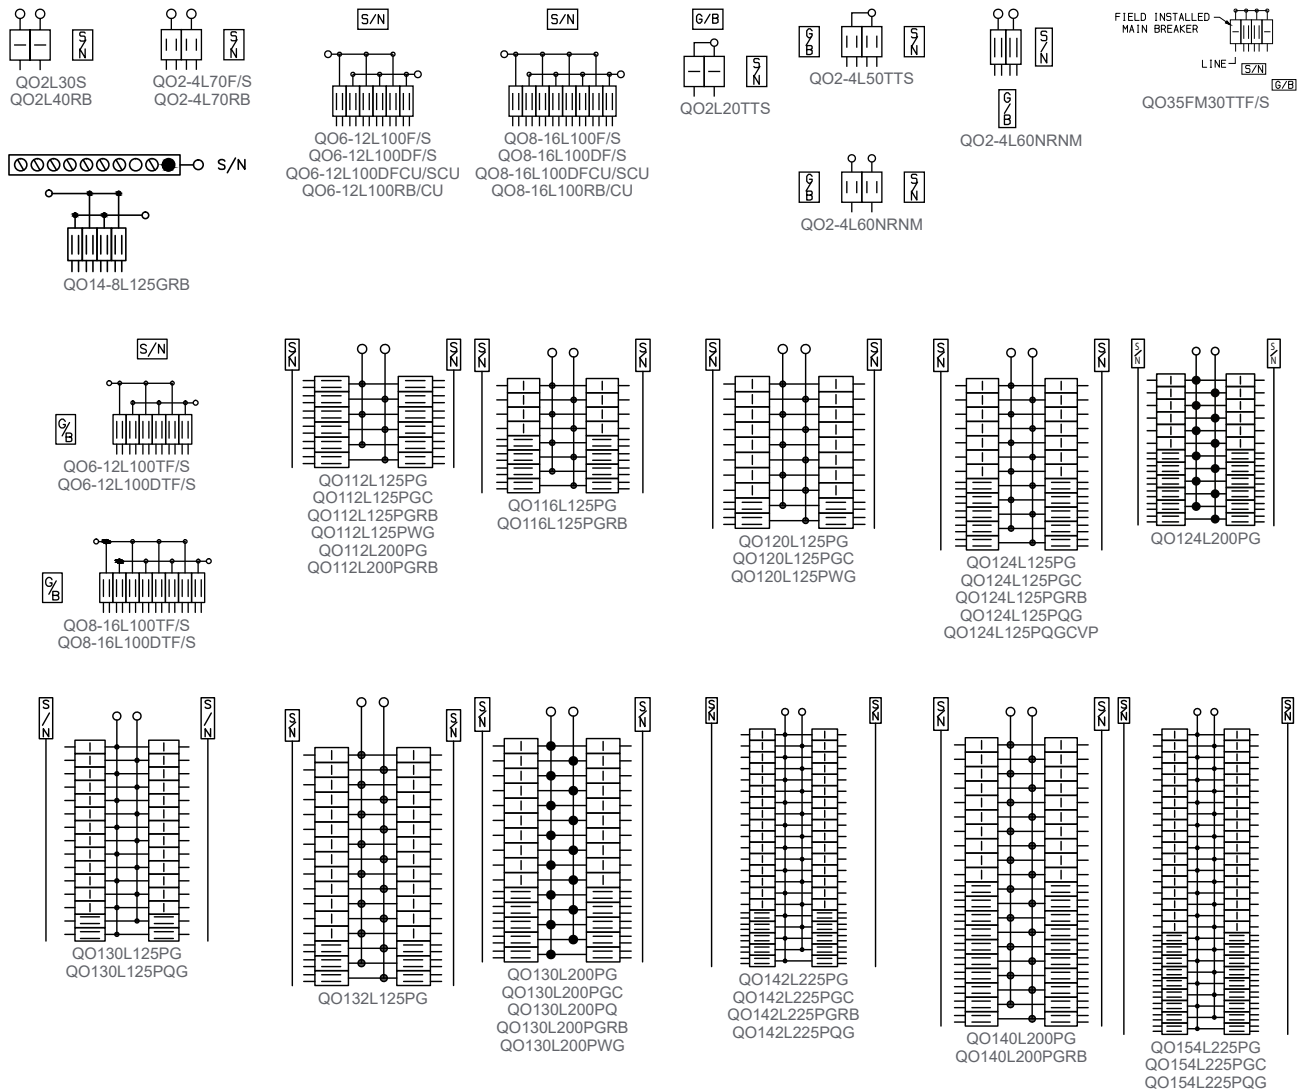

QO Load Centers — Main Circuit Breaker


NOTE: See each catalog number's associated technical drawing online for additional wiring diagram details.

Figure 4 - QO Load Centers 1Ø — Main Circuit Breaker

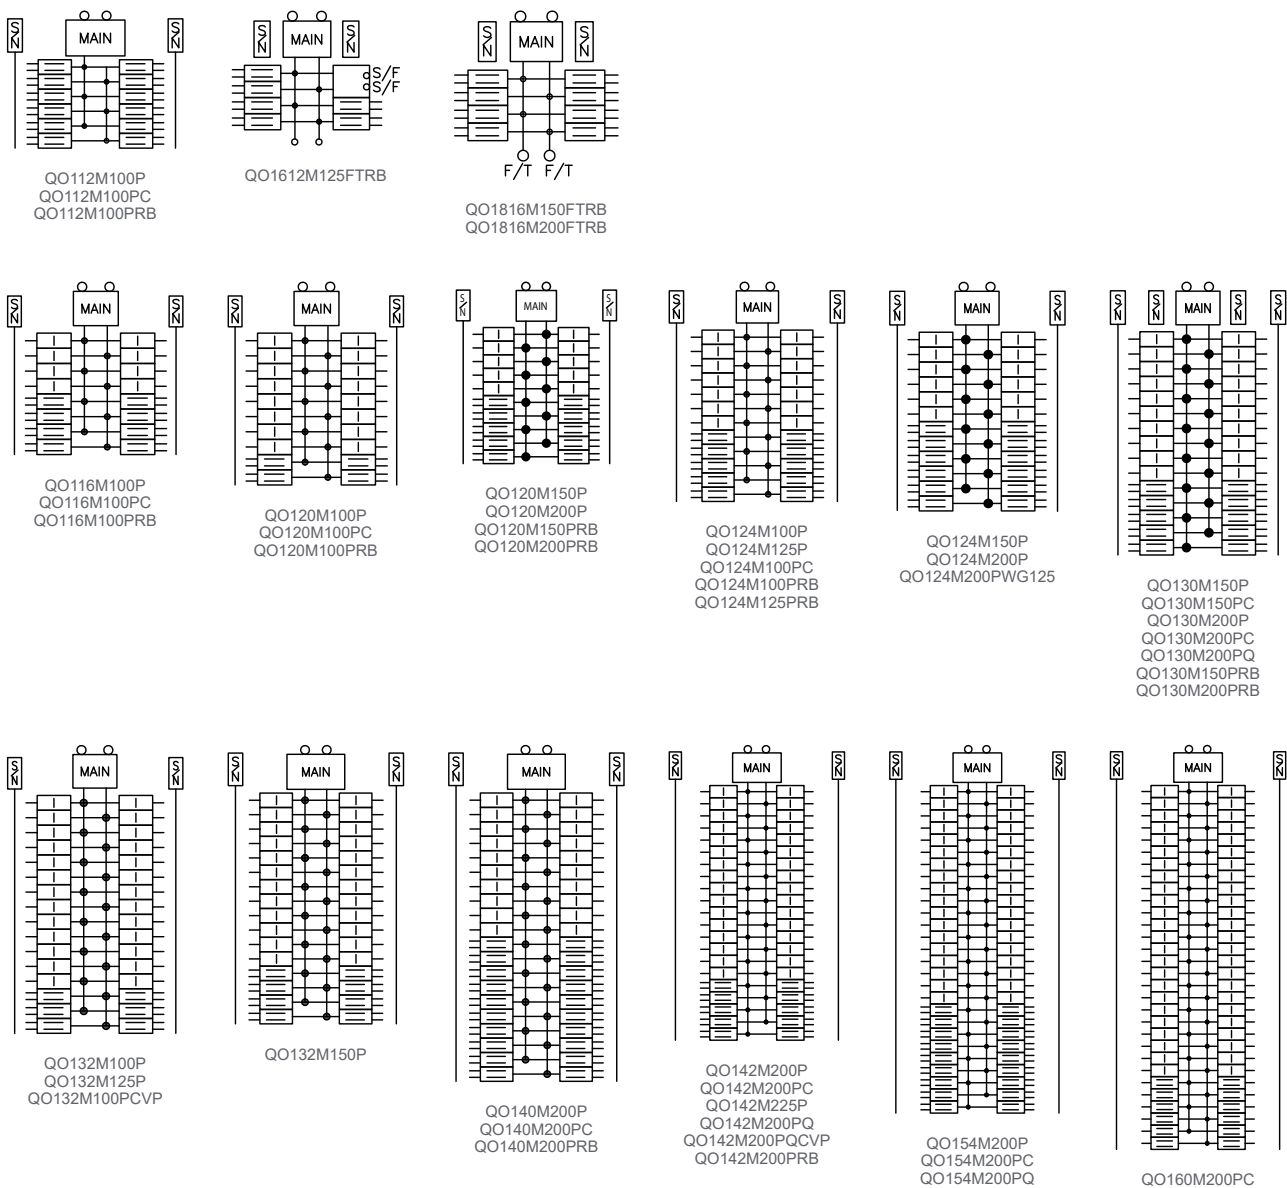


Backup Power Solutions


Figure 5 - Backup Power Solutions

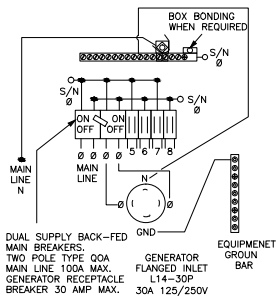


QO1DM10030TRBR




QO4-8M30DS-GP



QO1DM10020TRBR

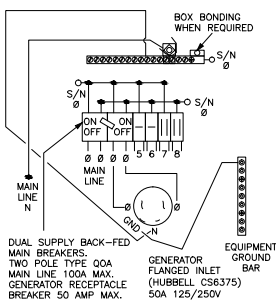


QO1DM10050TRBR

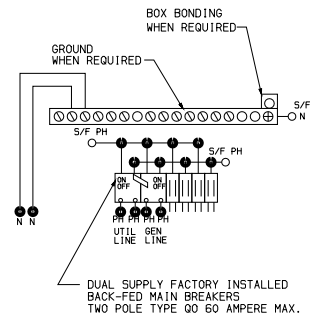

QO4-8M60DS-GP

QO Load Centers — Main Lugs and Main Circuit Breaker

Figure 6 - QO Load Centers 3Ø — Main Lugs & Main Circuit Breaker

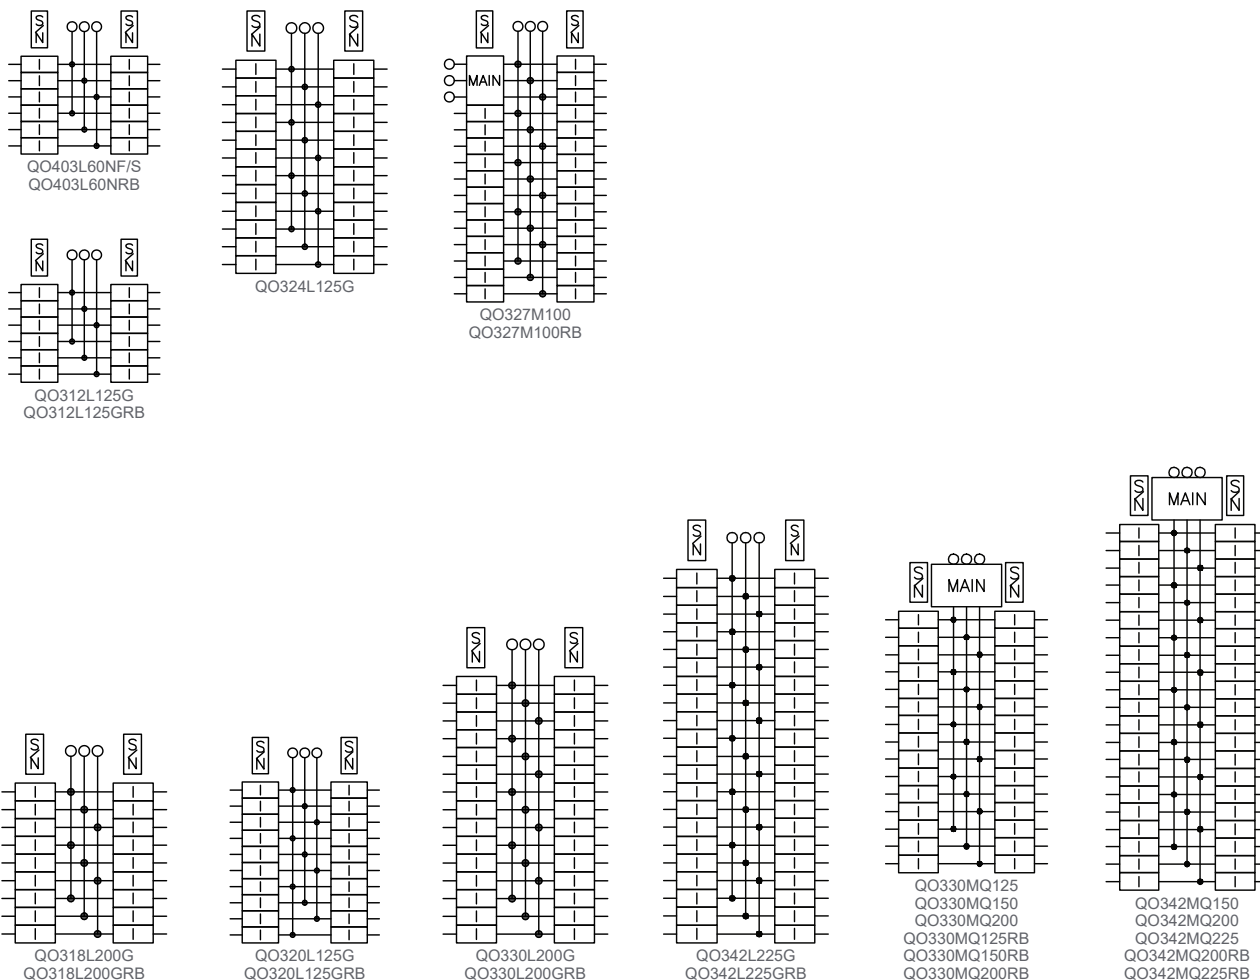

QO Value Packs, Mounting Bases and Covers


Value Packs Offer

Different value pack combinations offer an affordable mix of products for load center customers. Value packs are ideal for new construction, upgrades and remodels. Designed to meet various needs, special packs are combined for QO products.


We've got you covered: flush and surface covers

Indoor QO covers are available in surface or flush mount; these can be purchased separately and limit loss or damage if stored at the job site.

Mono-Flat covers, a high-end alternative with aesthetically pleasing design and low profile surface with concealed mounting screws and door hinges is an alternative to our standard covers.



Plug-on Neutral Load Center Value Packs

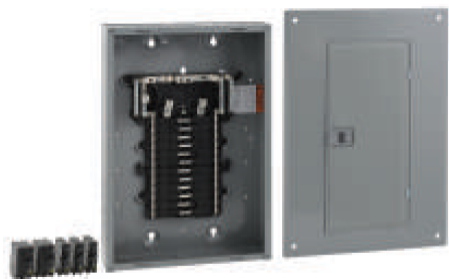

QO124L125PGCVP



QO142M200PCAFVP

Table 26 - Plug-on Neutral Indoor Load Center Value Packs (Compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits ⁸⁴	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. ⁸⁵
				Cat. No.	Included Load Center/Circuit Breakers	Cat. No.	Al	Cu	
QO (Accepts Only QO Plug-On Circuit Breakers) QO — Copper Bus; Convertible Mains — Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs or QOM Main Circuit Breaker									
125 A	24	34	10	QO124L125PGCVP	(1) QO124L125PGC (3) QO120 (2) QO230	PKGTALP1 Included	6-2/0		7
225 A	42	52		QO142L225PGCVP	(1) QO142L225PGC (3) QO120 (2) QO230	PKGTALP2 Included	4-300		11
Convertible Mains — Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible appropriate to Main Lugs or Main Circuit Breaker									
100 A	24	34	10	QO124M100PCVP	(1) QO124M100PC (3) QO120 (2) QO230	PK15GTA	6-2/0		7
	32	38	6	QO132M100PCVP	(1) QO132M100PC (3) QO120 (2) QO230	PK18GTA			8
200 A	42	52	10	QO142M200PCVP	(1) QO142M200PC (3) QO120 (2) QO230	PK23GTA	4-300		11
				QO142M200PCAFVP	(1) QO142M200PC (3) QO120 (2) QO230 (3) QO115PCAFI				

84. Maximum single pole branch circuits utilizing QO and/or QOT (20 A MAX. NON-CTL) circuit breakers.

85. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

Table 27 - Plug-on Neutral with Qwik-Grip Indoor Load Center Value Packs (Compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. 86
				Cat. No.	Included Load Center/ Circuit Breakers	Cat. No.	Al	Cu	
QO Convertible Mains — Factory-Installed Main Lugs, up to 65 kA Short Circuit Current Rating — Copper Bus, QOM1 Main Frame Size, Convertible to Main Circuit Breaker									
125 A	24	34	10	QO124L125PQGCV	(1) QO124L125PQGC (3) QO120 (2) QO230 and (1) PKQGA Qwik-Grip assembly kit	PKGTALP1	6-2/0		7Q
QO Convertible Mains — Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating — Copper Bus, QOM2 Main Frame Size, Convertible to Main Lugs or Main Circuit Breaker									
200 A	42	52	10	QO142M200PQCV	(1) QO142M200MQC (3) QO120 (2) QO230 and (1) PKQGA Qwik-Grip assembly kit	PK23GTA	4-300		11Q

86. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

QO Mounting Bases — UL Recognized Components


Table 28 - QO Mounting Bases



SK9795



QON2L40



QON112L125PI



QON318L200



QON3B

Voltage System	Main Lug Rating	Spaces	Max. No. 1P Circuits	Mounting Bases Cat. No.	Main Wire Size AWG/kcmil	
QO Plug-On Mounting Bases — (Only accepts QO plug-on circuit breakers. Not compatible with QO plug-on neutral circuit breakers.)						
1Ø2W 240 Vac Max. 10 k AIC (without neutral assembly)	70 A	2	2	QON2L70	14–2/0 Cu, 12–2/0 Al	
	125 A	4	4	SK9948BW	12–2/0 Al	
				SK9842		
		6	6	SK9795		
				SK9801		
8	8	8	SK9796BW	8–3/0 Cu/Al		
SK9797						
QO Plug-On Mounting Bases — (Only accepts QO plug-on circuit breakers. Not compatible with QO plug-on neutral circuit breakers.)						
1Ø3W 240 Vac Max. 10 I AIC	40 A	2	2	QON2L40	14–2/0 Cu, 12–2/0 Al	
	70 A		4	QON24L70		
	100 A	6	12	QON612L100	8–1/0 Cu/Al	
		8	16	QON816L100		
QO Plug-On Neutral Mounting Bases — (Compatible with QO plug-on circuit breakers and QO plug-on neutral circuit breaker.)						
1Ø3W 240 Vac Max. 10 k AIC	125 A	12	24	QON112L125PI	6–2/0 Cu/Al	
		20		QON120L125PI		
	200 A	12		QON112L200PI	4–250 Cu/Al	
		24		QON124L200PI		
		30	QON124L200PDL	(2) 4–300 Cu/Al		
		40	QON120L200PI	4–250 Cu/Al		
	225 A	42	52	QON142L225PI	4–300 Cu/Al	
		54	72	QON154L225P		
		60		QON160L225P		
QO Plug-On Mounting Bases — (Only accepts QO plug-on circuit breakers. Not compatible with QO plug-on neutral circuit breakers.)						
3Ø3W 240 Vac Max. 10 k AIC (without neutral assembly)	125 A	12	12	QON312L125	6–2/0 Cu/Al	
		20	20	QON320L125		
		24	24	QON324L125		
	200 A	18	18	QON318L200	4–250 Cu/Al	
		24	24	QON324L200		
		30	30	QON330L200		
		42	42	QON324L205		
	225 A					
	QO Plug-On Mounting Bases — (Only accepts QO plug-on circuit breakers. Not compatible with QO plug-on neutral circuit breakers.)					
	3Ø4W 240 Vac Max. 10 k AIC	60 A	3	3	QON403L60N	14–1 Cu, 12–1 Al
125 A		12	12	QON312L125I	6–2/0 Cu/Al	
		20	20	QON320L125I ⁸⁷		
		24	24	QON324L125I		
200 A		30	30	QON330L200I ⁸⁷	4–250 Cu/Al	
225 A	42	42	QON342L225I	4–300 Cu/Al		
QO Plug-On Mounting Bases — (Only accepts QO plug-on circuit breakers. Not compatible with QO plug-on neutral circuit breakers.)						

87. Also IEC rated and CE marked for IEC 60439-1. Use only Square D brand Type QOXC, QOXD, QOHX and QOE circuit breakers for 415Y/240 Vac max. systems.

Table 28 - QO Mounting Bases (Continued)

Voltage System	Main Lug Rating	Spaces	Max. No. 1P Circuits	Mounting Bases Cat. No.	Main Wire Size AWG/kcmil
1Ø2W 240 Vac Max. 10 k AIC (without neutral assembly)	70 A	1	1	QOMB1	14-2/0 Cu, 12-2/0 Al
		2	2	QOMB2	
		3	3	QOMB3	
QOB Bolt-On Mounting Bases — (Only accepts QOB bolt-on circuit breakers)					
1Ø2W 240 Vac Max. 10 k AIC (without neutral assembly)	100 A	3	3	QON3B	14-1 Cu, 12-1 Al

Solid Neutral Assemblies

Table 29 - Solid Neutral Assemblies


Main Lug Rating	Number of Branch Neutral Terminals	Cat. No.	Main Neutral Lug Wire Size AWG/kcmil	Branch Neutral Terminal Wire Size	
				Cu	Al
125 A	12	SN12125	4-2/0 AWG	14-4 AWG	12-4 AWG
	20	SN20			
200 A	12	SN12200	4 AWG-300 kcmil		
	30	SN30			
225 A	42	SN42			



SN30



SN42



SN12125



SN12200

Accessories for US Mounting Base for UL 489 C60

Table 30 - Accessories for US Mounting Base for UL 489 C60



Description	Cat. No.
Main lug kit for US mounting bases, 1 lug per kit, for 6 AWG to 300 kcmil cable	USMBLK
Terminal cover for US mounting base; provides IP20 ingress protection per IEC 60529; suitable for jumper bars or cable	USMBTC

QO Load Center Covers



QOC40UFW



QOC20UFWG



QOCMF42UCW

Table 31 - QO Load Center Covers

Mains Ratings	Spaces	QO Standard Covers			QO Mono-Flat Covers	
		Flush	Surface	Flush	Gray	White
		Gray Covers		White Covers		
QO 1-Phase Load Center Covers — Convertible Mains						
100 A	12	QOC12UF	QOC12US	—	—	—
	16	QOC20U100F	QOC20U100S	QOC20U100FW	—	—
	20	QOC20U100F	QOC20U100S	QOC20U100FW	—	—
	24	QOC24UF	QOC24US	QOC24UFW	—	—
	32	QOC32UF	—	QOC32UFW	—	—
125 A	12	QOC16UF	QOC16US	QOC16UFW	—	—
	16	QOC24UF	QOC24US	QOC24UFW	—	—
	20	QOC20U100F	QOC20U100S	QOC20U100FW	—	—
	24	QOC24UF	QOC24US	QOC24UFW	—	—
	30	QOC30U125C	—	—	—	—
	32	QOC32UF	—	QOC32UFW	—	—
150 A	20	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	24	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	30	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	32	QOC40UF	QOC40US	QOC40UFW	—	—

Table 31 - QO Load Center Covers (Continued)

Mains Ratings	Spaces	QO Standard Covers			QO Mono-Flat Covers	
		Flush	Surface	Flush	Gray	White
		Gray Covers		White Covers		
200 A	12	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	20	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	24	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	30	QOC30UF	QOC30US	QOC30UFW	QOCMF30UC	QOCMF30UCW
	40	QOC40UF	QOC40US	QOC40UFW	—	—
	42	QOC42UF	QOC42US	QOC42UFW	QOCMF42UC	QOCMF42UCW
	54	QOC54UF	—	QOC54UFW	QOCMF54UC	QOCMF54UCW
	60	QOC60UF	—	—	QOCMF60UC	QOCMF60UCW
225 A	40	QOC42UF	QOC42US	QOC42UFW	QOCMF42UC	QOCMF42UCW
	42	QOC42UF	QOC42US	QOC42UFW	QOCMF42UC	QOCMF42UCW
	54	QOC54UF	—	QOC54UFW	QOCMF54UC	QOCMF54UCW
QO Rise Panel (Wide Gutter) Covers						
125 A	12	QOC20UFWG	—	QOC20UFWGW	NQC20FWG	NQC20FWGW
	20	QOC20UFWG	—	QOC20UFWGW	NQC20FWG	NQC20FWGW
200 A	24	QOC30UFWG	—	QOC30UFWGW	NQC30FWG	NQC30FWGW
	30	QOC30UFWG	—	QOC30UFWGW	NQC30FWG	NQC30FWGW
QO 3-Phase Load Center Covers — Fixed Mains						
125 A	12	QOC16UF	QOC16US	QOC16UFW	—	—
	20	QOC24UF	QOC24US	QOC24UFW	—	—
	24	QOC24UF	QOC24US	QOC24UFW	—	—
200 A	18	QOC30UF	QOC30US	QOC30UFW	—	—
	30	QOC30UF	QOC30US	QOC30UFW	—	—
225 A	42	QOC42UF	QOC42US	QOC42UFW	—	—
QO 3-Phase Load Center Covers — Convertible Mains						
100 A	27	QOC30UF	QOC30US	QOC30UFW	—	—
125 A	30	QOC342MQF	QOC342MQS	—	—	—
150 A	30	QOC342MQF	QOC342MQS	—	—	—
	42	QOC342MQF	QOC342MQS	—	—	—
200 A	30	QOC342MQF	QOC342MQS	—	—	—
	42	QOC342MQF	QOC342MQS	—	—	—
225 A	42	QOC342MQF	QOC342MQS	—	—	—

Homeline Load Centers


Homeline Product Description

This section provides an overview of the Homeline Load Center features, an overview of the catalog number guide, and general information about the product.

Introduction to Homeline Load Centers

Homeline Load Centers are built on Square D reputation for reliability, innovation, and leadership in circuit protection.

Homeline Load Centers from Square D are UL Listed panelboards. They are designed to meet residential requirements to help protect electrical systems, equipment, and people.

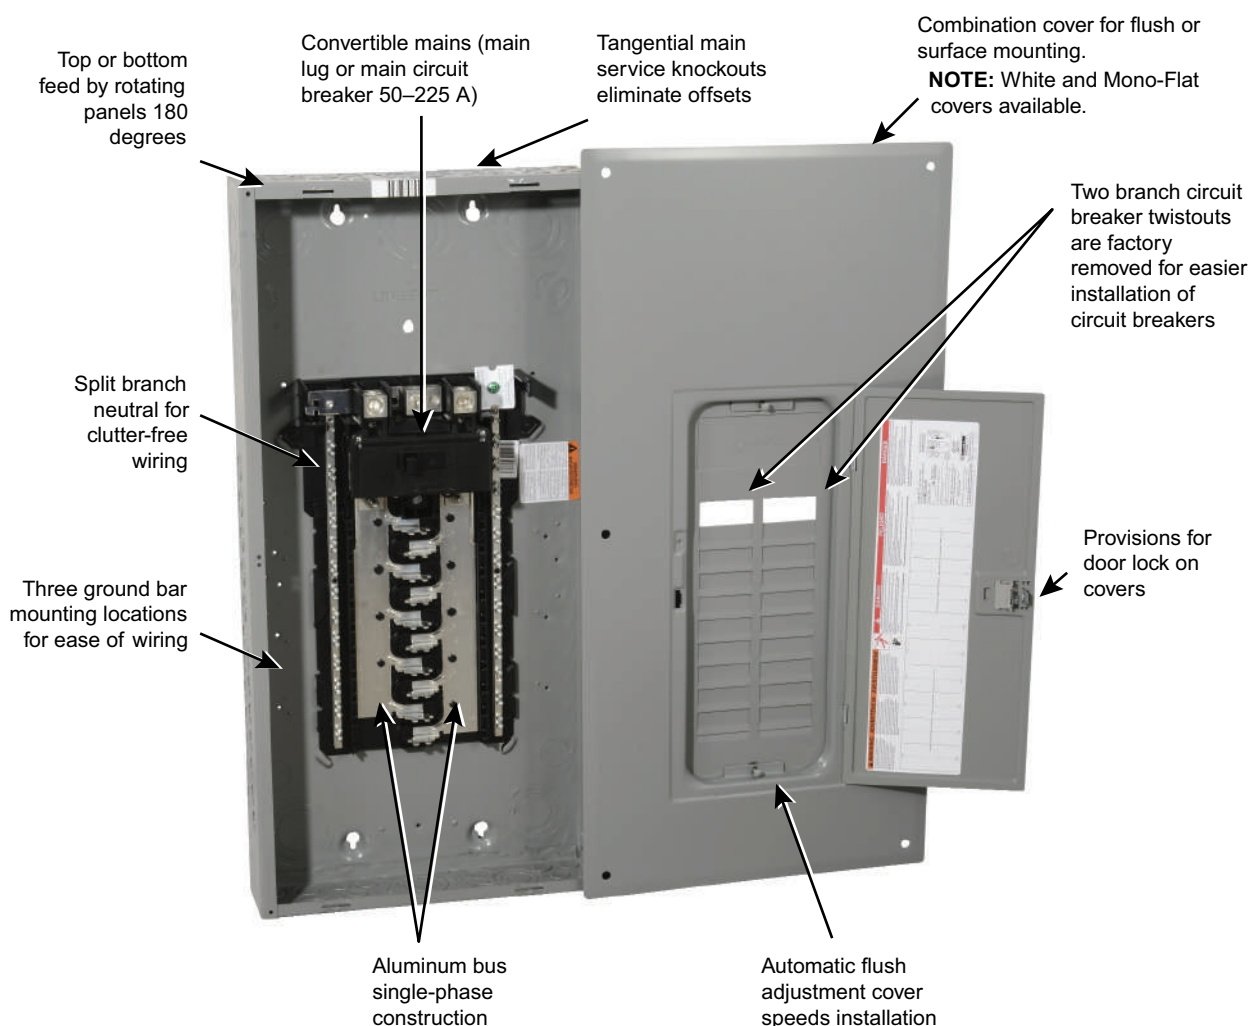

Other Features:

UL Listed Only for Square D Breakers: 1-in. format breakers trip to center position.



Standard 22 kA / 10 kA AIR SCCR: Standard 22/10 kA AIR series rating on main circuit breaker panels increases application capability (branch circuit breakers 10 kA / main circuit breaker 22 kA).

Hinges and ground bars: Side hinge doors on outdoor convertible main panels. Equipment grounding bar included with main lug load centers.

Screws: Single captive screw interior mounting on indoor panels to ease removal. Combination slot/square drive neutral, ground, and cover screws for positive drive and improved torque.

Accepts Plug-on Neutral (PoN) CAFI and Dual Function Breakers, and circuit breakers with pigtails

Catalog Number Guide — Homeline Load Centers

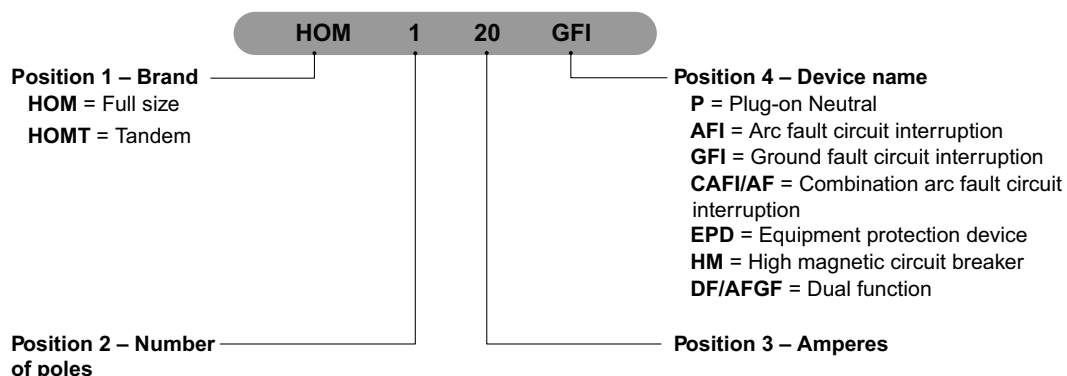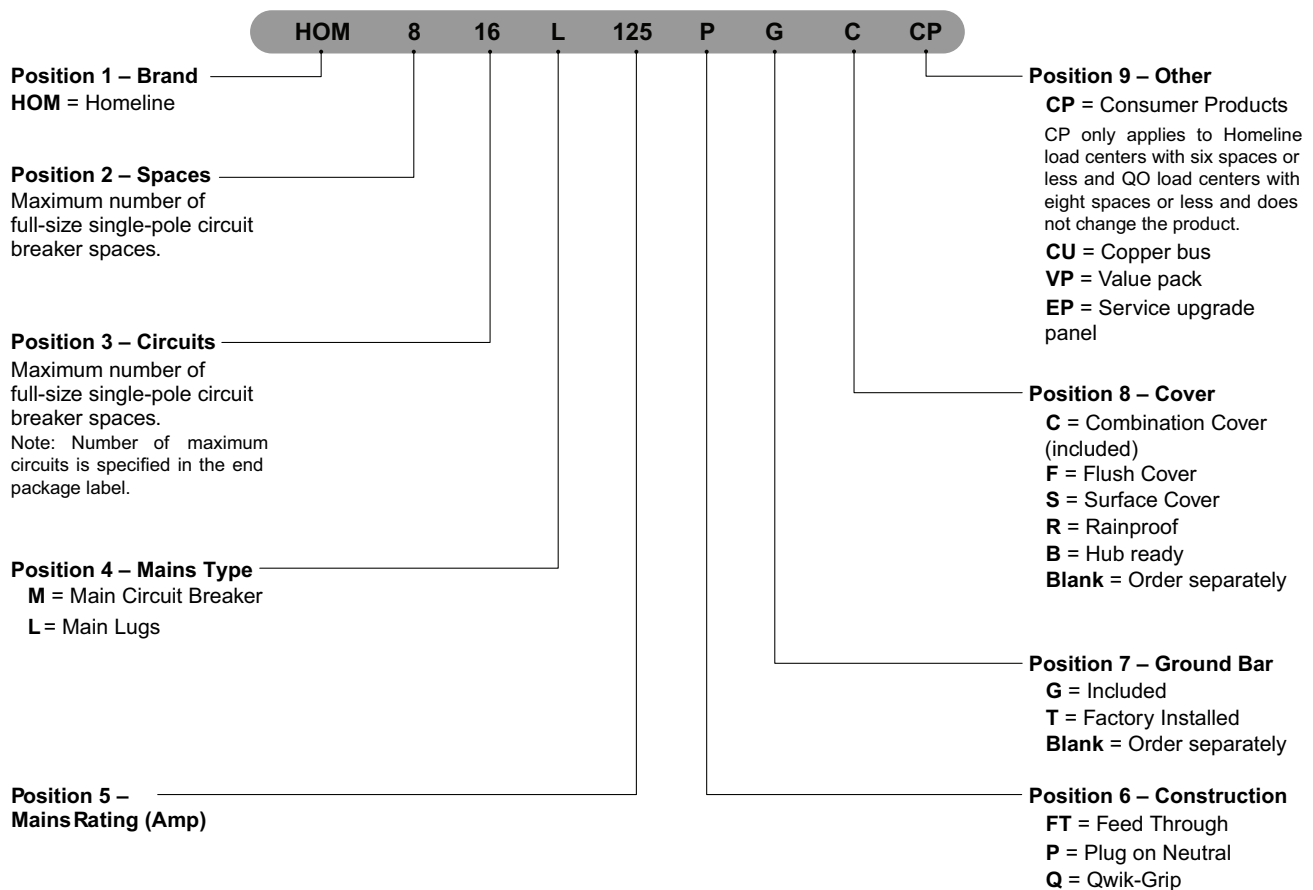

General Information



HOM3060L125PC



HOM230

Type:

Circuit breaker load centers for use on AC systems. They are UL Listed under file E-6294 (panelboards) and meet Federal Specifications W-P-115b NEMA Type 1, Class 2.

Service:

120 Vac, 1Ø2W
 120 / 240 Vac, 1Ø3W

Ratings:

Main lugs: 70–225 A
 Main circuit breaker: 50–225 A

UL Listed:

- File E-6294 (panelboards)
- UL 67 Standard for Panelboards establishes requirements for electrical distribution panels
- Suitable for use as service equipment
- 75°C wire rating

Class CTL:

UL Listed Class CTL load centers

Meets the 2020 National Electrical Code (NEC) article for Lighting and Appliance Branch Circuit panelboards

Main Circuit Breaker Kits:

50–225 A main circuit breaker kit is 22,000 AIR series rated with 10,000 AIR branch circuit breakers.

Table 32 - Branch Circuit Breakers

10,000 AIR	
HOM	1-pole, 15–50 A
	2-pole, 15–125 A
HOMT	1-pole, 15–30 A
	2-pole, 15–50 A
HOM-GFI	1-pole, 15–20 A
	2-pole, 15–50 A
HOM-AFI	1-pole, 15–20 A
HOM-CAFI	1-pole, 15–20 A
	2-pole, 15–20 A
HOM-P	1-pole, 15–20 A
HOM-BB	2-pole, 150–200 A
HOM-DF	1-pole, 15–20 A
HOM-HM	1-pole, 15–20 A
HOM-EPD	1-pole, 15–20 A
	2-pole, 15–50 A

Homeline Indoor and Outdoor Load Centers

NEMA Type 1 – Indoor

NEMA Type 1 enclosures are typically used to help protect controls and terminations from objects and personnel. This style of enclosure, while offering a latching door, does not have a gasket sealing surface. NEMA 1 enclosures are used in applications where sealing out dust, oil, and water is not required.



NEMA Type 3R – Rainproof

NEMA Type 3R enclosures are typically used in outdoor applications for wiring and junction boxes. This style of enclosure help provide protection against falling rain, sleet, snow, and external ice formation. In an indoor application, this can help protect against dripping water. This style of enclosure does not have a gasket sealing surface. Some models have hasps for padlocking.



Indoor Enclosures (NEMA Type 1)




Homeline Plug-on Neutral Load Centers

Homeline plug-on neutral load centers offer time-savings for plug-on neutral combination arc fault (CAFI) and dual function circuit breaker installation. Our innovative, split neutrals are designed to save you time and wire, allowing plug-on neutral circuit breakers to connect directly to the neutral bar without the pigtail.



Qwik-Grip wire management system available

Save time and simplify your work by eliminating knockouts, installing wire connectors and help prevent pulling wire into the load center.



Material, Finish, and Knockouts

The enclosures are sheet steel with knockouts at the top, bottom, back, and sides. Homeline finish consists of gray baked enamel electrodeposited over cleaned, phosphatized steel. Most indoor enclosures are 14.25 in. (362 mm) wide. Homeline enclosures can be rotated to allow top or bottom feed. Homeline load center interiors have tin and copper plated aluminum bus bars.



Flush and surface covers

Indoor Homeline covers with latch are available in surface or flush mount and are included with our load centers. Doors to cover circuit breaker handles, except on 2-4, 4-8, and 6-12 circuit models. Triple lead covers crews for fast cover installation.



Filter plates

Snap-in style filler plates are accessories purchased separately available to cover unused spaces. HOMFP and QOFP filler plates available for branch circuit breaker spaces in all covers. QOM1FP filler plates available for 100-125 A convertible load center covers. QOM2FP filler plates available for 150-225 A convertible load center covers.



Different colors and styles


Homeline covers are available in gray and white colors. Mono-Flat covers, a high-end alternative with aesthetically pleasing design and low profile surface with concealed mounting screws and door hinges are an alternative to the standard covers.

Outdoor Enclosures (NEMA Type 3R)



Homeline Plug-on Neutral

Homeline plug-on neutral load centers offer time-savings for plug-on neutral combination arc fault (CAFI) and dual function circuit breaker installation. These innovative, split neutrals are designed to save you time and wire, allowing plug-on neutral circuit breakers to connect directly to the neutral bar without the pigtail.



Material, Finish, and Knockouts

Galvannealed steel enclosure includes interior trim and door with a gray baked enamel electrodeposited over cleaned, phosphatized steel. Homeline load center interiors have tin and copper plated aluminum bus bars.



Stainless steel latch

Stainless steel door latch on the enclosure provides a secure closure and maximum durability.



Wiring access without door removal

Convertible main panels are side-hinge door devices, providing full wiring access without door removal.



Bolt-On Hubs

NEMA 3R — are rainproof devices have provisions for interchangeable bolt-on hub. Square D type rain-tight bolted hubs provide fast and convenient top feed conduit connection. Hubs are available for 0.75 in. (19 mm) to 4 in. (102 mm) conduit size. No gasket is required with hubs from 0.75 in. (19 mm) to 2.50 in. (64 mm) when used on NEMA Type 3R load centers.

Fixed Mains vs. Convertible Mains — Single Phase

Table 33 - Single-Phase — Homeline Load Centers, Fixed Mains (70–125 A)



Indoor NEMA 1	Rainproof NEMA 3R
	
Standards	
UL 67 Listed <ul style="list-style-type: none"> • File E-6294 • 75°C wire rating 	
Short Circuit Current Rating	
Main lugs: up to 10,000 AIR	
Interior	
Tin plated aluminum bus	
Mains	
<ul style="list-style-type: none"> • Factory-installed fixed main lugs • Top mains positioning only • Top or bottom feed • A backfed main circuit breaker can be field installed in a 6-12 load center using the HOM1RK retaining kit 	
Covers	
Flush and surface cover	

Table 34 - Single-Phase — Homeline Load Centers, Convertible Mains (100–225 A)



Indoor NEMA 1	Rainproof NEMA 3R
	
Standards	
UL 67 Listed <ul style="list-style-type: none"> • File E-6294 • Suitable for use as service equipment • 75°C wire rating 	
Short Circuit Current Rating	
<ul style="list-style-type: none"> • Main lugs: up to 10,000 AIR • Main circuit breaker: 22,000 AIR standard 	
Interior	

Table 34 - Single-Phase — Homeline Load Centers, Convertible Mains(100–225 A) (Continued)

Indoor NEMA 1		Rainproof NEMA 3R	
<ul style="list-style-type: none"> • Tin plated aluminum bus • Removable interior with single, captive mounting screw • Split branch neutral with up to 50% more terminations than required • Multiple mounting locations for equipment ground bar kits: left, right, bottom 			
Mains			
Factory-installed main lugs convertible to main circuit breaker			
Load Center Amperage		Main Circuit Breaker Kit Amperage	
125		50–125	
150		10–150	
200		100–200	
225		100–225	
Factory-installed main circuit breaker convertible to main lugs			
Main Circuit Breaker Amperage	Main Lug Kit Amperage	Load Center Amperage	
100	125	100	
125	125	125	
150	225	150	
200	225	200	
225	225	225	
Covers			
<ul style="list-style-type: none"> • Combination flush and surface cover included with load centers • Optional door lock kit for indoor load centers • Easy to open door latch 			

Technical Information

Indoor, HOM Fixed Mains (70-125 A) — Main Lugs



HOM24L70F



HOM612L100F



HOM48L125GC

Table 35 - HOM Standard Load Center Main Lugs, Fixed Mains (1Ø3W—120/240 Vac Indoor—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ⁸⁸	Max. Tandem Circuit Breakers	Load Center Box, Interior ⁸⁹	Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. ⁹⁰
					Al	Cu		
Main Lugs—10 kA Short Circuit Current Rating Order HOM Circuit Breakers								
70 A	2	4	2	HOM24L70F/S ^{91, 92}	12–3	14–4	PK3GTA1	2
100 A	6	12	6	HOM612L100F/S ^{91, 93}	6–2/0	8–1	PK7GTA	4
125 A	4	8	4	HOM48L125GC	12–2/0	14–2/0	PK7GTA included	21

88. Maximum single pole branch circuits utilizing HOM and/or HOMET circuit breakers.

89. C at end of catalog number indicates combination flush/surface cover included with device.

90. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

91. F/S at end of catalog number indicates to order F for flush device or S for surface device. The cover does not have a door.

92. HOM-GFI and HOM-AFI branch circuit breakers are limited to number 10 maximum wire.

93. 70 A maximum branch circuit breaker, 100 A maximum back feed main circuit breaker.

Indoor, HOM Convertible Mains (125–225 A) — Main Lugs



HOM2040L225PGC



HOM4284L225PGC

Table 36 - HOM Plug-on Neutral Load Center Main Lugs, Convertible Mains (1Ø3W-120/240 Vac Indoor—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ⁹⁴	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover ⁹⁵	Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. ⁹⁶	
					Al	Cu			
Convertible Mains—Factory-installed Main Lugs									
QOM1 Main Frame Size—Convertible to Main Circuit Breaker									
125 A	8	16	8	HOM816L125PC	6-2/0	6-1	PK9-27GTA(L)	6	
	12	24	12	HOM1224L125PC					
	16	32	16	HOM1632L125PC				6-1/0	8
	20	40	20	HOM2040L125PC					
	30	60	30	HOM3060L125PC					
Convertible Mains—Factory-installed Main Lugs									
QOM2 Main Frame Size—Convertible to Main Circuit Breaker									
225 A	30	60	30	HOM3060L225PC	4-300	4-250	PK9-27GTA(L)	10	
	40	80	40	HOM4080L225PC				12	
	42	84	42	HOM4284L225PC					
	60	120	60	HOM60120L225PC					25
Convertible Mains—Factory-installed Main Lugs—Ground Bar Included									
QOM1 Main Frame Size—Convertible to Main Circuit Breaker									
125 A	8	16	8	HOM816L125PGC	6-2/0	6-1	PKGTALP1 Included	6	
	12	24	12	HOM1224L125PGC					
	20	40	20	HOM2040L125PGC				6-1/0	8
	24	80	24	HOM2448L125PGC					
Convertible Mains—Factory-installed Main Lugs—Ground Bar Included									
QOM2 Main Frame Size—Convertible to Main Circuit Breaker.									
225 A	30	60	30	HOM3060L225PGC	4-300	4-250	PKGTALP2 Included	10	
	16	32	16	HOM1632L225PGC				PKGTALP1 Included	9
	20	40	20	HOM2040L225PGC					
	40	80	40	HOM4080L225PGC			PKGTALP3 Included		
	42	84	42	HOM4284L225PGC					

94. Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.
 95. C at end of catalog number indicates combination flush/surface cover included with device.
 96. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

Indoor, HOM Convertible Mains (100–200 A) — Main Breaker



HOM3060M125PC



HOM4284M225PC

Table 37 - HOM Plug-on Neutral Load Center Main Breaker, Convertible Mains (1Ø3W–120/240 Vac Indoor—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ⁹⁷	Max. Tandam Circuit Breakers	Load Center Box, Interior and Cover ⁹⁸	Main Wire Size AWG/ kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. ⁹⁹
					Al	Cu		
Main Circuit Breaker—22 kA Short Circuit Current Rating								
Convertible Mains—Factory-installed Main Circuit Breaker								
QOM1 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker								
100 A	8	16	8	HOM816M100PC	6-1	6-3	PK9-27GTA(L)	5
	12	24	12	HOM1224M100PC		6-2/0		6
	20	40	20	HOM2040M100PC		6-3		7
	24	48	24	HOM2448M100PC	6-2/0			8
	30	60	30	HOM3060M100PC	6-2/0			10
125 A	24	48	24	HOM2448M125PC	6-2/0	6-1/0	PK9-27GTA(L)	8
	30	60	30	HOM3060M125PC		6-2/0		10
Convertible Mains—Factory-installed Main Circuit Breaker								
QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker								
150 A	30	60	30	HOM3060M150PC	4-250		PK9-27GTA(L)	10
200 A	20	40	20	HOM2040M200PC	4-250			9
	30	60	30	HOM3060M200PC				10
	40	80	40	HOM4080M200PC				12
	42	84	42	HOM4284M200PC				12
	60	120	60	HOM60120M200C				25
225 A	42	84	42	HOM4284M225PC	4-300	4-250	12	

97. Maximum single pole branch circuits utilizing HOM and/or HOMET circuit breakers.
 98. C at end of catalog number indicates combination flush/surface cover included with device.
 99. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

Indoor, HOM Convertible Mains (125–200 A with Qwik-Grip)

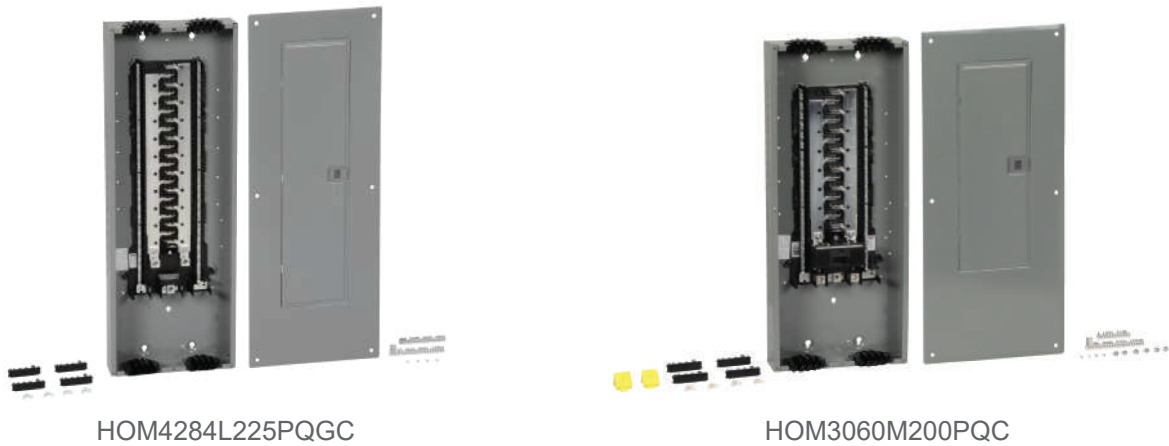


Table 38 - HOM Plug-on Neutral Load Centers with Qwik-Grip (1Ø3W–120 / 240 Vac Indoor— UL Listed)

Mains Rating	Spaces	Max. 1P Circuit	Max. Tandem Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/kcmil		Equipment Ground Bar Kit	Box No.
					Al	Cu		
125 A	34	48	24	HOM2448L125PQGC	6–2/0	6–1/0	PKGTALP2 included	8Q
	40	60	30	HOM3060L125PQGC		6–2/0		10Q
Convertible Mains—Factory-Installed Main Lugs, 10 kA Short Circuit Current Rating— QOM2 Main Frame Size, Convertible								
225 A	30	60	30	HOM3060L225PQGC	4–300	4–250	PKGTALP2 included	10Q
	40	80	40	HOM4080L225PQGC				PKGTALP3 included
	42	84	42	HOM4284L225PQGC				
Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating— QOM2 Main Circuit Breaker Frame Size, Convertible to Main Lugs or Main Circuit Breaker								
200 A	30	60	30	HOM3060M200PQC	4–250		PK9-27GTA(L)	10Q
	40	80	40	HOM4080M200PQC				
	42	84	42	HOM4284M200PQC	4–300	4–250		12Q

Table 39 - Homeline Service Upgrades Load Centers (1Ø3W—120/240 Vac Special Applications—UL Listed)

Mains Rating	Spaces	Max. 1P Circuits ¹⁰⁰	Max. Tandem Circuit Breakers	Load Center Box and Interior	Extra Long Cover with Door (Order Separately)		Main Wire Size AWG/ Kcmil		Equipment Ground Bar Kit (Order Separately)	Box No. ¹⁰¹
					Flush	Surface	Al	Cu		
Convertible Mains—Factory-Installed Main Circuit Breaker—22 KA QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker —Copper Bus ¹⁰²										
200 A	30	60	30	HOM3060M200PCEP ¹⁰³	HOMC30UFL	—	4–250	PK9-27GTA(L)	26	

100. Maximum single pole branch circuits utilizing QO and/or QOT circuit breakers.

101. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

102. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

103. Ships with standard length cover.

1Ø, Field-Installed Mains Kits

**Table 40 - Field-Installed Main Circuit Breaker Kits, 1Ø
QOM1 Frame Size — (Use with Convertible Main Load Centers only)**



QOM50VH

Main Circuit Breaker Rating ¹⁰⁴	Convertible Load Center Mains Rating	22 k AIR ¹⁰⁵	Lug Wire Size AWG/kcmil ¹⁰⁶
		Main Circuit Breaker	
50 A	100–125	QOM50VH	12–2/0 Al or Cu
60 A		QOM60VH	
70 A		QOM70VH	
80 A		QOM80VH	
90 A		QOM90VH	
100 A		QOM100VH	
110 A	125	QOM110VH	
125 A		QOM125VH	

**Table 41 - Field-Installed Main Circuit Breaker Kits, 1Ø
QOM2 Frame Size — (Use with Convertible Main Load Centers only)**



QOM2100VH

Main Circuit Breaker Rating ¹⁰⁴	Convertible Load Center Mains Rating	22 k AIR ¹⁰⁵	Lug Wire Size AWG/kcmil ¹⁰⁶
		Main Circuit Breaker ¹⁰⁷	
100 A	150–225	QOM2100VH	4–300 Al or Cu
125 A		QOM2125VH	
150 A		QOM2150VH	
175 A	200–225	QOM2175VH	
200 A		QOM2200VH	
225 A		QOM2225VH	

Table 42 - Field-Installed Main Lug Kits, 1Ø



QOL125

Field-Installed Main Type	Frame Size	Main Ampere Rating ¹⁰⁴	Use on Convertible Load Center with Mains Rating	Cat. No.	Lug Wire Size ¹⁰⁶ AWG/kcmil
Main Lugs ¹⁰⁸	—	125 A	100–125 A	QOL125	6–2/0 Al or Cu
				QOL125VD	4–4/0 Al or Cu
	—	225 A	150–225 A	QOL225	6–300 Al or Cu

104. Do not exceed the load center mains rating.

105. 22 k AIR main circuit breaker UL Listed for use ahead of QO, QOT and QO-PL 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

106. Wire range listed for QOM circuit breaker kits is the wire range of that circuit breaker. To find out maximum wire size permitted in a particular load center per UL, see Main Wire Size in that load center table.

107. Add suffix 1021 for 120, 208 or 240 Vac shunt trip.

108. If main circuit breaker knockout has been removed from the load center's trim, order appropriate filler plate from QO/Homeline Accessories, page 72.

Rainproof, HOM Fixed and Convertible Mains (70–225 A) Main Lugs



Table 43 - HOM Standard Load Center Main Lugs, Fixed Mains (1Ø3W–120/240 Vac Rainproof UL—Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ¹⁰⁹	Max. Tandam Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/ kcmil		Equipment Ground Bar Kit (Order Separately)	Box No.
				Cat. No. (DE3C)	Al	Cu	Cat. No. (DE3A)	
Main Lugs—10 kA Short Circuit Current Rating								
Factory-installed Fixed Main Lugs, 10 kA Short Circuit Current Rating								
70 A	2	4	2	HOM24L70RB ¹¹⁰	12–3	14–4	PK4GTA	1R
100 A	6	12	6	HOM612L100RB ¹¹¹	8–1		PK7GTA	2R
125 A	4	8	4	HOM48L125GRB	12–2/0	14–2/0	PK7GTA Included	15R

Table 44 - HOM Plug-on Neutral Load Center Main Lugs, Convertible Mains (1Ø3W–120/240 Vac Rainproof UL—Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ¹¹²	Max. Tandam Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/ kcmil		Equipment Ground Bar Kit (Order Separately)	Box No.
				Cat. No. (DE3C)	Al	Cu	Cat. No. (DE3A)	
Convertible Mains with Factory-installed Main Lugs ¹¹², QOM1 Main Frame Size—Convertible to Main Circuit Breaker								
125 A	8	16	8	HOM816L125PRB	6–2/0	6–1	PK9-27GTA(L)	3R
	12	24	12	HOM1224L125PRB				
	20	40	20	HOM2040L125PRB				
	24	48	24	HOM2448L125PRB				
Convertible Mains with Factory-installed Main Lugs ¹¹³, QOM2 Main Frame Size—Convertible to Main Circuit Breaker								
225 A	12	12	0	HOM12L225PRB	4–300	4–250	PK9-27GTA(L)	5R
	16	32	16	HOM1632L225PRB				
	20	40	20	HOM2040L225PRB				
	30	60	30	HOM3060L225PRB				
	40	80	40	HOM4080L225PRB				
	42	84	42	HOM4284L225PRB				

109. Maximum single pole branch circuits utilizing HOM and/or HOMT circuit breakers.
 110. HOM-GFI and HOM-AFI branch circuit breakers are limited to number 10 maximum wire.
 111. 70 A maximum branch circuit breaker, 100 A maximum back feed main circuit breaker.
 112. Side hinge door device allow 1-1/4 in. on left side for door to open.
 113. Convertible mains with factory-installed main lugs, QOM2 main frame size—convertible to main circuit breaker.

Rainproof, HOM Convertible Mains (100–200 A) — Main Breaker



HOM2448M125PRB



HOM3060M200PRB

Table 45 - HOM Plug-on Neutral Load Center Main Breaker, Convertible Mains (1Ø3W–120/240 Vac Rainproof—UL Listed)

Mains Rating	Spaces	Max. Single Pole Circuits ¹¹⁴	Max. Tandam Circuit Breakers	Load Center Box, Interior and Cover	Main Wire Size AWG/kcmil		Equipment Ground Bar Kit (Order Separately)	Box No.
				Cat. No. (DE3C)	Al	Cu	Cat. No. (DE3A)	
Main Circuit Breaker—22 kA Short Circuit Current Rating Convertible Mains with Factory-Installed Main Circuit Breaker, QOM1 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker ¹¹⁵								
100 A	8	16	8	HOM816M100PRB	6–2/0	6–1	PK9-27GTA(L)	3R
	12	24	12	HOM1224M100PRB				4R
	20	40	20	HOM2040M100PRB				
125 A	8	16	8	HOM816M125PRB				3R
	24	48	24	HOM2448M125PRB				6R
Convertible Mains with Factory-installed Main Circuit Breaker, QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker								
150 A	30	60	30	HOM3060M150PRB	4–250		PK9-27GTA(L)	7R
200 A	12	12	0	HOM12M200PRB				5R
	20	40	20	HOM2040M200PRB				6R
	30	60	30	HOM3060M200PRB				7R
	40	80	40	HOM4080M200PRB				14R
Convertible Mains with Factory-installed Main Circuit Breaker with Feed-thru Lugs, QOM2 Main Frame Size—Convertible to Main Lugs or Lower Amperage Main Circuit Breaker ¹¹⁶								
150 A	8	16	8	HOM816M150PFTRB	4–250		PK9-27GTA(L)	6R
200 A				HOM816M200PFTRB				

114. Maximum single pole branch circuits utilizing HOM and/or HOMET circuit breakers.

115. 22 k AIR main circuit breaker UL Listed for use ahead of HOM and HOMET 10 k AIR branch circuit breakers to permit their application on systems with up to 22 kA available fault current.

116. Side hinge door device allow 1-1/4 in. on left side for door to open.

Homeline Label Samples



Homeline Box Label Sample

<ul style="list-style-type: none"> Number of circuits maximum Enclosure catalog number Catalog number of covers; flush or surface See load center interior for the catalog number Voltage ratings Amperage rating 	<p>Wire range for lug torque data table</p>	<p>Short circuit ratings</p>	<p>Short circuit ratings and additional or replacement circuit breakers</p>	<ul style="list-style-type: none"> UL manifest Date code Plant code Label part number Manufacturer trademark
---	---	------------------------------	---	---

<p>HOMELINE™ LOAD CENTER See panelboard interior for Catalog No. / Box / Caja : 5X1855 Cover / Cubierta : HOMC12UC Bus Bar Rating / Capacidad de Barra de conexión : 125A max. Circuit max. / Max. Circuitos : 16 Type 1 Enclosure / Gabinete Tipo 1</p> <p>Main max. / Max. Línea principal : 125A See main or service disconnect rating if installed. 240 V - Max., 1Ø, 50 / 60 Hz.</p>	<p>LUG TORQUE DATA SEE CIRCUIT BREAKERS AND FIELD INSTALLED UNITS FOR WIRE RANGE AND TORQUE.</p> <table border="1"> <thead> <tr> <th>Lug type</th> <th>Wire Range (AWG/kcmil)</th> <th>Torque (lb-in)</th> </tr> </thead> <tbody> <tr> <td>Line Neutral Lug</td> <td>5-14 (2-20 AL)</td> <td>16</td> </tr> <tr> <td>Main Lug</td> <td>5-14 (2-20 AL)</td> <td>16</td> </tr> <tr> <td>Alternate</td> <td>See Main Breaker</td> <td>See Main Breaker</td> </tr> </tbody> </table> <p>BRANCH NEUTRAL, EQUIPMENT GROUNDING BAR & SERVICE GROUNDING</p> <table border="1"> <thead> <tr> <th>Terminal Type</th> <th>Wire Range (AWG)</th> <th>Torque (lb-in)</th> </tr> </thead> <tbody> <tr> <td>Branch Neutral A</td> <td>4-6 Cu/Al</td> <td>35</td> </tr> <tr> <td>Equipment Ground Bar</td> <td>6-8 Cu/Al</td> <td>35</td> </tr> <tr> <td></td> <td>8-10 Cu/Al</td> <td>25</td> </tr> <tr> <td></td> <td>10-14 Cu, 12-14 AL</td> <td>35</td> </tr> <tr> <td>Equipment Ground</td> <td>1/2-1/4 Cu</td> <td>25</td> </tr> <tr> <td>Combinations</td> <td>1/2-1/4 Cu/Al</td> <td>25</td> </tr> <tr> <td></td> <td>1/2-1/4 AL</td> <td>25</td> </tr> </tbody> </table>	Lug type	Wire Range (AWG/kcmil)	Torque (lb-in)	Line Neutral Lug	5-14 (2-20 AL)	16	Main Lug	5-14 (2-20 AL)	16	Alternate	See Main Breaker	See Main Breaker	Terminal Type	Wire Range (AWG)	Torque (lb-in)	Branch Neutral A	4-6 Cu/Al	35	Equipment Ground Bar	6-8 Cu/Al	35		8-10 Cu/Al	25		10-14 Cu, 12-14 AL	35	Equipment Ground	1/2-1/4 Cu	25	Combinations	1/2-1/4 Cu/Al	25		1/2-1/4 AL	25	<p>SHORT CIRCUIT CURRENT RATING</p> <table border="1"> <thead> <tr> <th>RMS Symmetrical Amperes x 1000 @ V - Max.</th> <th>Integral or Remote Main / Catalog Designation or Fuse Class (Max. A)</th> <th>Branch Circuit Breaker Catalog Designation (Max. A)</th> </tr> </thead> <tbody> <tr> <td>10 @ 240</td> <td>QOM.VH (125)</td> <td>HOM (100) †, HOMT, HOMP ‡</td> </tr> <tr> <td>22 @ 240</td> <td>QO-1H (125)</td> <td></td> </tr> <tr> <td>25 @ 240</td> <td>QO (125)</td> <td></td> </tr> <tr> <td>42 @ 240</td> <td>QOH</td> <td></td> </tr> <tr> <td>65 @ 240</td> <td>QO (125)</td> <td></td> </tr> <tr> <td>100 @ 240</td> <td>QJ (125)</td> <td></td> </tr> </tbody> </table> <p>† Includes suffixes: AFI, DF, EPD, and GFI. ‡ Includes suffixes: AFI and DF.</p>	RMS Symmetrical Amperes x 1000 @ V - Max.	Integral or Remote Main / Catalog Designation or Fuse Class (Max. A)	Branch Circuit Breaker Catalog Designation (Max. A)	10 @ 240	QOM.VH (125)	HOM (100) †, HOMT, HOMP ‡	22 @ 240	QO-1H (125)		25 @ 240	QO (125)		42 @ 240	QOH		65 @ 240	QO (125)		100 @ 240	QJ (125)		<p>See Circuit Breaker for voltage and Interrupting Rating. The rating is equal to the lowest Interrupting Rating of any Circuit Breaker installed. Refer to branch or main Circuit Breakers for individual ratings. Additional or Replacement Branch or Main Circuit Breaker, or Service Disconnect MUST have an Interrupting Rating equal to or greater than that of the Circuit Breaker with the lowest Interrupting Rating presently installed. See panelboard interior for Circuit Breaker types.</p> <p>UL CLASS CTL ENCLOSED PANELBOARD 8-9488</p> <p>For installation, repairs or alterations, call an electrical contractor or electrician. Maximum continuous loads not to exceed 80% of the ampere rating of any over current device installed. / Los cargas continuas no excederán el 80% de la capacidad en amperaje de cualquier equipo de sobre corriente instalado.</p> <p>SQUARE D™</p> <p>YYWVDS 15 EAV51738</p>
Lug type	Wire Range (AWG/kcmil)	Torque (lb-in)																																																										
Line Neutral Lug	5-14 (2-20 AL)	16																																																										
Main Lug	5-14 (2-20 AL)	16																																																										
Alternate	See Main Breaker	See Main Breaker																																																										
Terminal Type	Wire Range (AWG)	Torque (lb-in)																																																										
Branch Neutral A	4-6 Cu/Al	35																																																										
Equipment Ground Bar	6-8 Cu/Al	35																																																										
	8-10 Cu/Al	25																																																										
	10-14 Cu, 12-14 AL	35																																																										
Equipment Ground	1/2-1/4 Cu	25																																																										
Combinations	1/2-1/4 Cu/Al	25																																																										
	1/2-1/4 AL	25																																																										
RMS Symmetrical Amperes x 1000 @ V - Max.	Integral or Remote Main / Catalog Designation or Fuse Class (Max. A)	Branch Circuit Breaker Catalog Designation (Max. A)																																																										
10 @ 240	QOM.VH (125)	HOM (100) †, HOMT, HOMP ‡																																																										
22 @ 240	QO-1H (125)																																																											
25 @ 240	QO (125)																																																											
42 @ 240	QOH																																																											
65 @ 240	QO (125)																																																											
100 @ 240	QJ (125)																																																											

Homeline Wiring Diagram Sample

<p>Alternate wiring diagram for main circuit breaker or main lug</p>	<ul style="list-style-type: none"> Service Equipment marking. Unused neutral branch terminal for equipment grounding, service equipment application only Installation of back-fed main circuit breaker and required kit 	<p>Load center accessories</p>	<p>Square D circuit breakers that may be used in this load center</p>
--	---	--------------------------------	---


<p>Suitable for use with 75°C Copper or Aluminum main conductors. See branch breakers for branch wire rating.</p> 	<ul style="list-style-type: none"> Suitable for use as Service equipment when Service Disconnect (Main Breaker) is installed. Suitable for use as Service equipment when not more than six main disconnecting means are provided and when not used as a lighting and appliance branch circuit panelboard. See NEC, ANSI / NFPA 70. When used as Service equipment, all unused neutral terminals may be used for terminating equipment ground wires. When used as Service equipment install service entrance barrier Kit PKSB1LA for QOM1 Breakers. For back-fed main applications install HOM4RK2LA. Service entrance barrier does not allow the load center to be serviced energized. <ol style="list-style-type: none"> Box bonding when required. / Conexión a la caja cuando sea necesario. Main breaker type: / Interruptor automático principal tipo: QOM1 or QOM1A. Service ground when required. / Tierra de acometida cuando fuese necesario. For back-fed main applications install: / Para aplicaciones de dispositivos principales de alimentación inversa instale el kit: HOM4RK2LA. Main lugs kit no. / No. de accesorio de las zapatas principales: QOL125. Extended neutrals shown are for plug on neutral ready interiors. / Los neutrals extendidos que se muestran son para interiores preparados con neutro enchufable. 	<p>Load Center Accessories - Kits</p> <p>Back-fed Main Cir. Brkr. Retaining PKSB1LA HOM4RK2LA HOM4RKBK1 QOSAMR HOM4L125 PKG7AB LKGUAN</p> <p>Back-fed Main Cir. Brkr. Retaining Service Entrance Barrier Plug-On Surge Arrestor * 1 Phase Surge Arrestor Generator Interlock Kit SUSAT175 Mounting Bracket 1 Phase Plug-on Subfeed Lugs * Equipment Ground Bar Equipment Ground Bar Insulator Neutral Terminal Kit 14-2 AWG Al/Cu wire Neutral Terminal Kit 6-2/0 AWG Al/Cu wire Main Lugs Door Lock Kit 4/0 Lug Kit</p> <p>LK100AN QOL125 PKG7C QOL125VD</p>	 <p>Two single poles, one plug on space or may use one single pole. One two pole requires two spaces.</p> <p>* May plug on two adjacent spaces.</p> <p>Torque Note: When interior mounting screws are loosened or removed, retighten to 35 lb-in.</p> <p>Torque Note: When main breaker or main lug connector mounting nuts are loosened or removed, retighten to 75 lb-in.</p> <p>Equipment Grounding Terminals</p> <p>Assembled in US with US & Foreign Parts</p> <p>QG65716</p>
---	--	--	--

Homeline Wiring Diagrams

Homeline Load Centers — Main Lugs


NOTE: See each catalog number's associated technical drawing online for additional wiring diagram details.

Figure 7 - Homeline Load Centers – Main Lugs

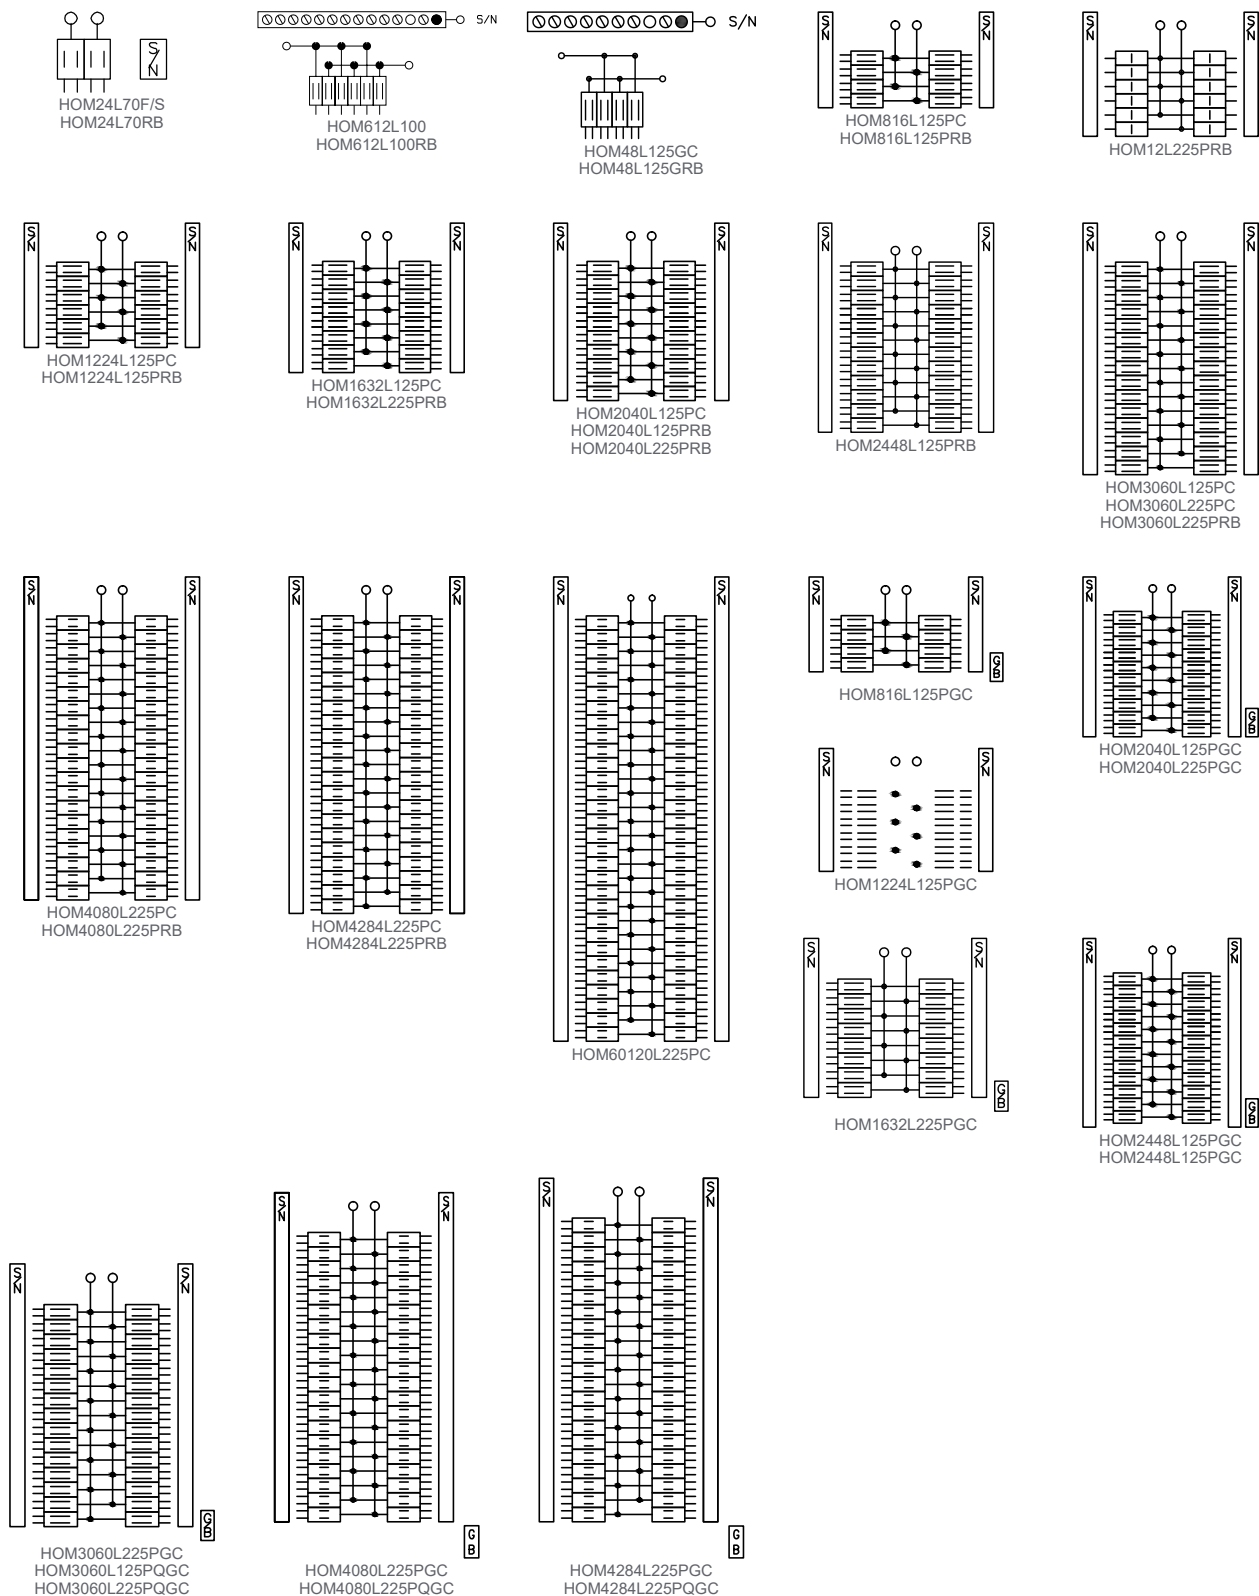

Homeline Load Centers — Main Breaker

Figure 8 - Homeline Load Centers – Main Breaker

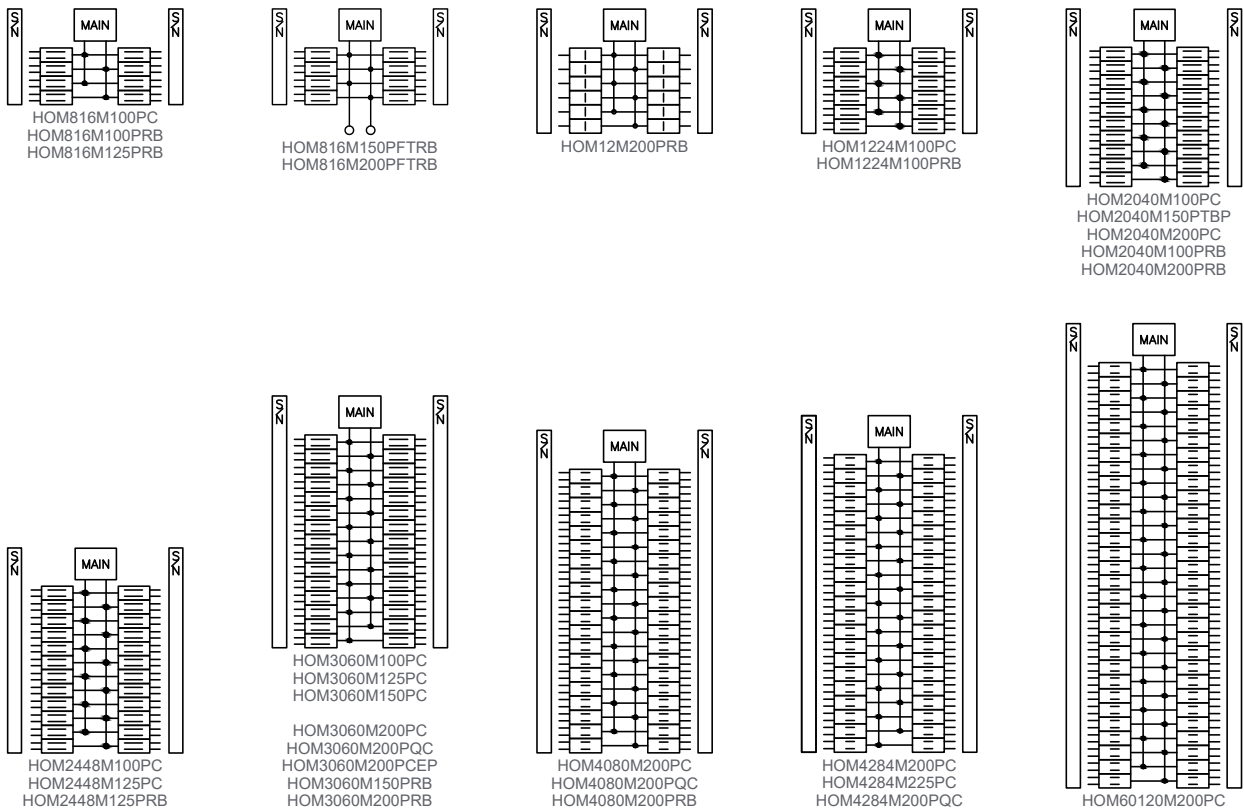

Homeline Value Packs and Covers

Value Pack Offer

Different value pack combinations offer an affordable mix of products for load center customers. Value packs are ideal for new construction, upgrades and remodels. Designed to meet various needs, special packs are combined for Homeline products.

We've got you covered, the covers are included.

Indoor Homeline covers are available in gray or white colors; these can be purchased separately and limit loss or damage if stored at the job site.

Mono-Flat covers, a high-end alternative with aesthetically pleasing design and low profile surface with concealed mounting screws and door hinges, are an alternative to our standard covers.



Plug-on Neutral Load Center Value Packs



HOM3060L225PGCVP



HOM2040M100PCVP

Table 46 - Plug-on Neutral Indoor Load Center Value Packs (compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits ¹¹⁷	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. ¹¹⁸
				Cat. No.	Included Load Center/ Circuit Breakers	Cat. No.	Al	Cu	
Homeline Convertible Mains—Factory-Installed Main Lugs (accepts only HOM Plug-On Circuit Breakers) 10 kA Short Circuit Current Rating Convertible to appropriate QOM 22 kA Short Circuit Current Rating Main Circuit Breaker									
125 A	12	24	12	HOM1224L125PGCVP	(1) HOM1224L125PGC (2) HOM120	PKGTALP1 Included	6-2/0	6-1	6
225 A	30	60	30	HOM3060L225PGCVP	(1) HOM3060L225PGC (3) HOM120 (2) HOM230	PKGTALP2 Included	4-300	4-250	10
100 A	20	40	20	HOM2040M100PCVP	(1) HOM2040M100PC (2) HOM120 (1) HOM230	PK9-27GTA(L) (Order Separately)	6-1	6-3	7
				HOM2040M100PC1AVP	(1) HOM2040M100PC (2) HOM120 (1) HOM230 (1) HOM115PCAFI				
	24	48	24	HOM2448M100PCVP	(1) HOM2448M100PC (3) HOM120 (2) HOM230				

117. Maximum single pole branch circuits utilizing QO and/or QOT (20 A MAX. NON-CTL) circuit breakers.

118. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

Table 46 - Plug-on Neutral Indoor Load Center Value Packs (compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers) (Continued)

Mains Rating	Spaces	Max. 1P Circuits ¹¹⁹	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. ¹²⁰
				Cat. No.	Included Load Center/ Circuit Breakers		Cat. No.	Al	
150 A	30	30	30	HOM3060M150PCVP	(1) HOM3060M150PC (3) HOM120 (2) HOM230	PK9-27GTA(L) (Order Separately)	4-250		10
	20	40	20	HOM2040M200PCVP	(1) HOM2040M200PC (3) HOM120 (2) HOM230				9
	30	60	30	HOM3060M200PCVP	(1) HOM3060M200PC (3) HOM120 (2) HOM230				10
				HOM3060M200PC1AVP	(1) HOM3060M200PC (3) HOM120 (2) HOM230 (1) HOM115PCAFI				
200 A	30	60	30	HOM3060M200PCAFVP	(1) HOM3060M200PC (3) HOM120 (2) HOM230 (3) HOM115PCAFI	PK9-27GTA(L) (Order Separately)	4-250		12
	40	80	40	HOM4080M200PCVP	(1) HOM4080M200PC (3) HOM120 (2) HOM230				
				HOM4080M200PC1AVP	(1) HOM4080M200PC (3) HOM120 (2) HOM230 (1) HOM115PCAFI				
				HOM4080M200PCAFVP	(1) HOM4080M200PC (3) HOM120 (2) HOM230 (3) HOM115PCAFI				

Table 47 - Plug-on Neutral with Qwik-Grip Indoor Load Center Value Packs — (compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. ¹²⁰
				Cat. No.	Included Load Center/ Circuit Breakers		Cat. No.	Al	
Homeline Convertible Mains—Factory-Installed Main Circuit breaker, 22 kA Short Circuit Current Rating—Copper Bus, QOM1 Main Frame Size, Convertible to Main Lugs or Main Breaker									
100 A	20	40	20	HOM2040M100PQCV	(1) HOM2040M100PQC (2) HOM120 (1) HOM230 and (1) PKQGA Qwik-Grip assembly kit	PK9-27GTA(L)	6-1	6-3	7Q
200 A	30	60	30	HOM3060M200PQCV	(1) HOM3060M200PQC (3) HOM120 (2) HOM230 and (1) PKQGA Qwik-Grip assembly kit		4-250		10Q

119. Maximum single pole branch circuits utilizing QO and/or QOT (20 A MAX. NON-CTL) circuit breakers.
 120. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

Table 47 - Plug-on Neutral with Qwik-Grip Indoor Load Center Value Packs — (compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers) (Continued)

Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. 121
				Cat. No.	Included Load Center/Circuit Breakers		Cat. No.	Al	
200 A	40	80	40	HOM4080M200PQCV	(1) HOM4080M200PQC (2) HOM120 (1) HOM230 and (1) PKQGA Qwik-Grip assembly kit		4-250		12Q

Table 48 - Plug-on Neutral Rainproof Load Center Value Packs (compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bar Kit (Order Separately)	Main Wire Size AWG/kcmil		Box No. 121
				Cat. No.	Included Load Center/Circuit Breakers		Cat. No.	Al	
Homeline (Accepts Only HOM Plug-On Circuit Breakers) Convertible Mains—Factory-Installed Main Circuit Breaker, 22 kA Short Circuit Current Rating Convertible to Main Lugs or Lower Amperage QOM2 Main Circuit Breaker									
125 A	12	24	12	HOM1224M125PRBVP	(1) HOM1224M125PRB (3) HOM120 (2) HOM230	PK9-27GTA(L)	6-2/0	6-1	3R
200 A	30	60	30	HOM3060M200PRBVP	(1) HOM3060M200PRB (3) HOM120 (2) HOM230		4-250		7R

Table 49 - Plug-on Neutral Load Center Value Packs with Surge Protective Device (compatible with Plug-on Circuit Breakers and Plug-on Neutral Circuit Breakers)

Mains Rating	Spaces	Max. 1P Circuits	Max. Tandem Circuit Breakers	Load Center Box, Interior, Cover and Branch Circuit Breakers		Equipment Ground Bars	Main Wire Size AWG/kcmil		Box No.
				Cat. No.	Included Load Center/Circuit Breakers/SPD		Cat. No.	Al	
225 A	30	60	30	HOM3060L225PGCSVP2	(1) HOM3060I225PGC (1) HOM230 (2) HOM120, (1) Plug-on Neutral HOM250PSPD, Cover and Ground Bar	PKGTALP2 Included	4-300	4-250	10
200 A	8	16	8	HOM816M200PFTRBSP2	(1) HOM816M200PFTRB (1) Plug-on Neutral HOM250PSPD	PK15GTA (Order Separately)	4-250		6R

121. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.


Homeline Load Center Covers



HOMC12UCW



HOMC24UC

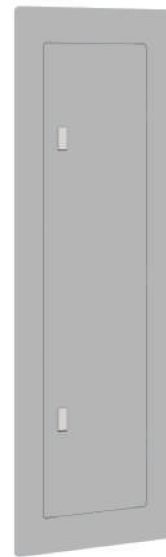

HOMCMF60UC

Table 50 - Homeline Load Center Covers



Mains Rating	Spaces	Homeline Standard Covers		Homeline Mono Flat Covers
		Combination	Combination	Gray
		Gray	White	
100 A	8	HOMC8UC	—	—
	12	HOMC12UC	HOMC12UCW	—
	24	HOMC24UC	HOMC24UCW	—
125 A	8	HOMC12UC	HOMC12UCW	—
	12	HOMC12UC	HOMC12UCW	—
	16	HOMC24UC	HOMC24UCW	—
	20	HOMC24UC	HOMC24UCW	—
	24	HOMC24UC	HOMC24UCW	—
150 A	16	HOMC20UC	HOMC20UCW	—
	20	HOMC20UC	HOMC20UCW	—
	30	HOMC30UC	HOMC30UCW	—
200 A	12	HOMC20UC	HOMC20UCW	—
	16	HOMC20UC	HOMC20UCW	—
	20	HOMC20UC	HOMC20UCW	—
	30	HOMC30UC ¹²¹	HOMC30UCW	—
	40	HOMC42UC	—	—
	42	HOMC42UC	—	—
	60	HOMC60UC	—	HOMCMF60UC
225 A	16	HOMC20UC	HOMC20UCW	—
	20	HOMC20UC	HOMC20UCW	—
	30	HOMC30UC	HOMC30UCW	—
	40	HOMC42UC	—	—
	42	HOMC42UC	—	—
	60	HOMC60UC	—	HOMCMF60UC

121. Extra long version available HOMC30UFL.

QO/Homeline Load Centers

QO vs. Homeline Load Centers

Table 51 - QO vs. Homeline Load Centers

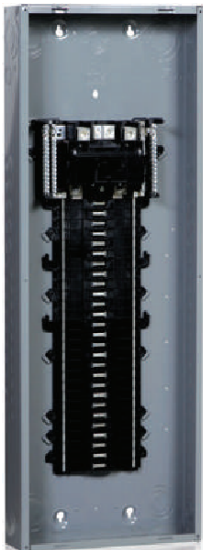QO Load Centers		Homeline Load Centers	
	QO 3/4 in. breakers feature Visi-Trip trip to center position	UL Listed Only for Square D Circuit Breakers	Homeline 1 in. circuit breakers trip to center position
	PON circuit breakers installed on any space in select Load Centers	Accepts Plug-on Neutral CAFIs	PON circuit breakers installed on any space
	Top and split neutral plus (2 or 3) #1 AWG terminals	Backed-out Neutral Terminal Screws	Fully distributed split neutral
	Tin-plated copper	Bus Bars	Tin and copper plated aluminum
	Shielded	Bus Bars	Not shielded
	3/4 in. per 1 Pole space 40 spaces/circuit = 33 3/4 in. Tall Enclosure	Circuit Breaker Format	1 in. per 1 Pole space 40 space/circuit = 39 1/2 in. Tall Enclosure
	Option for Surface or Flush covers that ship separately, or a combo cover (in carton) shipped with Load Center	Cover Options	Combo cover (in carton) shipped with Load Center
Lifetime Limited	Warranty	Combo cover (in carton) shipped with Load Center	
			

QO/Homeline Enclosure Dimensions and Knockout Information




















Indoor Load Centers

Table 52 - Enclosure Dimensions for Indoor Load Centers

Box No.	W		H		D		Box No.	W		H		D	
	in.	mm	in.	mm	in.	mm		in.	mm	in.	mm	in.	mm
1	3.81	97	6.72	171	3.00	76	14	14.25	362	20.92	531	3.75	95
2	4.81	122	9.30	236	3.19	81	15	20.00	508	50.00	1270	5.75	146
3	4.81	122	9.30	236	3.19	81	16	20.00	508	62.00	1730	5.75	146
4	8.88	226	12.57	319	3.80	97	17	20.00	508	53.00	1350	5.75	146
5	14.25	362	14.92	379	3.75	95	18	5.88	149	16.12	409	3.38	86
6	14.25	362	17.92	455	3.75	95	19	7.56	192	23.12	587	4.25	108
7	14.25	362	20.92	531	3.75	95	20	9.62	244	26.12	663	4.75	121
8	14.25	362	26.04	661	3.75	95	21	8.88	226	14.80	376	3.80	97
9	14.25	362	29.86	758	3.75	95	22	8.55	217	23.92	608	3.95	100
10	14.25	362	33.78	858	3.75	95	23	14.25	362	29.86	758	3.75	95
11	14.25	362	37.98	965	3.75	95	24	14.25	362	43.15	1100	3.75	95
12	14.25	362	39.37	1000	3.75	95	25	14.25	362	48.5	1240	3.75	95
13	5.88	149	13.12	333	3.38	86	26	14.25	362	33.78	858	3.75	95

Table 53 - Knockouts for Indoor Load Centers


Symbol	A	B	C	D	E	F	G	H	I
Conduit Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2

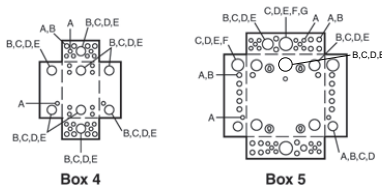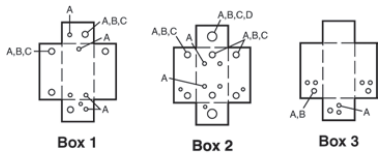

Indoor Load Centers with Qwik-Grip

Table 54 - Enclosure Dimensions for Indoor Load Centers with Qwik-Grip

Box No.	W		H		D	
	in.	mm	in.	mm	in.	mm
7Q	14.25	362	20.92	531	3.75	95
8Q			26.04	661		
9Q			29.86	758		
10Q			33.78	858		
11Q			37.98	965		
12Q			39.37	1000		

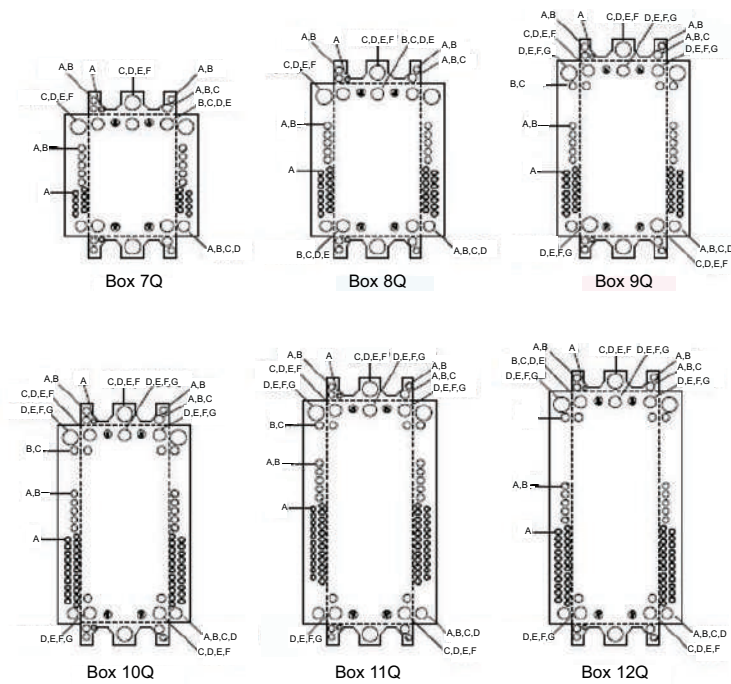

Rainproof Load Centers


Table 55 - Enclosure Dimensions for Rainproof Load Centers

Box No.	W		H		D	
	in.	mm	in.	mm	in.	mm
1NM	6.52	166	8.79	223	3.90	99
1R ¹²²	4.88	124	9.38	238	4.00	102
2R	8.88	226	12.65	321	4.27	108
3R	14.75	375	18.92	481	4.52	115
4R			22.06	560		
5R			26.04	661		
6R			29.86	758		
7R			33.78	858		
8R			37.98	965		
9R	4.56	116	6.50	165	3.88	99
10R	6.92	176	13.18	335	4.12	105
11R	7.56	192	23.24	590	4.75	121
12R	9.62	244	26.24	666	5.50	140
13R	6.92	176	16.18	411	4.12	105
14R	14.75	375	39.37	1000	4.52	115
15R	8.88	226	14.8	376	4.27	108
16R	8.55	217	24.75	629	4.16	106
17R	8.88	226	12.65	321	4.27	108

Table 56 - Knockouts for Rainproof Load Centers

Symbol	A	B	C	D	E	F	G	H
Conduit Size	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3

122. HOME250SPA and QO260NATR top endwall has no hub opening.

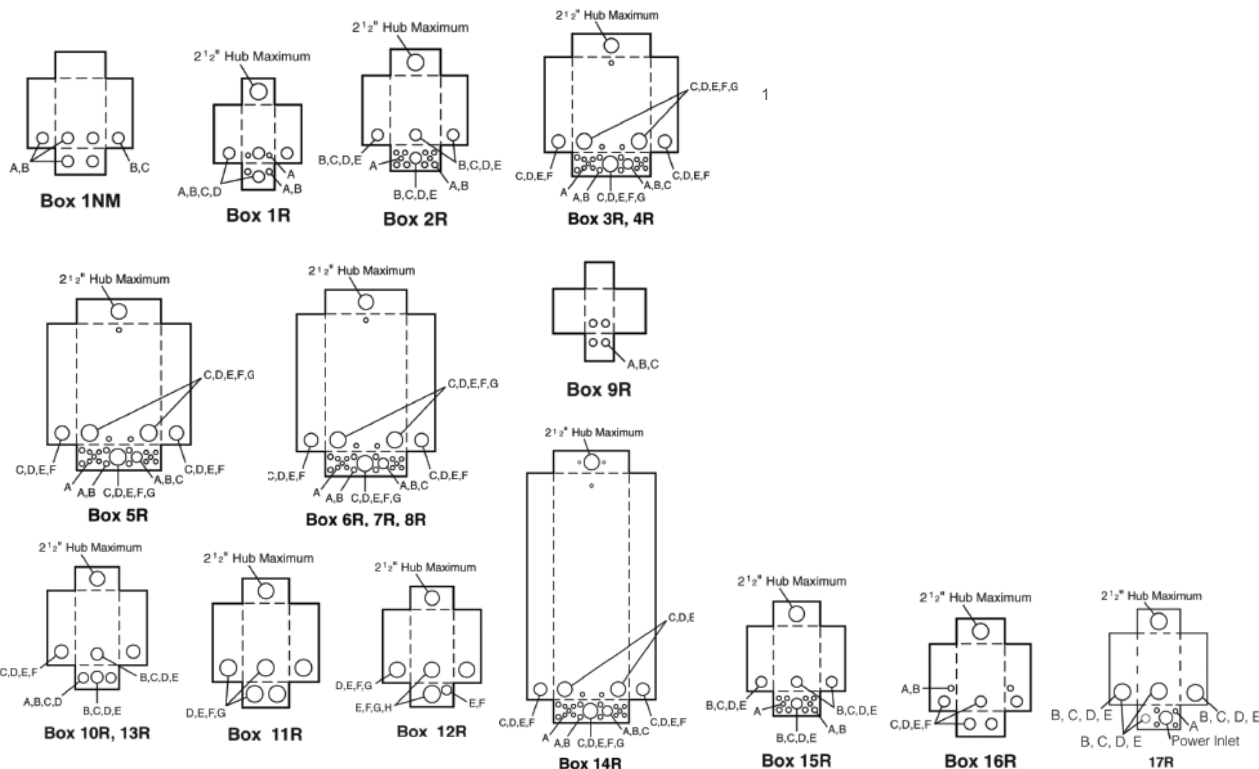

[35] HOME250SPA and QQ260NATR top endwall has no hub opening.

QO/Homeline Bolt-On Hubs

Square D equipment with R or RB suffix, designated NEMA 3R rainproof construction, utilizes bolts-on hubs listed below. The RB devices will accept 3/4 in. through 2 1/2 in. bolt-on hubs without the use of reducers.

Off-center conduit thread openings and elongated mounting holes provide quick and easy adjustment to eliminate costly conduit offsets and bends. Catalog devices with suffix R require 3 in. through 4 in. field cut opening. Hubs are suitable for use with conduit having ANSI standard taper pipe thread.



B075



B150



B250

Table 57 - UL Listed Bolt-On Hubs for RB Devices

Hub Cat. No.	B075	B100	B125	B150	B200	B250
Conduit Size	3/4 in.	1 in.	1-1/4 in.	1-1/2 in.	2 in.	2-1/2 in.

NOTE: Closing cap (catalog number B-CAP) is provided factory-installed on each device with the RB suffix.

Table 58 - UL Listed Enclosure Coupling for RB Devices

(Designed for mounting in field cut opening. Includes gasket and four mounting bolts and nuts.)		
Hub Cat. No.	B300	B400
Conduit Size	3 in.	4 in.

QO/Homeline Accessories



PSDS

Table 59 - Circuit Identification Stickers

Load Center	Cat. No.	Usage Information
QO and Homeline	PSDS	Circuit identification stickers for use on cover directory labels to identify branch circuits



QO1SE

Table 60 - Cover Sealing Strap

Load Center	Cat. No.	Usage Information
QO	QO1SE	Provides means of sealing trim mounting screws on QO load center covers



PK8FL

Table 61 - Door Lock Kits

(Available for indoor load centers. Two keys provided with each lock kit.)

Load Center	Cat. No.	Usage Information
QO	PK8FL ¹²³	Use with QO612L100DF/S, QO612L100DFCU/SCU, QO612L100DTF/S, QO816L100DF/S, QO816L100DFCU/SCU, QO816L100DTF/S, QO48M30DSGP, or QO48M60DSGP
QO and Homeline	PK6FL	Use with convertible mains, 1Ø and 3Ø 100–225 A, and fixed mains, 3Ø 125–225 A indoor load centers
QO	PK4FL	Use with 300 and 400 A indoor load centers



PK6FL



PK4FL

Table 62 - Filler Plates

(Fast to install, snap-in type)

Load Center	Cat. No.	Usage Information
QO	QOFP	Use on QO load center cover to fill unused branch circuit breaker opening
QO and Homeline	QOM1FP	Fills main circuit breaker opening in convertible load center covers 100–125 A
	QOM2FP	Fills main circuit breaker opening in convertible load center covers 150–225 A
QO	QO2FP	Fills main circuit breaker opening in Q style 3Ø load center covers (S03 Series)
Homeline	HOMFP	Use on Homeline load center cover to fill unused branch circuit breaker opening



QOFP



QO2P



HOMFP

123. QO403L60NF/S does not have provisions for a field-installed lock.

Table 63 - Handle Padlock Attachments



QOM1PA



QOM2PA

Load Center	Cat. No.	Usage Information
QO and Homeline	QOM1PA	For padlocking main circuit breakers in convertible load center OFF
	QOM2PA	For padlocking main circuit breakers in convertible load center OFF

Table 64 - Neutral Bonding Screw



4028344850K



4028345850K

Load Center	Cat. No.	Usage Information
QO and Homeline	4028344850K	For use on all Homeline and QO 125 convertible main load centers
	4028345850K	For use on QO 150–225 convertible main load centers
	PKNBSCP	For use on QO and Homeline convertible main load centers

Table 65 - Neutral / Ground Lugs



LK70AN



LK225ANHOM

Load Center	Cat. No.	Usage Information
QO and Homeline	LK70AN	Field-installed for 12–2 Al or 14–4 Cu AWG wire
	LK100AN	Field-installed for 6–2/0 Al/Cu AWG wire
	LK125AN	Field-installed for 14–2/0 Al/Cu AWG wire
QO	LK150AN	Field-installed for 2–3/0 Al/Cu AWG wire
	LK225AN	Field-installed for 4 AWG to 300 kcmil Al/Cu wire. Use in Series S, 150-225 A QO load center.

Table 66 - Replacement Cover Directory Label



UCD42CP

Load Center	Cat. No.	Usage Information
QO and Homeline	LSDL	1 through 42 numbered universal replacement directory label for load center covers
	UCD42CP	1 through 42 universal circuit directory kit, including circuit identification labels

Table 67 - Retaining Kit for Breakers Used as Backfed Mains



Load Center	Cat. No.	Usage Information
(Back-fed main circuit breaker retaining kits secure 2-pole, 10-125 A circuit breakers to single-phase or three-phase mains interiors when used as back-fed main circuit breakers. Mounting of retaining kits is based on top-feed applications.)		
QO	PK2MB	Fasten circuit breaker to interior when used as a back-fed main. For QO612L100F/S, RB, QO612L100DF/S, QO816L100F/S, RB, QO816L100DF/S and QO148L125GF/S, GRB load centers.
	PK3MB	Fasten 3P circuit breaker without accessories to left side of interior when used as a back-fed main. For 3Ø load centers.
	PK5RK	Fasten circuit breaker to interior when used as a back-fed main for 2P QO 150–200 A circuit breakers.
	PK4MB2LA	Fasten one circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02
	PK4MB2HA	Fasten one circuit breaker with or without electrical accessories to right side of interior when used as a back-fed main. For 1Ø 150–225 ampere convertible main load centers. Series S01 and S02
Homeline	HOM1RK	Fasten circuit breaker to interior when used as a back-fed main. For HOM612L100F/S, RB and HOM48L125GC, GRB load centers.
	HOM4RK2LA	Fasten one circuit breaker right side of interior when used as a back-fed main. For 100–125 A convertible main load centers, Series S01 and S02
	HOM4RK2HA	Fasten one circuit breaker right side of interior when used as a back-fed main. For 150–225 A convertible main load centers, Series S01 and S02
	HOM5RK	Fasten circuit breaker to interior when used as a back-fed main. For 2P 150–200 A circuit breakers.

Table 68 - Service Entrance Barriers

Load Center	Cat. No.	Usage Information
QO and Homeline	PKSB1LA	QO / Homeline 1Ø 100–125 A QOM1 convertible main load centers
	PKSB1HA	QO / Homeline 1Ø 150–225 A QOM2 convertible main load centers
QO	PKSB3	QO 3Ø convertible main load centers
	PKSB1QOBF	QO 1Ø back-fed main breaker applications
	PKSB3BF	QO 3Ø back-fed main breaker applications
Homeline	PKSB1HOMBF	Homeline back-fed main breaker applications

Table 69 - Generator Circuit Breaker Interlock Kit



QOCRBGK1C



QOCGK2C



QORBGK2C



HOMCGK2C



HOMRBGK2C

Load Center	Cat. No.	Usage Information
QO	QOCRBGK1C	For use on G and S Series NEMA 1 and G, S1 and S2 Series NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.
	QOCGK2C	For use on G and S Series NEMA 1 and G and S1 Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.
	QORBGK2C	For use on S2 Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a QO 2P (15–125 A) branch circuit breaker. Includes a retaining kit.
Homeline	HOMCRBGK1C	For use on S Series NEMA 1 and NEMA 3R load centers. Interlocks a QOM1 2P main circuit breaker of a load center (100–125 A) with a Homeline 2P (15–125 A) branch circuit breaker.
	HOMCGK2C	For use on S Series NEMA 1 and S1 Series NEMA 3R load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a Homeline 2P (15–125 A) branch circuit breaker.
	HOMRBGK2C	For use on S2 and S3 Series NEMA 3R QOM2 load centers. Interlocks a QOM2 2P main circuit breaker of a load center (150–225 A) with a Homeline 2P (15–125 A) branch circuit breaker.

Table 70 - Qwik-Grip Load Center Accessories



PKQGF



PKQGI

Load Center	Cat. No.	Usage Information	Qty.
QO and Homeline	PKQGS	Qwik-Grip replacement shield — Qwik-Grip shield	1
	PKQGF	Qwik-Grip fillers — Qwik-Grip fillers	10
	PKQGI	Qwik-Grip replacement insert — Qwik-Grip insert	1
	PKQGA	Qwik-Grip assembly kit — Qwik-Grip shields, Qwik-Grip fillers	4 each

Table 71 - Manual Transfer Equipment Kit



QO2DTI



QODTIM



PK4DTIM4LA



PK4DTIM4LAL



PK7GTA



PK12GTA



PK15GTA6



PKG7GTA6



PKG7GTA6



PKG7GTA6



PKG7GTA6

(Manual transfer equipment kits secure two 2-pole, 10-125 A circuit breakers.)		
Load Center	Load Center	Usage Information
QO	QO2DTI	For interlocking the handles of two 2P or one 2P and one 1P QO and Q1 circuit breakers mounted side-by-side so that only one circuit breaker can be ON at a time.
	QODTIM	QO2DTI mechanical interlock attachment with retaining kits for securing two adjacent back-fed circuit breakers in dual power supply applications. Can be used with (2) 2P or (1) 2P and (1) 1P QO circuit breakers in QO816L100 load centers.
	PK4DTIM4LA	Secures two 2P circuit breakers to right side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02.
	PK4DTIM4LAL	Secures two 2P circuit breakers to left side of interior when used as back-fed mains, a QO2DTI Kit included for back-up power supply applications. For 1Ø 100–125 ampere convertible main load centers. Series S01 and S02.

Table 72 - Ground Bar Kits

(Field-installable in all load centers. Same wire size as neutral terminals. Suitable for copper or aluminum wire)		
Load Center	Load Center	Usage Information
QO and Homeline	PK3GTA1	Ground Bar Assembly—3 connectors
	PK4GTA	Ground Bar Assembly—4 connectors
	PK5GTA	Ground Bar Assembly—5 connectors
	PK7GTA	Ground Bar Assembly—7 connectors
	PK9GTA	Ground Bar Assembly—9 connectors
QO	PK12GTA	Ground Bar Assembly—12 connectors
QO and Homeline	PK15GTA	Ground Bar Assembly—15 connectors
	PK18GTA	Ground Bar Assembly—18 connectors
	PK23GTA	Ground Bar Assembly—23 connectors
	PK27GTA	Ground Bar Assembly—27 connectors
QO	PK15GTA6	Ground Bar Assembly—21 connectors. Use in high amperage load centers
	PK15GTAL	Standard PK15GTA with a 1–4/0 Al/Cu Lug
QO and Homeline	PK18GTAL	Standard PK18GTA with a 1–4/0 Al/Cu Lug
QO	PK23GTAL	Standard PK23GTA with a 1–4/0 Al/Cu Lug
QO and Homeline	PKG7GTA6	Ground Bar Pack— PK9GTA, PK9GTA, and LK100AN
	PKG7GTA6	Ground Bar Pack— PK9GTA, PK18GTA, and LK100AN
	PKG7GTA6	Ground Bar Pack—PK15GTA, PK18GTA, and LK100AN
	PKG7GTA6	Insulator Kit for PK7GTA through PK27GTA



Table 73 - Ground Bar Kits

(All PK equipment grounding kits are supplied with mounting screws, necessary installation instructions, and an equipment grounding terminal self-adhesive label.)												
Catalog No.	Total Qty.	Terminals						Approximate Overall Length		Distance Between Mounting Holes		Mounting
		Quantity Each Size (See Wiring Range , page 77)										
		I	II	III	IV	V	VI	in.	mm	in.	mm	
PK3GTA1	3	3	—	—	—	—	—	1.38	35	One hole	One hole	Top
PK4GTA	4	4	—	—	—	—	—	1.63	41	One hole	One hole	Top
PK5GTA	5	5	—	—	—	—	—	2.25	57	1.25	32	Top
PK7GTA	7	7	—	—	—	—	—	2.88	73	1.25	32	Top or Side
PK9GTA	9	9	—	—	—	—	—	3.78	96	3.13	80	Top
PK12GTA	12	12	—	—	—	—	—	4.7	119	3.13	80	Top
PK15GTA	15	15	—	—	—	—	—	5.63	143	3.13	80	Top
PK15GTAL	16	15	1	—	—	—	—	8.13	207	3.13	80	Top
PK15GTA6	21	15	—	—	6	—	—	5.88	149	124	124	Top
PK18GTA	18	18	—	—	—	—	—	8.13	167	3.13	80	Top
PK18GTAL	19	18	1	—	—	—	—	5.88	224	3.13	80	Top
PK23GTA	23	23	—	—	—	—	—	6.56	206	3.13	80	Top
PK23GTAL	24	23	1	—	—	—	—	8.81	240	3.13	80	Top
PK27GTA ¹²⁵	27 or 26	27 or 26	—	1	—	—	—	8.11	238	3.13	80	Top

Table 74 - Wiring Range

Size	Cu (AWG)	Al (AWG)
I	(1) #14 – # 4 or (2) #14 or #12	(1) #12 – #4 or (2) #12 or #10
II	(1) #1 – 4/ 0	(1) #1 – 4/0
III	(1) #6 – 2/ 0	(1) #6 – 2/0
IV	(1) #6 – 3/0	(1) #6 – 3/0
V	(1) #14 – 1/0	(1) #14 – 1/0
VI	(1) #10 – 2/0	(1) #6 – 2/0

124. 3.13 in. (80 mm) on small terminals; 5.25 in. (133 mm) on large terminals.

125. PK27GTA includes one main grounding lug that mounts with two terminal screws and requires three terminals for mounting.

QO/Homeline Surge Protective Devices (SPD)

Square D Whole Home Surge Protection blocks the voltage spikes at the load center, providing downstream protection for all your connected devices. Square D Surge Protective Devices have been developed based on decades of expertise and industry-leading technology, making it a trusted brand among homeowners and electrical contractors alike.

To decide which device is best for your home, consider the following sections when working with your electrical contractor.

Load Center and CSED Surge Protective Devices

Cat. No.	Description	Surge Current per Phase	Schedule
1 phase – 3 wire			
QO2175SB	QO Surgebreaker	22.5 kA	DE1B
HOM2175SB	HOM Surgebreaker		
SDSA1175	1Ø3W–120/240 V Compact SPD	36 kA	
QO250PSPD	QO Plug-on Neutral SPD	50 kA	
HOM250PSPD	HOM Plug-on Neutral SPD	50 kA	
HEPD25	SurgeArrest Whole Home Electronic Protection	25 kA	
HEPD50		50 kA	
HEPD80		80 kA	
SDSB80111	Surgebreaker Plus (all-in-one protection for appliances, ethernet, and telephone)	80 kA	
3 phase – 3 wire			
SDSA2040D	3Ø3W–240 V Compact SPD	40 kA	DE1B
3 phase – 4 wire			
SDSA2040	3Ø4W–208Y/120 V Compact SPD	40 kA	DE1B

Load Center and CSED Surge Protective Devices Mounting Kits



QOSAMK



HEPD58MKF

Cat. No.	Description	Surge Current per Phase	Schedule
QOSAMK	SDSA1175 Mount Kit	—	DE1B
HEPD25MKF	HEPD25 Flush Mount Kit	—	
HEPD58MKF	HEPD50 and HEPD80 Flush Mount Kit	—	

Whole Home Surge Protection



QO250PSPD



HOM250PSPD



SDSA1175

Plug-on Neutral SPD for QO (QO250PSPD) and Homeline (HOM250PSPD)

Use — QO250PSPD for QO load centers, combination devices (CSEDs) and NQ panelboards. HOM250PSPD for Homeline load centers and combination devices (CSEDs)

Feature — Plug-on Neutral connectivity. Easy to install, no wiring needed.

Installation Flexibility — NEMA 1 (Indoor)

Surge Current Capacity — 50 kA

Standards — UL Listed 1449, 4th Edition and CSA Certified

Warranty — 5 Year/\$50,000 Connected Equipment Limited Warranty

Hard-Wire Whole House Surge Protective Device (SDSA1175)

- **Use** — Suitable for Use in Service Entrance locations: Meets Requirements of NEC Article 280
- **Feature** — Coordinated Fuse Technology
- **Installation Flexibility** — NEMA 4X (Indoor and Outdoor)
- **Surge Current Capacity** — 36 kA
- **Standards** — UL Listed 1449, 4th Edition and CSA Certified
- **Warranty** — 2 Years



QO2175SB

Surgebreaker for QO (QO2175SB) and Homeline (HOM2175SB)

- **Use** — QO2175SB for QO load centers, combination devices and NQ panelboards. HOM2175SB for Homeline load centers and combination devices
- **Installation Flexibility** — NEMA 1 (Indoor)
- **Surge Current Capacity** — 22.5 kA per phase
- **Standards** — UL Listed 1449, 4th Edition and CSA Certified
- **Warranty** — 3 Year/\$10,000 Connected Equipment Limited



HOM2175SB

Home Electronics Protective Device (HEPD25, HEPD50, HEPD80)

- **Use** — Small, affordable whole house surge suppression that can easily be mounted to Square D and competitors load centers
- **Installation Flexibility** — NEMA 4X (Indoor and Outdoor). Easy-to-install, optional flush mount kit for a professional look when installed in a finished wall (HEPD25MKF, HEPD58MKF).
- **Surge Current Capacity** — 25 kA (HEPD25), 50 kA (HEPD50) and 80 kA (HEPD80)
- **Standards** — UL Listed 1449, 4th Edition and CSA Certified
- **Warranty** — 3 Year/\$30,000 (HEPD25) or 3 Year/\$50,000 (HEPD50) or 5 Year/\$75,000 (HEPD80) Connected Equipment Limited Warranty



HEPD25

Surgebreaker Plus Whole House Surge Protector (SDSB80111)

- **Use** — Mounts directly to any load center from any manufacturer
- **Feature** — Removable modules (cable, Ethernet, and telephone) allow quick and easy installation customization
- **Installation Flexibility** — NEMA 1

(Indoor)

- **Surge Current Capacity** — 80 kA
- **Standards** — UL Listed 1449, 4th edition
- **Warranty** — 5 Year/\$100,000 Connected Equipment Limited Warranty



SDSB80111

Enclosed Devices

Designed to be tough, reliable, and help provide exceptional performance in the most grueling conditions.

Provides a dead front housing for circuit breakers, molded case switches, and motor circuit protectors to help prevent personnel from accidentally contacting energized parts. Protect circuit breaker from physical damage. Allow circuit breaker operation without removing cover.

Features

Residential Circuit Breaker Enclosures:

- QOM2 circuit breaker enclosures
- UL Listed
- 100-225 A Max. QOM2 circuit breakers
- 22 k RMS short circuit current ratings
- Ideal for 100–225 A residential applications with Square D load centers, CSED meter mains, and circuit breaker enclosures
- Provides the flexibility to meet more applications with a single breaker format, which also simplifies inventory stocking
- A compact and flexible 2020 NEC compliant residential service entrance device
- NEMA Type 1 and Type 3R enclosures

Product Description

These devices include provisions for a double-pole circuit breaker to be installed in an enclosure. Typical applications include a main service entrance disconnect for mobile homes and residences, as well as equipment or outbuilding disconnects.



QO2100BNS



QO2100BNRB

Type

Enclosed molded case circuit breakers are UL Listed; File E136861, for enclosures and File E10027 for circuit breakers. Enclosed molded case switches are UL Listed under File E59921.

Knockouts

Located in back, side, top and bottom of all devices

Service

- 120/240 Vac, 1Ø3W
- 240 Vac, 1Ø2W
- 240 Vac, 1Ø3W
- 240/120 Vac, 3Ø4W
- 208Y/120 Vac, 3Ø4W

Bolt-On Hubs

- Hubs available from 0.75 in. (19 mm) to 2.50 in. (64 mm) conduit size
- Off-center thread openings keep conduit close to wall
- No gasket required with hubs

Neutral Assemblies

- Insulated and groundable (except QO2TR)
- Suitable for aluminum or copper wire
- Grounding terminal provided

Equipment Grounding Bar

- Field-installable PKOGTA2
- Suitable for #6 AWG 2/0 aluminum or #10 AWG 2/0 AWG copper wire

Ratings — (Single Phase)

- QO (2-pole): 10,000 A
- QOM2: 22,000 A
- QB: 10,000 A
- QD: 25,000 A
- QG: 65,000 A
- QJ: 65,000 A @ 240 V or 100,000 A @ 208Y / 120

Circuit Breakers

Visi-Trip indication (QO circuit breakers). Lugs suitable for aluminum or copper wire. Refer to catalog sections listed below:

- QO Class 730
- QB, QD, QG and QJ Class 734
- QOM2 Class 736
- Molded-case switches Class 601

Enclosures

Indoor Enclosures




Indoor Enclosures — NEMA Type 1

Material, Finish and Knockouts — Enclosures are from sheet steel with knockouts at top, bottom, back and sides. Indoor finish consists of gray baked enamel electrodeposited over cleaned, phosphatized steel.

Flush and Surface Covers — Indoor covers are available in surface or flush mount and are included with our enclosed device.

Provisions — Indoor devices have padlock provisions for locking circuit breaker handle in ON (I) or OFF (O) position.

Rainproof Enclosures



Rainproof Enclosures — NEMA Type 3R

Material, Finish and Knockouts — Enclosures are from galvanized sheet steel with knockouts at bottom, back and sides. Rainproof finish consists of gray baked enamel, electrodeposited over cleaned, phosphatized, galvanized steel.

Provisions — Rainproof devices have provisions to padlock cover closed and for interchangeable bolt-on hubs.

Service Entrance Devices

Table 75 - Residential Enclosed Circuit Breaker with PowerPacT Q-Frame Molded Case Circuit Breakers



QO2150MRBE

Enclosure	Mains Rating	Short Circuit Rating	General Purpose	Included In Package
Rainproof NEMA 3R	150 A	25 kA	QO2150MRBE	Factory Installed: (1) QDL22150 (1) Service entrance barrier (1) Emergency disconnect label & (1) Service disconnect label
Rainproof NEMA 3R	200 A	25 kA	QO2200MRBE	Factory Installed: (1) QDL22200 (1) Service entrance barrier (1) Emergency disconnect label & (1) Service disconnect label
Rainproof NEMA 3R	70–200 A	10–100 kA	QO2200RBE ¹²⁶	Factory Installed: (1) Emergency disconnect label & (1) Service disconnect label Factory Included: (1) Service entrance barrier ¹²⁷

Table 76 - Replacement Kit for Residential Enclosed Circuit Breaker with PowerPacT Q-Frame Molded Case Circuit Breakers

Mains Rating	Short Circuit Rating	Commercial Reference	Included In Package
70–200 A	10–100 kA	PKSB1Q2	(1) Service entrance barrier & (1) Emergency disconnect label ¹²⁶

Table 77 - PowerPacT Q-Frame Molded Case Circuit Breakers for Residential



QBL22070

Service	Type 3R — Rainproof Circuit Breaker not included	Ampere Rating	Short Circuit Rating			
			10 k AIR	25 k AIR	65 k AIR	100 k AIR
2P 240 Vac Maximum	QO2200RBE	70 A	QBL22070	QDL22070	QGL22072	QJL22073
		80 A	QBL22080	QDL22080	QGL22080	QJL22080
		90 A	QBL22090	QDL22090	QGL22090	QJL22090
		100 A	QBL22100	QDL22100	QGL22100	QJL22100
		110 A	QBL22110	QDL22110	QGL22110	QJL22110
		125 A	QBL22125	QDL22125	QGL22125	QJL22125
		150 A	QBL22150	QDL22150	QGL22150	QJL22150
		175 A	QBL22175	QDL22175	QGL22175	QJL22175
		200 A	QBL22200	QDL22200	QGL22200	QJL22200

126. Suitable ONLY for breakers from 70-200 A. Not compatible with 225 A breakers.
127. Suitable only for 2P Q-frame molded case circuit breakers only.

Non-Service Entrance Devices

Table 78 - Enclosed Molded Case Switch, Switch Included (Does NOT provide overcurrent protection)



QO200TRNM

Service		Ampere Rating	General Purpose	Rainproof	Box No. ¹²⁸
240 Vac		60 A ^{129, 130}	QO260NATS	QO200TR	2, 9R ¹³¹
				QO200TRNM	1NM
				QO260NATR	1R
120/240		100 A ¹³²	QO2000NS	QO2000NRB	13, 10R

Table 79 - Enclosed GFCI Circuit Breakers, GFCI Circuit Breaker Included — 10 kA Short Circuit Current Rating



HOME250SPA

Service	Ampere Rating	Type 3R— Rainproof Circuit Breaker Included	Circuit Breaker Only	Box No. ¹²⁸
120/240 Vac	50 A	QOE250GFINM	QO250GFI	1NM (Non metallic)
		HOME250SPA	HOM250GFI	1M (Metallic)
	60 A	QOE260GFINM	QO260GFI3W	1NM (Non metallic) 1M (Metallic)

Table 80 - 2-Pole Circuit Breaker Enclosures — 22 kA Short Circuit Current Rating



QO3100BNF

Service ¹³³	Ampere Rating	General Purpose ¹³⁴	Rainproof	Box No. ¹²⁸
120/240 Vac	100 A	QO2100BNF/S	QO2100BNRB	13, 10R
	125 A	QO2125BNF/S	QO2125BNRB	18, 13R
60 A Max. Circuit Breaker Enclosures—10 kA, Short Circuit Current Rating Circuit breaker not included. (Order separately from QO Plug-On Circuit Breakers). Will not accept QO-GFI circuit breaker nor QO circuit breakers with factory-installed accessories.				
240 Vac	60 A	—	QO2TR	9R

128. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

129. Not suitable for service equipment.

130. Maximum 10 hp 240 Vac.

131. Top endwall has no hub opening.

132. Maximum 20 hp 240 Vac.

133. Not for use with one pole QO circuit breakers. Circuit breakers not included. Accepts QO circuit breakers with factory-installed accessories. Order equipment ground bar PKOGTA2, if required.

134. Order F for flush, S for surface.

Table 81 - Q-Frame Enclosures and Q-Frame Circuit Breakers




Service		Enclosure Only			Circuit Breaker (Order Separately)				
		Type 1 General Purpose ¹³⁵	Type 3 Rainproof	Box No.	Ampere Rating	10 k AIR	25 k AIR	65 k AIR	65 k AIR
2P 240 Vac		Q22200NS or Q23225NF/S	Q22200NRB or Q23225NRB	19, 11R, 20, 12R	70 A	QBL22070	QDL22070	QGL22070	QJL22070
					80 A	QBL22080	QDL22080	QGL22080	QJL22080
					90 A	QBL22090	QDL22090	QGL22090	QJL22090
					100 A	QBL22100	QDL22100	QGL22100	QJL22100
					110 A	QBL22110	QDL22110	QGL22110	QJL22110
					125 A	QBL22125	QDL22125	QGL22125	QJL22125
					150 A	QBL22150	QDL22150	QGL22150	QJL22150
					175 A	QBL22175	QDL22175	QGL22175	QJL22175
					200 A	QBL22200	QDL22200	QGL22200	QJL22200
					225 A	QBL22225	QDL22225	QGL22225	QJL22225
3P 240 Vac		Q23225NF/S	Q23225NRB	20, 12R	70 A	QBL32070	QDL32070	QGL32070	QJL32070
					80 A	QBL32080	QDL32080	QGL32080	QJL32080
					90 A	QBL32090	QDL32090	QGL32090	QJL32090
					100 A	QBL32100	QDL32100	QGL32100	QJL32100
					110 A	QBL32110	QDL32110	QGL32110	QJL32110
					125 A	QBL32125	QDL32125	QGL32125	QJL32125
					150 A	QBL32150	QDL32150	QGL32150	QJL32150
					175 A	QBL32175	QDL32175	QGL32175	QJL32175
					200 A	QBL32200	QDL32200	QGL32200	QJL32200
					225 A	QBL32225	QDL32225	QGL32225	QJL32225

Table 82 - QOM2 Enclosures and QOM2 Circuit Breakers

Service		Enclosure Only ¹³⁶			QOM2 Circuit Breaker (Order Separately)	
		Type 1 General Purpose ¹³⁵	Type 3 Rainproof	Box No. ¹³⁷	Ampere Rating	22 k AIR
		Cat. No.	Cat. No.			Cat. No. ¹³⁸
2P 240 Vac Max.		QOM22225NF/S	QOM22225NRB	22, 16R	100 A	QOM2100VH
				22, 16R	125 A	QOM2125VH
				22, 16R	150 A	QOM2150VH
				22, 16R	175 A	QOM2175VH
				22, 16R	200 A	QOM2200VH
				22, 16R	225 A	QOM2225VH

135. Order F for flush, S for surface.

136. Equipment ground bar kit PKOGTA2 factory-included.

137. See QO/Homeline Enclosure Dimensions and Knockout Information, page 67.

138. DE3A Discount Schedule.

Schneider Electric
800 Federal Street
Andover, MA 01810
USA

888-778-2733

www.se.com

As standards, specifications, and design change from time to time,
please ask for confirmation of the information given in this publication.