

Product data sheet

Specifications



IEC contactor, TeSys Deca, nonreversing, 9A, 5HP at 480VAC, up to 100kA SCCR, 3 phase, 3 NO, 415VAC 50/60Hz coil, open style

LC1D09N7

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 112.80 USD

Main

| | |
|--------------------------------|--|
| Range Of Product | TeSys Deca |
| Product Or Component Type | Contactor |
| Device Short Name | LC1D |
| Contactor Application | Motor control Resistive load |
| Utilisation Category | AC-3 AC-1 AC-4 AC-3e |
| Poles Description | 3P |
| [Ue] Rated Operational Voltage | Power circuit <= 690 V AC 25...400 Hz Power circuit <= 300 V DC |
| [Ie] Rated Operational Current | 9 A (at <140 °F (60 °C)) at <= 440 V AC AC-3 for power circuit 25 A (at <140 °F (60 °C)) at <= 440 V AC AC-1 for power circuit 9 A (at <140 °F (60 °C)) at <= 440 V AC AC-3e for power circuit |
| [Uc] Control Circuit Voltage | 415 V AC 50/60 Hz |

Complementary

| | |
|----------------------------|---|
| Motor Power Kw | 2.2 kW at 220...230 V AC 50/60 Hz (AC-3) 4 kW at 380...400 V AC 50/60 Hz (AC-3) 4 kW at 415...440 V AC 50/60 Hz (AC-3) 5.5 kW at 500 V AC 50/60 Hz (AC-3) 5.5 kW at 660...690 V AC 50/60 Hz (AC-3) 2.2 kW at 400 V AC 50/60 Hz (AC-4) 2.2 kW at 220...230 V AC 50/60 Hz (AC-3e) 4 kW at 380...400 V AC 50/60 Hz (AC-3e) 4 kW at 415...440 V AC 50/60 Hz (AC-3e) 5.5 kW at 500 V AC 50/60 Hz (AC-3e) 5.5 kW at 660...690 V AC 50/60 Hz (AC-3e) |
| Maximum Horse Power Rating | 1 hp at 230/240 V AC 50/60 Hz for 1 phase motors 2 hp at 200/208 V AC 50/60 Hz for 3 phase motors 2 hp at 230/240 V AC 50/60 Hz for 3 phase motors 5 hp at 460/480 V AC 50/60 Hz for 3 phase motors 7.5 hp at 575/600 V AC 50/60 Hz for 3 phase motors 0.33 hp at 115 V AC 50/60 Hz for 1 phase motors |
| Compatibility Code | LC1D |
| Pole Contact Composition | 3 NO |
| Contact Compatibility | M2 |
| Protective Cover | With |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|--|--|
| [Ith] Conventional Free Air Thermal Current | 25 A (at 140 °F (60 °C)) for power circuit 10 A (at 140 °F (60 °C)) for signalling circuit |
| Irms Rated Making Capacity | 250 A at 440 V for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1 |
| Rated Breaking Capacity | 250 A at 440 V for power circuit conforming to IEC 60947 |
| [Icw] Rated Short-Time Withstand Current | 105 A 104 °F (40 °C) - 10 s for power circuit 210 A 104 °F (40 °C) - 1 s for power circuit 30 A 104 °F (40 °C) - 10 min for power circuit 61 A 104 °F (40 °C) - 1 min for power circuit 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit |
| Associated Fuse Rating | 10 A gG for signalling circuit conforming to IEC 60947-5-1 25 A gG at <= 690 V coordination type 1 for power circuit 20 A gG at <= 690 V coordination type 2 for power circuit |
| Average Impedance | 2.5 mOhm - Ith 25 A 50 Hz for power circuit |
| Power Dissipation Per Pole | 1.56 W AC-1 0.2 W AC-3 0.2 W AC-3e |
| [Ui] Rated Insulation Voltage | Power circuit 690 V IEC 60947-4-1 Power circuit 600 V CSA Power circuit 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL |
| Overvoltage Category | III |
| Pollution Degree | 3 |
| [Uimp] Rated Impulse Withstand Voltage | 6 kV IEC 60947 |
| Safety Reliability Level | B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1 |
| Mechanical Durability | 15 Mcycles |
| Electrical Durability | 0.6 Mcycles 25 A AC-1 <= 440 V 2 Mcycles 9 A AC-3 <= 440 V 2 Mcycles 9 A AC-3e <= 440 V |
| Control Circuit Type | AC 50/60 Hz |
| Coil Technology | Without built-in suppressor module |
| Control Circuit Voltage Limits | 0.3...0.6 Uc -40...158 °F (-40...70 °C) drop-out AC 50/60 Hz 0.8...1.1 Uc -40...140 °F (-40...60 °C) operational AC 50 Hz 0.85...1.1 Uc -40...140 °F (-40...60 °C) operational AC 60 Hz 1...1.1 Uc 140...158 °F (60...70 °C) operational AC 50/60 Hz |
| Inrush Power In Va | 70 VA 60 Hz cos phi 0.75 (at 68 °F (20 °C)) 70 VA 50 Hz cos phi 0.75 (at 68 °F (20 °C)) |
| Hold-In Power Consumption In Va | 7.5 VA 60 Hz cos phi 0.3 (at 68 °F (20 °C)) 7 VA 50 Hz cos phi 0.3 (at 68 °F (20 °C)) |
| Heat Dissipation | 2...3 W at 50/60 Hz |
| Operating Time | 12...22 ms closing 4...19 ms opening |
| Maximum Operating Rate | 3600 cyc/h 140 °F (60 °C) |

| | |
|--------------------------------|--|
| Connections - Terminals | Power circuit: screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible without cable end Power circuit: screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²) - cable stiffness: flexible with cable end Power circuit: screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: solid without cable end Power circuit: screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2 0.00...0.01 in ² (1...4 mm ²) - cable stiffness: solid without cable end |
|--------------------------------|--|

| | |
|--------------------------|--|
| Tightening Torque | Power circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals flat Ø 6 mm Power circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Philips No 2 Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals flat Ø 6 mm Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Philips No 2 Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals pozidriv No 2 Power circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals pozidriv No 2 |
|--------------------------|--|

| | |
|--------------------------------------|-------------|
| Auxiliary Contact Composition | 1 NO + 1 NC |
|--------------------------------------|-------------|

| | |
|--------------------------------|--|
| Auxiliary Contacts Type | Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1 |
|--------------------------------|--|

| | |
|-------------------------------------|-------------|
| Signalling Circuit Frequency | 25...400 Hz |
|-------------------------------------|-------------|

| | |
|----------------------------------|-----------------------------|
| Minimum Switching Voltage | 17 V for signalling circuit |
|----------------------------------|-----------------------------|

| | |
|----------------------------------|-----------------------------|
| Minimum Switching Current | 5 mA for signalling circuit |
|----------------------------------|-----------------------------|

| | |
|------------------------------|----------------------------------|
| Insulation Resistance | > 10 MOhm for signalling circuit |
|------------------------------|----------------------------------|

| | |
|-------------------------|---|
| Non-Overlap Time | 1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact |
|-------------------------|---|

| | |
|-------------------------|---------------|
| Mounting Support | Rail Plate |
|-------------------------|---------------|

Environment

| | |
|------------------|--|
| Standards | CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 IEC 60335-1 |
|------------------|--|

| | |
|-------------------------------|---|
| Product Certifications | UL GOST BV RINA CSA CCC LROS (Lloyds register of shipping) DNV GL UKCA |
|-------------------------------|---|

| | |
|--------------------------------|---------------------------|
| Ip Degree Of Protection | IP20 front face IEC 60529 |
|--------------------------------|---------------------------|

| | |
|-----------------------------|------------------|
| Protective Treatment | THIEC 60068-2-30 |
|-----------------------------|------------------|

| | |
|---------------------------|--|
| Climatic Withstand | IACS E10 exposure to damp heat IEC 60947-1 Annex Q category D exposure to damp heat |
|---------------------------|--|

| | |
|--|--|
| Permissible Ambient Air Temperature Around The Device | -40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating |
| Operating Altitude | 0...9842.52 ft (0...3000 m) |
| Fire Resistance | 1562 °F (850 °C) IEC 60695-2-1 |
| Flame Retardance | V1 conforming to UL 94 |
| Mechanical Robustness | Vibrations contactor open 2 Gn, 5...300 Hz) Vibrations contactor closed 4 Gn, 5...300 Hz) Shocks contactor open 10 Gn for 11 ms) Shocks contactor closed 15 Gn for 11 ms) |
| Height | 3.03 in (77 mm) |
| Width | 1.77 in (45 mm) |
| Depth | 3.39 in (86 mm) |
| Net Weight | 0.71 lb(US) (0.32 kg) |

Ordering and shipping details

| | |
|--------------------------|---------------|
| Category | US10I1222354 |
| Discount Schedule | 0I12 |
| Gtin | 3389110348897 |
| Returnability | No |
| Country Of Origin | FR |

Packing Units

| | |
|-------------------------------------|-------------------------|
| Unit Type Of Package 1 | PCE |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 2.05 in (5.2 cm) |
| Package 1 Width | 3.62 in (9.2 cm) |
| Package 1 Length | 4.41 in (11.2 cm) |
| Package 1 Weight | 12.49 oz (354.0 g) |
| Unit Type Of Package 2 | S02 |
| Number Of Units In Package 2 | 20 |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 16.37 lb(US) (7.427 kg) |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty | 18 months |
|-----------------|-----------|

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓ Reach Free Of Svhc

✓ Toxic Heavy Metal Free

✓ Mercury Free

✓ Rohs Exemption Information [Yes](#)

✓ Pvc Free

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu Rohs Directive

Compliant

[EU RoHS Declaration](#)

China Rohs Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile



[End of Life Information](#)

California Proposition 65

WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov



Dimensions

CONTACTOR WITH AC COIL

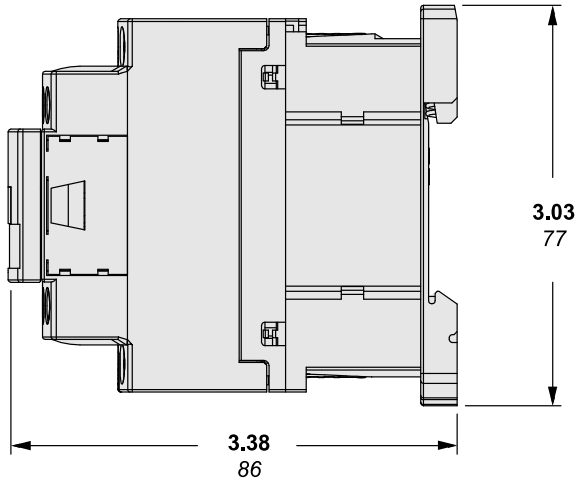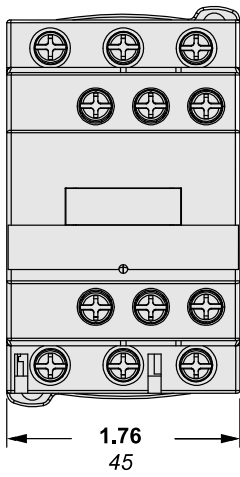

in.
mm

CONTACTOR WITH DC COIL

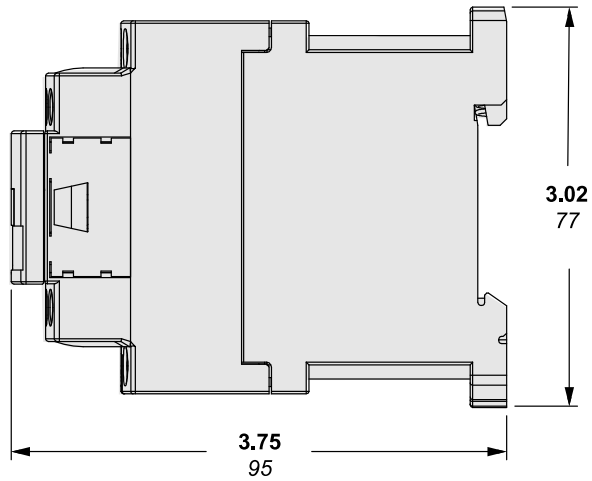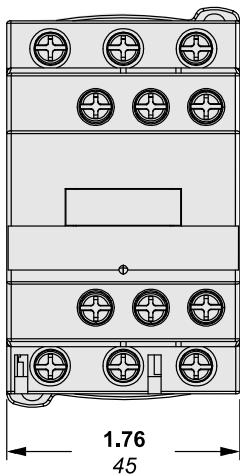

All dimensions are approximate. Also refer to technical drawings and documentation.